


## Standard Avalanche Sinterglass Diode

### Features

- Controlled avalanche characteristics
- Glass passivated
- Low reverse current
- High surge current loading
- Hermetically sealed axial-led glass envelope

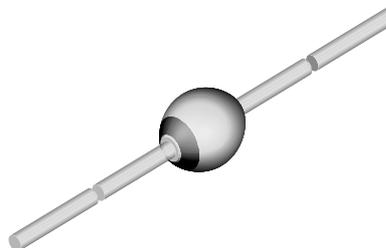

949539

### Applications

Rectification diode, general purpose

### Mechanical Data

**Case:** Sintered glass case, SOD 57

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Mounting Position:** Any

**Weight:** 370 mg, (max. 500 mg)

**Polarity:** Color band denotes cathode end

### Parts Table

Part	Type differentiation	Package
1N5059	$V_R = 200\text{ V}; I_{FAV} = 2\text{ A}$	SOD57
1N5060	$V_R = 400\text{ V}; I_{FAV} = 2\text{ A}$	SOD57
1N5061	$V_R = 600\text{ V}; I_{FAV} = 2\text{ A}$	SOD57
1N5062	$V_R = 800\text{ V}; I_{FAV} = 2\text{ A}$	SOD57

### Absolute Maximum Ratings

$T_{amb} = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Test condition	Sub type	Symbol	Value	Unit
Reverse voltage = Repetitive peak reverse voltage	see electrical characteristics	1N5059	$V_R = V_{RRM}$	200	V
	see electrical characteristics	1N5060	$V_R = V_{RRM}$	400	V
	see electrical characteristics	1N5061	$V_R = V_{RRM}$	600	V
	see electrical characteristics	1N5062	$V_R = V_{RRM}$	800	V
Peak forward surge current	$t_p = 10\text{ ms}$ , half-sinewave		$I_{FSM}$	50	A
Average forward current	$R_{thJA} = 45\text{ K/W}$ , $T_{amb} = 50\text{ }^\circ\text{C}$		$I_{FAV}$	2	A
	$R_{thJA} = 100\text{ K/W}$ , $T_{amb} = 75\text{ }^\circ\text{C}$		$I_{FAV}$	0.8	A
Junction and storage temperature range			$T_j = T_{stg}$	-55 to +175	$^\circ\text{C}$
Max. pulse energy in avalanche mode, non repetitive (inductive load switch off)	$I_{(BR)R} = 1\text{ A}$ , inductive load		$E_R$	20	mJ

### Maximum Thermal Resistance

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Sub type	Symbol	Value	Unit
Junction ambient	Lead length $l = 10\text{ mm}$ , $T_L = \text{constant}$		$R_{thJA}$	45	K/W
	on PC board with spacing 25 mm		$R_{thJA}$	100	K/W

### Electrical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$ , unless otherwise specified

Parameter	Test condition	Sub type	Symbol	Min	Typ.	Max	Unit
Forward voltage	$I_F = 1\text{ A}$		$V_F$			1	V
	$I_F = 2.5\text{ A}$		$V_F$			1.15	V
Reverse current	$V_R = V_{RRM}$		$I_R$			1	$\mu\text{A}$
	$V_R = V_{RRM}$ , $T_j = 100\text{ }^{\circ}\text{C}$		$I_R$			10	$\mu\text{A}$
	$V_R = V_{RRM}$ , $T_j = 150\text{ }^{\circ}\text{C}$		$I_R$			100	$\mu\text{A}$
Reverse breakdown voltage	$I_R = 100\text{ }\mu\text{A}$	1N5059	$V_{(BR)R}$	225		1600	V
	$I_R = 100\text{ }\mu\text{A}$	1N5060	$V_{(BR)R}$	450		1600	V
	$I_R = 100\text{ }\mu\text{A}$	1N5061	$V_{(BR)R}$	650		1600	V
	$I_R = 100\text{ }\mu\text{A}$	1N5062	$V_{(BR)R}$	900		1600	V
Reverse recovery time	$I_F = 0.5\text{ A}$ , $I_R = 1\text{ A}$ , $i_R = 0.25\text{ A}$		$t_{rr}$			4	$\mu\text{s}$
Diode capacitance	$V_R = 0\text{ V}$ , $f = 1\text{ MHz}$		$C_D$		40		pF

### Typical Characteristics ( $T_{amb} = 25\text{ }^{\circ}\text{C}$ unless otherwise specified)

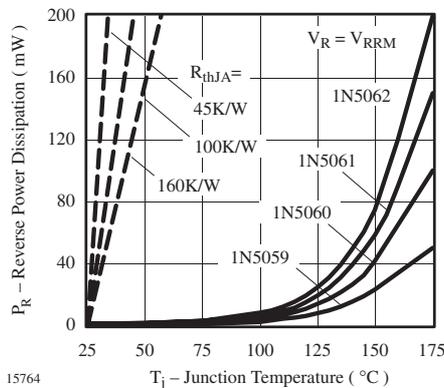


Figure 1. Max. Reverse Power Dissipation vs. Junction Temperature

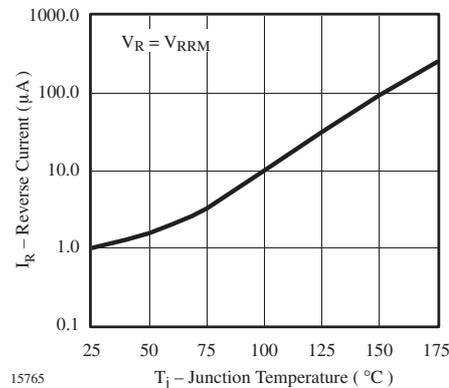


Figure 2. Max. Reverse Current vs. Junction Temperature

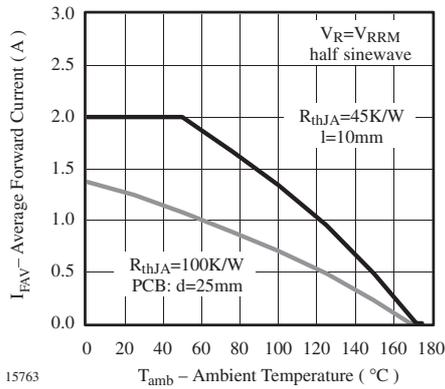


Figure 3. Max. Average Forward Current vs. Ambient Temperature

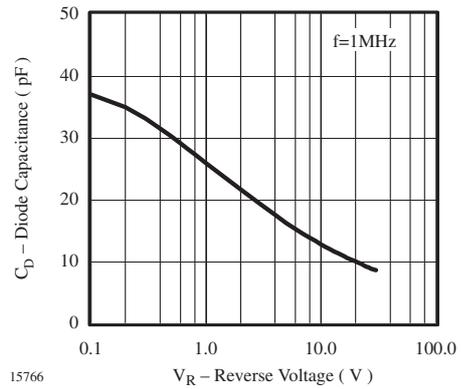


Figure 5. Typ. Diode Capacitance vs. Reverse Voltage


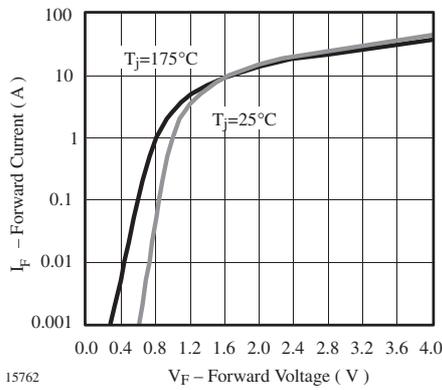


Figure 4. Max. Forward Current vs. Forward Voltage

## Package Dimensions in mm

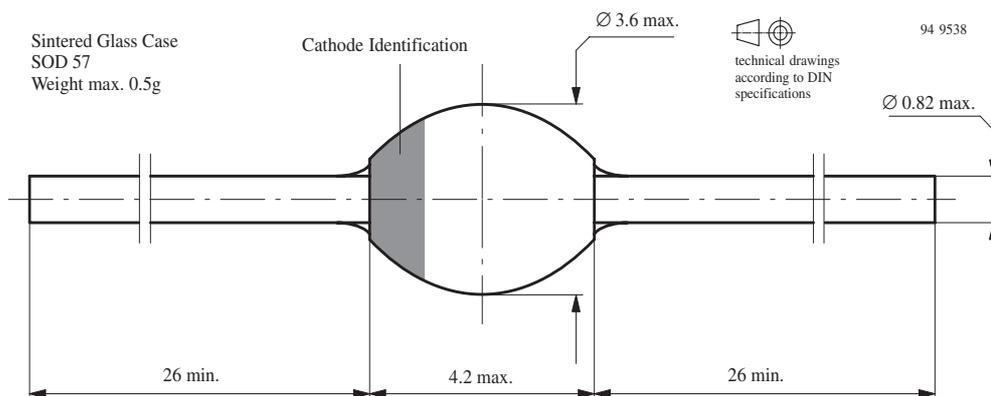

### Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

**Vishay Semiconductor GmbH** has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

**Vishay Semiconductor GmbH** can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

**We reserve the right to make changes to improve technical design  
and may do so without further notice.**

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay Semiconductors products for any unintended or unauthorized application, the buyer shall indemnify Vishay Semiconductors against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany  
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423

This datasheet has been download from:

[www.datasheetcatalog.com](http://www.datasheetcatalog.com)

Datasheets for electronics components.