


Parallel all diodes by film caps to avoid ringing C11 - C25 47n 630VDC / 400VAC WIMA

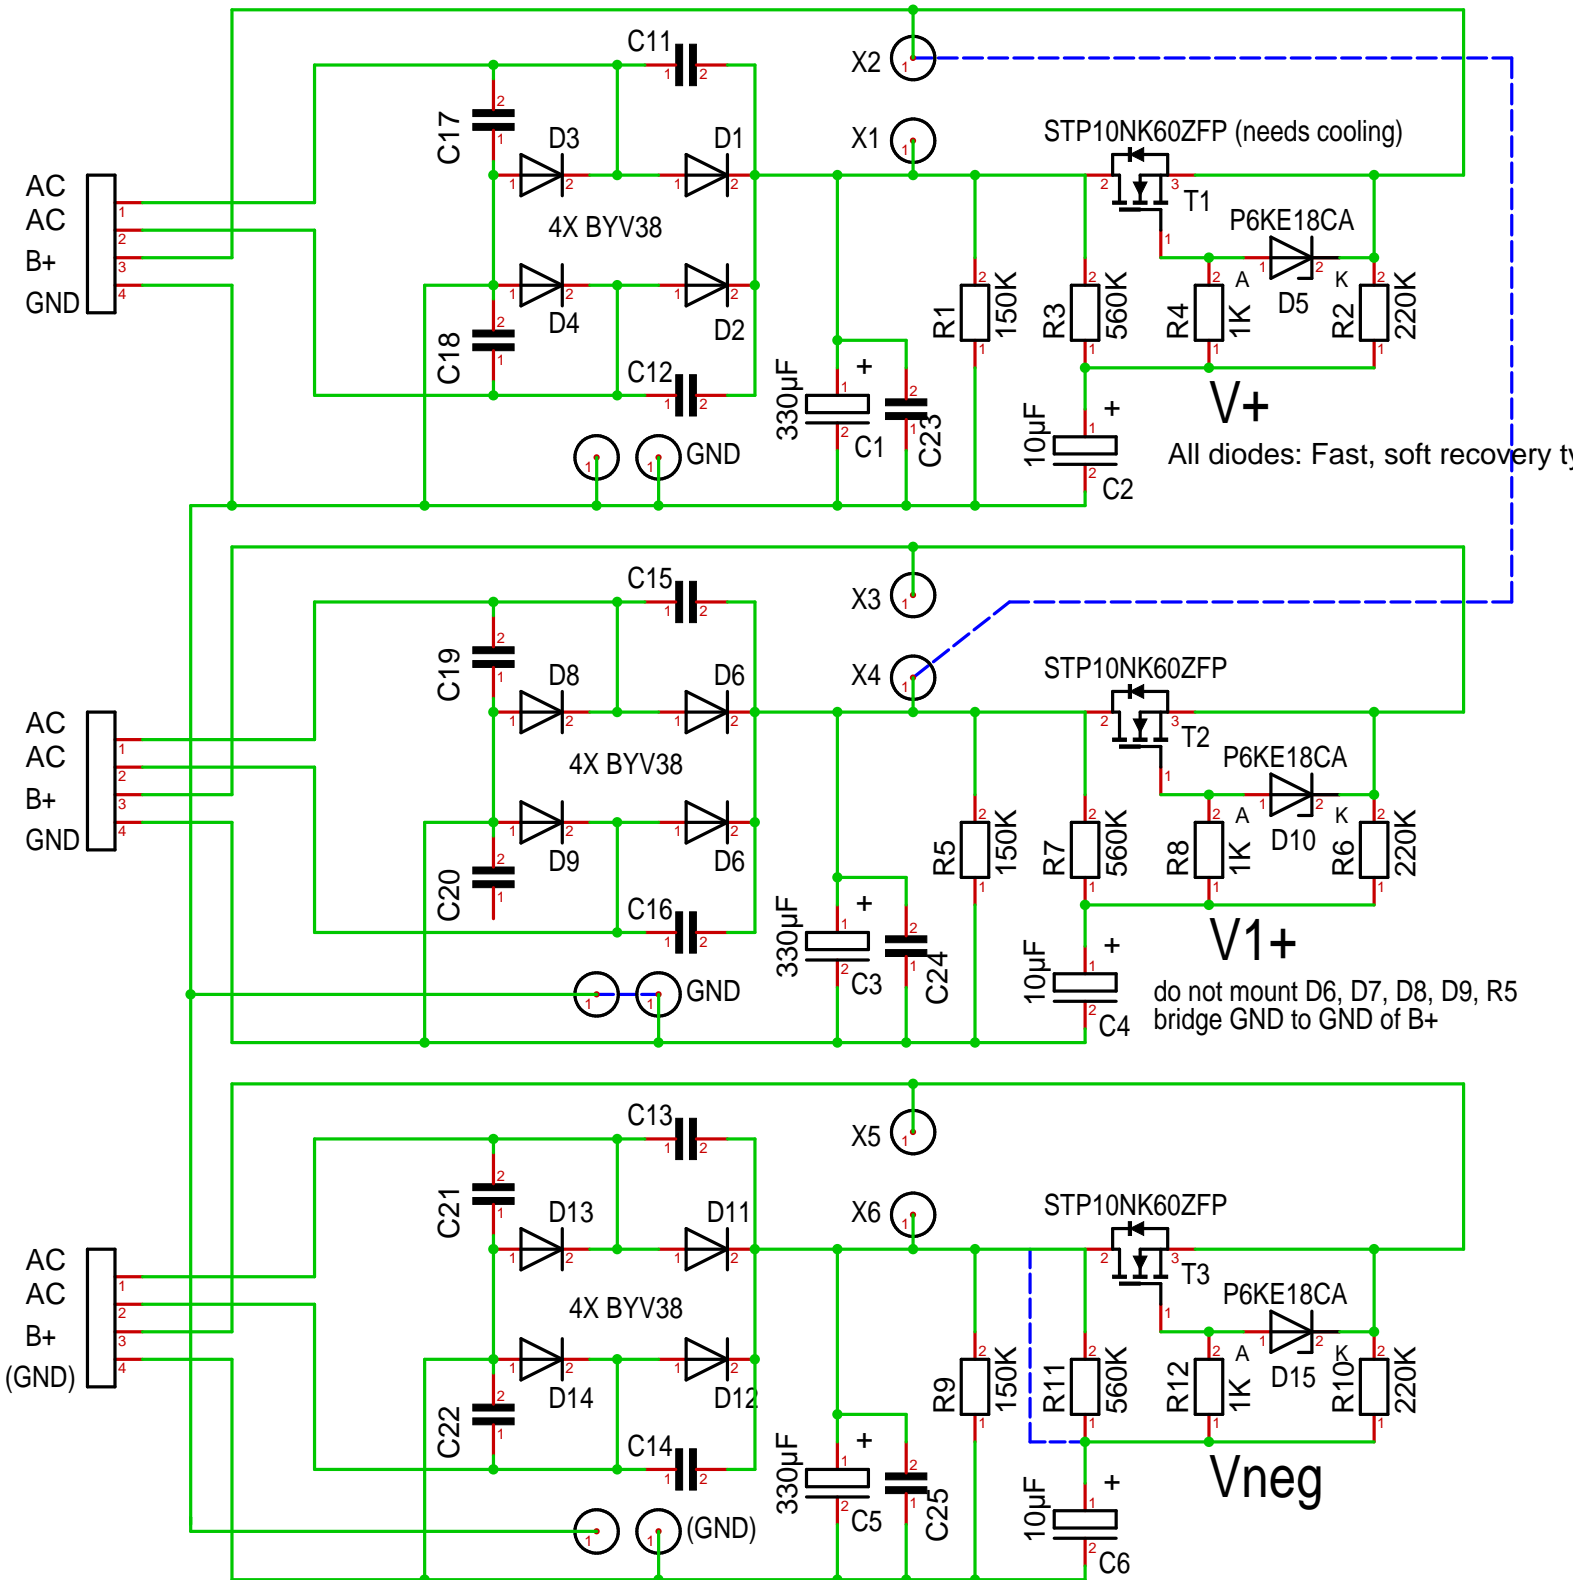

All diodes: Fast, soft recovery ty

do not mount D6, D7, D8, D9, R5
bridge GND to GND of B+

for Vneg do not mount R10, R11, R12, D15, T3
replace C5 by 680u 200V, C6 by 330u 100V
bridge R11, bridge X5 and X6
bridge B+ to GND of B+ and B1+, (GND) becomes Vneg