

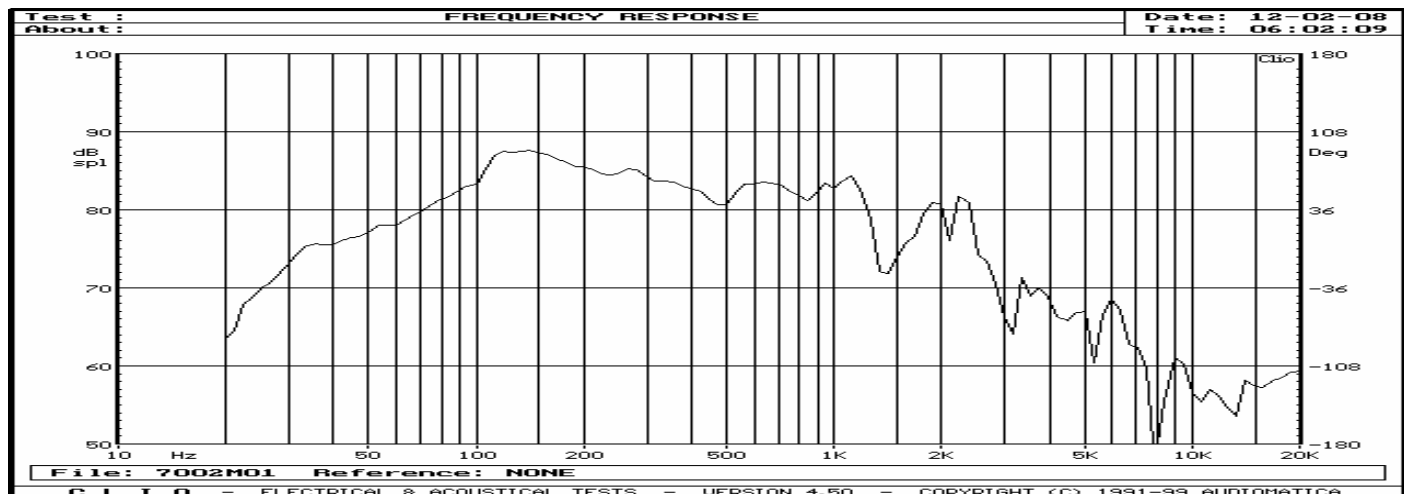


ITEMS:	SPECIFICATION:	VOICE COIL:
Dimensions	211mm ( 8")	Diameter 49.5 (mm)
Impedance	4 ohms	Length 24.5 (mm)
Input	RATED 120W, MAX 240W	Layer 4 (mm)
Free air resonance	28 ±5Hz	Former material Kapton
Sensitivity	88 ±2dB (W/M)	Wire material Copper
Frequency range	fo ~ 2000Hz	CONE PAPER:
Sine wave test	10V	Cone material Non-Pressed
Weight	4200grams	Surround material Foam
Life test	120W, 8H , EIA white noise	MAGNET:
		(1) (2)
		Diameter 145 (mm)
		Height 22 (mm)
		Quantity
		Weight 1330 (g)
		Gap(H) 8 (mm)

PARAMETERS:									
DC resistance	Re:	3.2	(Ω)	Moving mass	Mms:	64.09	(g)		
Resonance frequency	Fs:	27.94	(Hz)	Equivalent volume	Vas:	31.55	(l)		
Maximum impedance	Zm:	214.01	(Ω)	Sensitivity	SPL:	88	(dB)		
Mechanical Q factor	Qms:	12.11		Suspension compliance	Cms:	0.51	(mm/N)		
Electrical Q factor	Qes:	0.18		BL product	Bl:	14.0	(N/A)		
Total Q factor	Qts:	0.18		Driver piston diameter	D:	164	(mm)		
Linear Displacement	Xmax:	8.25	(mm)	Voice Coil Inductance	Le(1K):	2.35	(mH)		

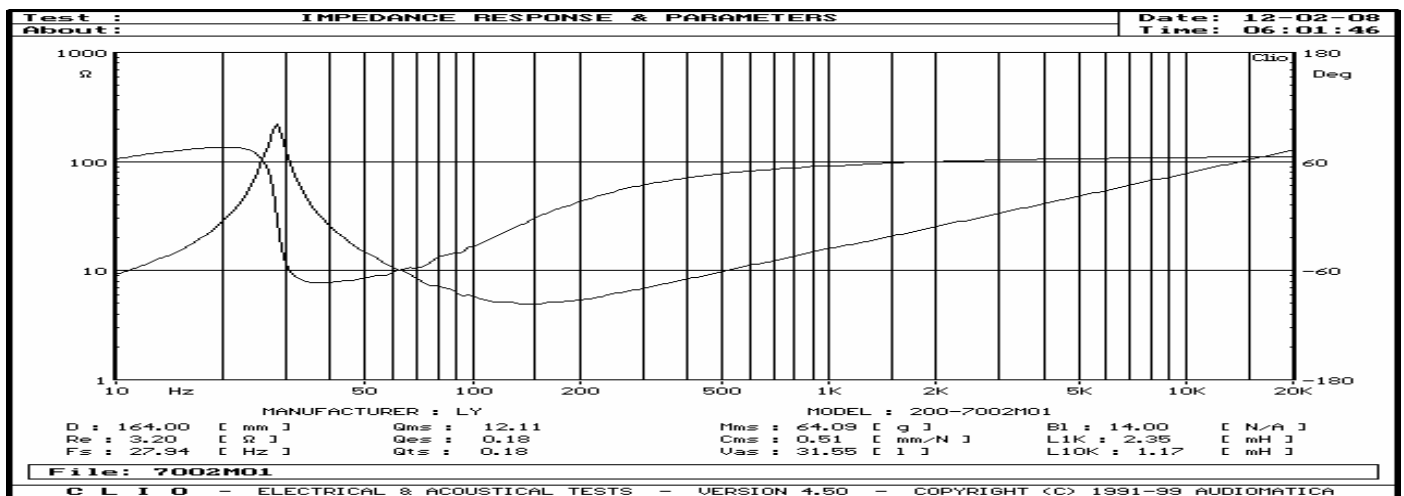

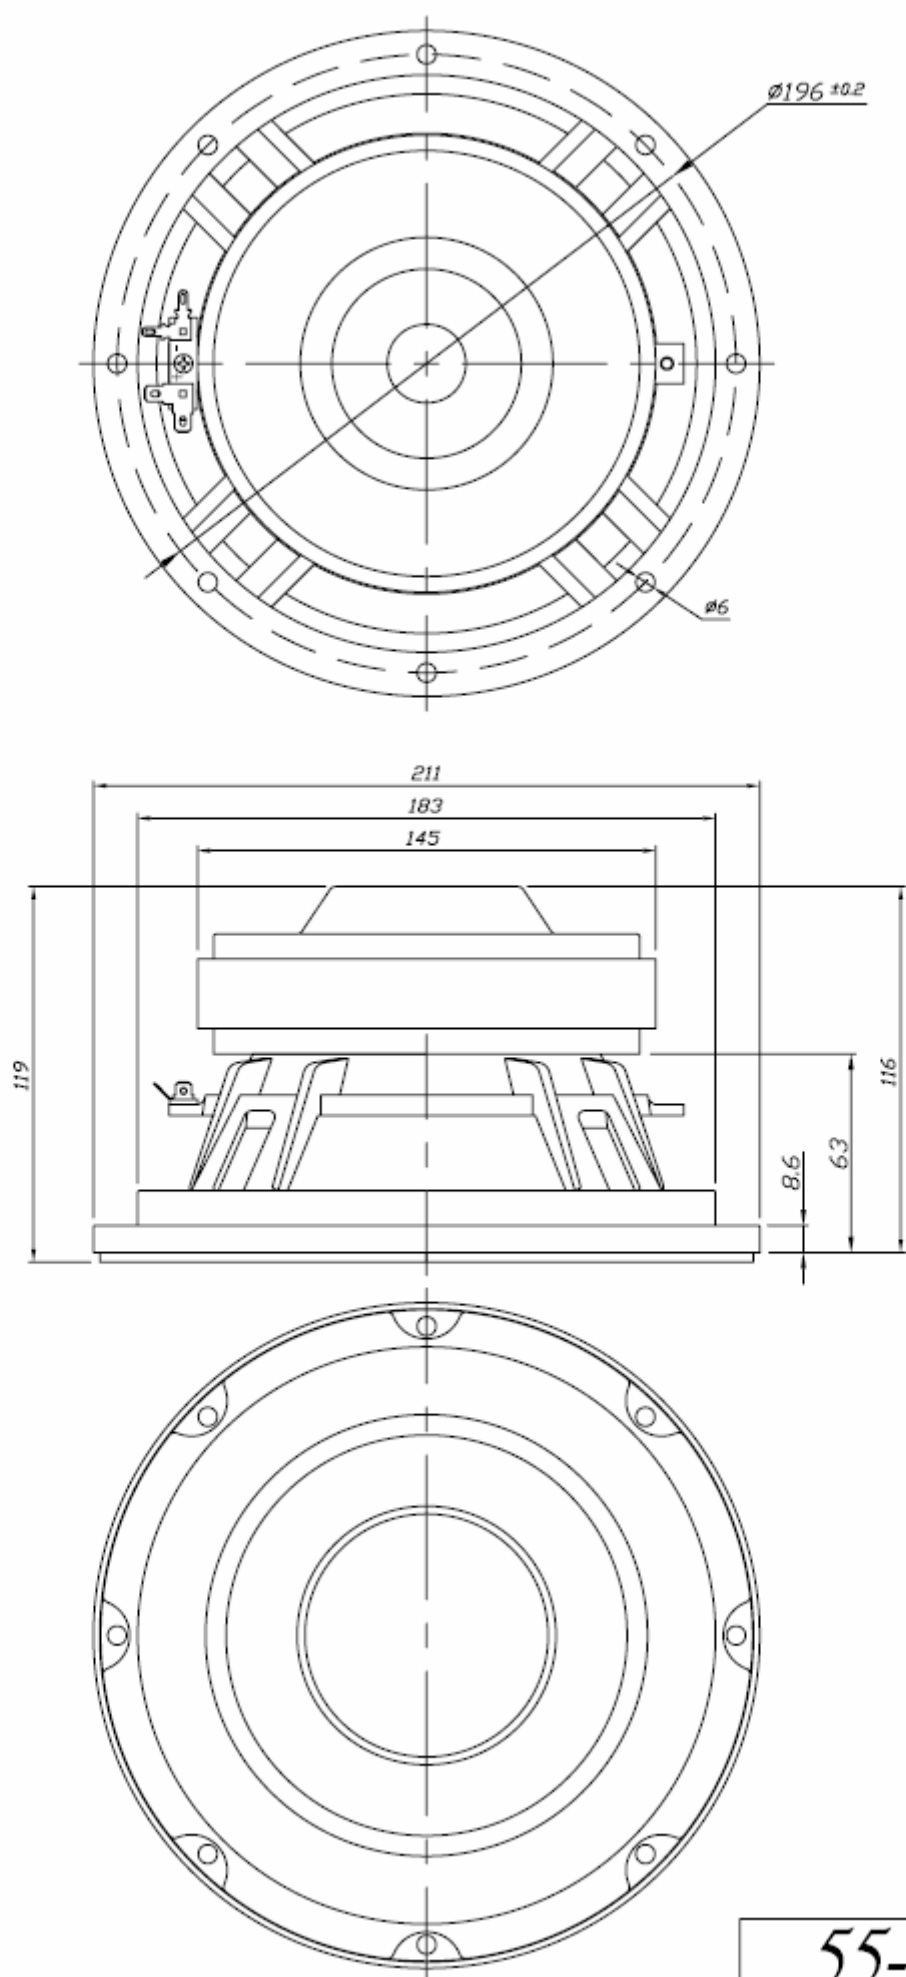

55-3421