

REF-11MKII



SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 6 ohm
- * Recommended Amp Power: 10-75W
- * Frequency Response: 60 Hz - 25 kHz (-6dB)
- * Sensitivity: 90 dB / 2,83V / 1 m
- * Crossover frequency: 4 kHz

SYSTEM COMPONENTS:

- * Cabinet: CREF-11 MKII (Not for sale)
- * Grille: GREF-11 MKII (2408040)
- * Woofer: W70410-5 130mm Woofer Coated Paper

SYSTEM COMPONENTS: (cont'd)

- * Tweeter: TW010IY Gold 10mm Gold Plated Polymer dome tweeter
- * Crossover Network: NREF-11 MKII (2708310)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 11,8x6,7x8,5 In. D (372x208x244mm D)
- * Shipping Weight: 28.5 lbs. (13 kg.)

WARRANTY INFORMATION:

- * Refer to the Warranty Statement packed with each product


PACKAGE

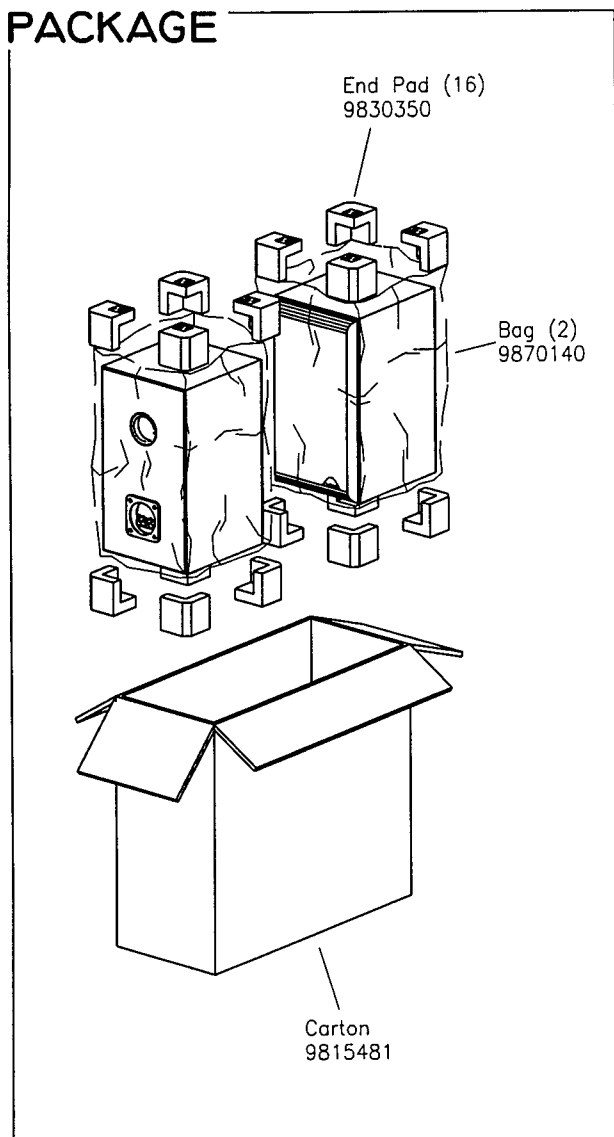


WIRING DIAGRAM

Tweeter
TW010IY Gold
(9747010)

Woofer
W70410-5
(9747110)

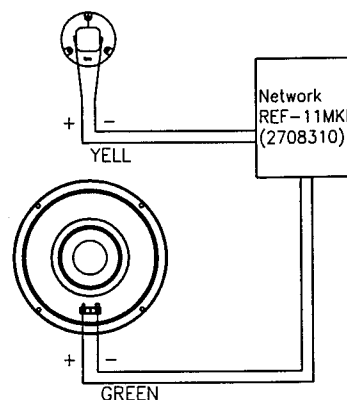

SCHEMATIC REF-11 MKII

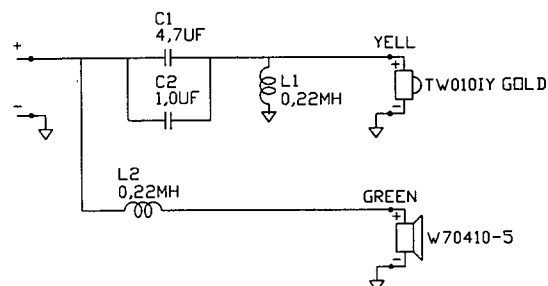

NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.
DEFECTIVE DRIVER SHOULD BE REPLACED.

REF-11MKII

REF-11MKII

COMPONENT EXPLODED VIEW

