


1 2 3 4 5 6 7 8 9 10 11

A B C D E F G H

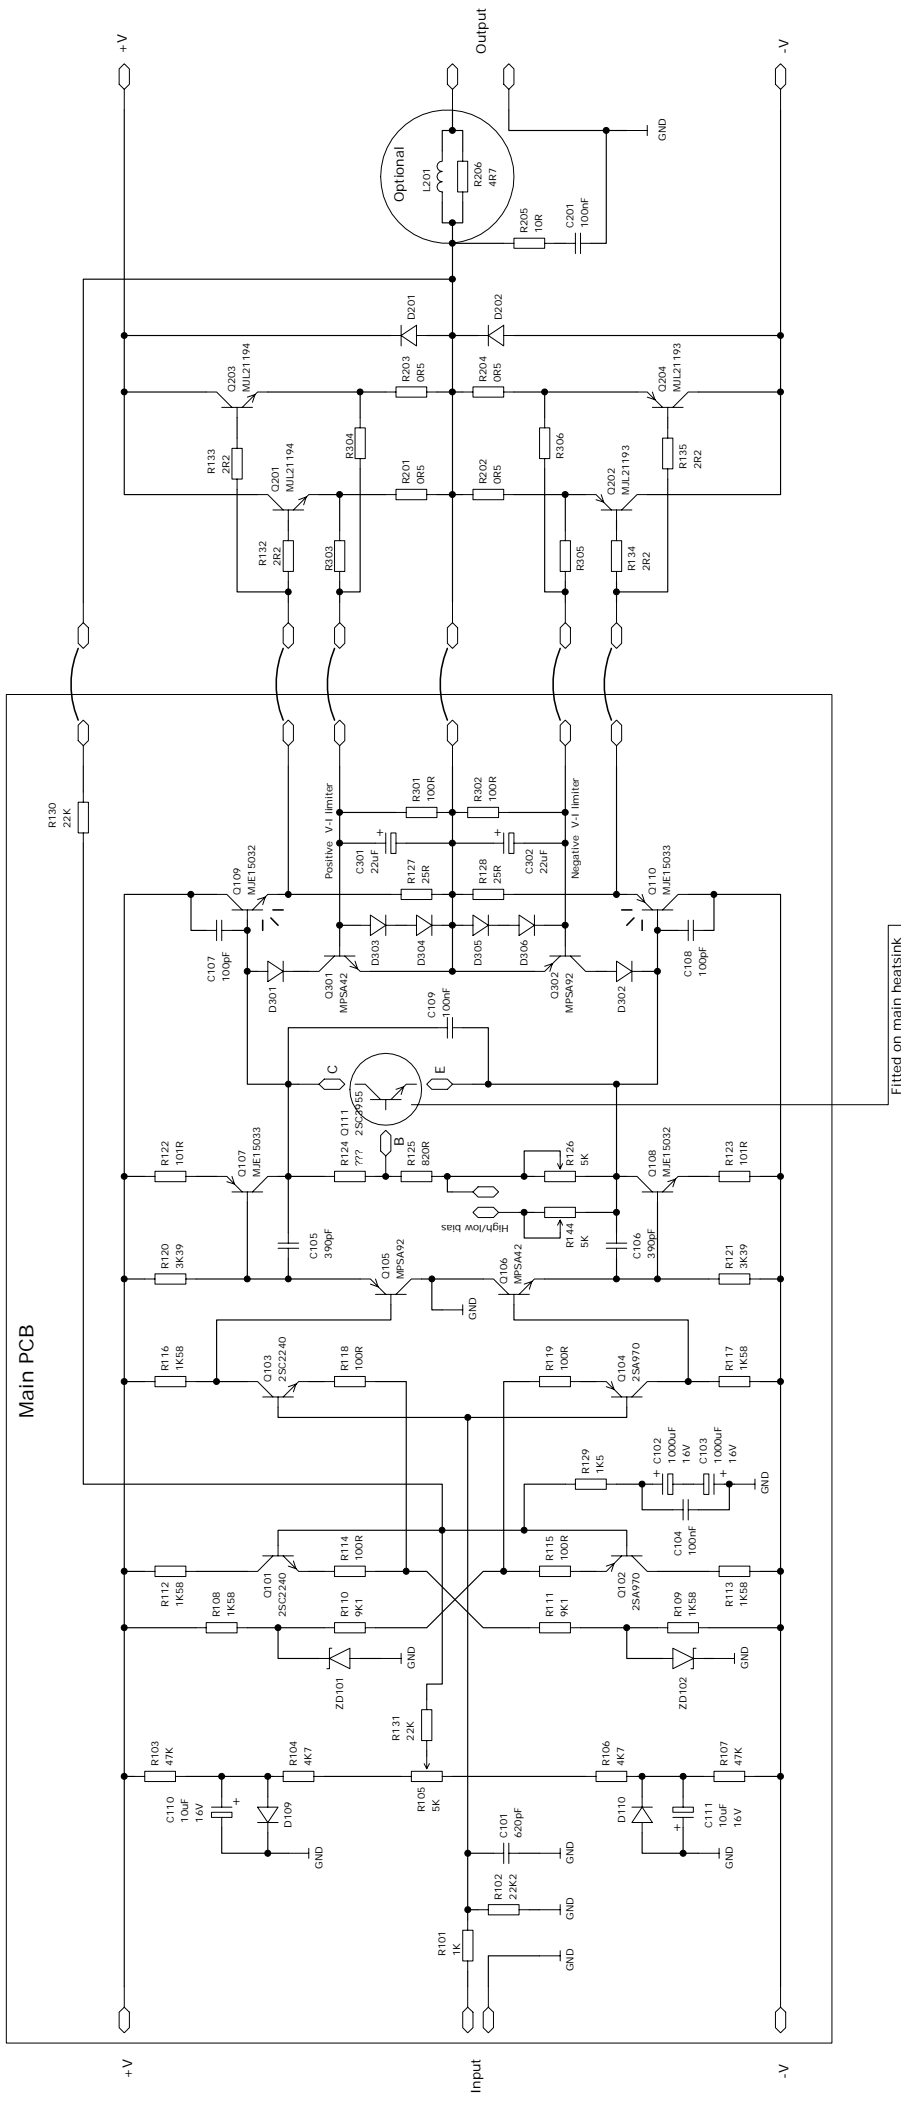

Notes!
Components designated 1xx are placed on main PCB
Components designated 2xx are placed on heatsink or speaker binding posts
Components designated 3xx are additional output protection circuit
All capacitors 100V except where designated otherwise
Q111 and C109 are placed on main heatsink
Q107 and Q108 must be fitted with suitable heatsink
V-I Limiter: 1: (R303/R304/Rxxx) = app. 100R for safe SOA

DELTA AUDIO DENMARK		Krell-Clone KSA-50		Krell-Clone KSA-50 Clone	
www.delta-audio.com		Project		Circuit Maps	
Copyright		R&D		A3	
Date		Rev.		Size	
17.10.2004		1.1		A3	
Date		Rev.		Status	
21.10.2004		1.2		Sheet	
Date		Rev.		1 of 1	
23.10.2004		1.3		Sheet	
Date		Rev.		1.4	
23.10.2004		1.4		Sheet	