

### FEATURES

- High output exciter design
- Specially designed neodymium motor and proprietary 2-layer voice coil
- 3M™ VHB™ adhesive ring with four mounting holes
- Low inductance motor for extended response


### APPLICATIONS

- Invisible home theater and multi-room audio
- Electronic gaming machines
- Advertising signage
- Point-of-purchase displays
- Multimedia exhibits
- Commercial distributed audio
- Kiosks
- Automotive audio
- Bathroom tubs and showers

### PARAMETERS


Impedance	4 ohms
Re	4.3 ohms
Le	0.41 mH @ 1 kHz
Fs	365 Hz
Qms	N/A
Qes	N/A
Qts	0.73
Mms	1.3 g
Cms	0.0001 mm/N
Sd	N/A
Vd	N/A
BL	4.29 Tm
Vas	N/A
Xmax	N/A
VC Diameter	25 mm
SPL	N/A
RMS Power Handling	20 watts
Usable Frequency Range (Hz)	N/A

### IMPEDANCE/PHASE

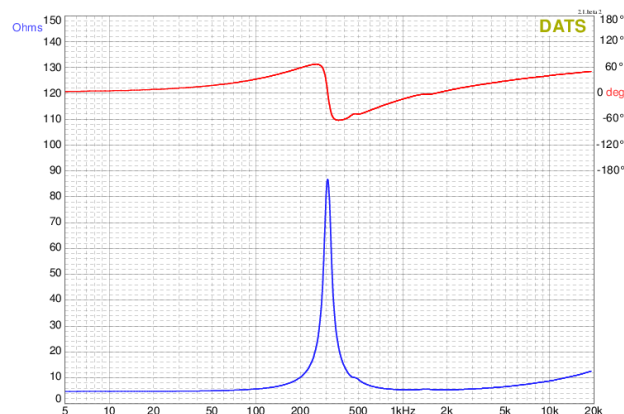

Measurement taken with transducer uncoupled facing upward.

### FREQUENCY RESPONSE

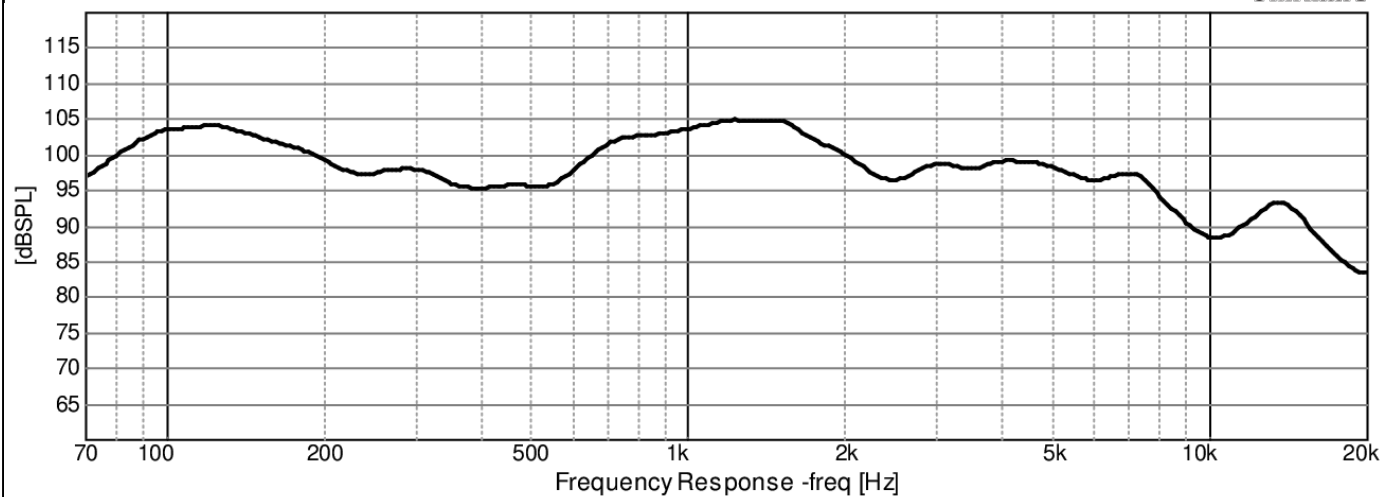

OmniMic

1/3<sup>rd</sup> octave smoothing - measurement taken with transducer adhered off-center  
on a 12" x 12" x 1/2" foam core board in an infinite baffle setup.

*Note: This information is for comparison purposes only, the actual frequency response will depend on many factors of which the diaphragm being the greatest contributor.*