




Part No. LX34-2

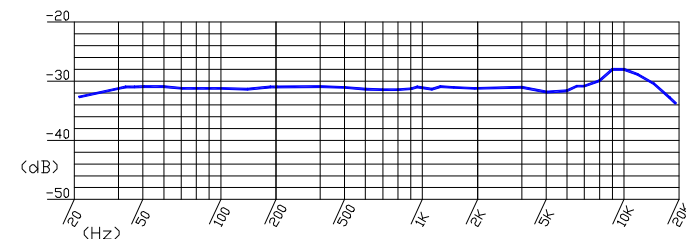


Frequency Response

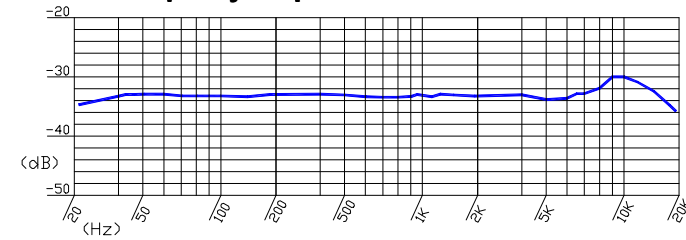


Frequency Response

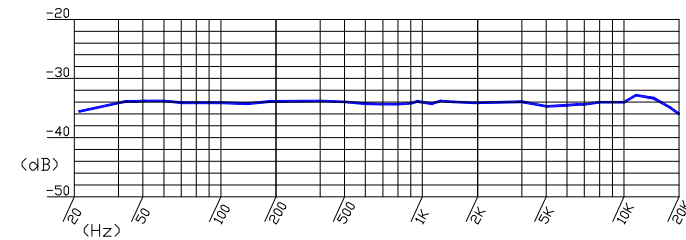


Frequency Response



**Uni-directional
(at 1kHz)**



**Figure 8
(at 1kHz)**



**Omni
(at 1kHz)**

Specifications

Item	Description
Element	Pure condenser
dimensions	Φ 34×13mm
Polar Pattern	Uni/ Figure8/Omni
Diaphragm	Double
Sensitivity	-32dB/-34dB /-35dB (0dB=1V/Pa at 1KHz)
Frequency	30Hz ~ 20KHz
Capacitor	56PF ± 3PF
Output Impedance	200 Ω ± 30% (at 1kHz)
Self Noise	14 /15 /16 dB A
Max Input SPL	135dB (at 1kHz≤1% T.H.D) 145dB (with 10dB pad)
Phantom Power Requirement	48V DC Phantom
Material	Copper
Net weight	58g
<div><div>www.lxmico.com</div><div>John Gu<div>sales@lxmico.com</div></div></div>	

