




For more Hi-Fi manuals and set-up information
please visit www.hifiengine.com

HEATHKIT AUDIO AMPLIFIER

MODEL A-9C

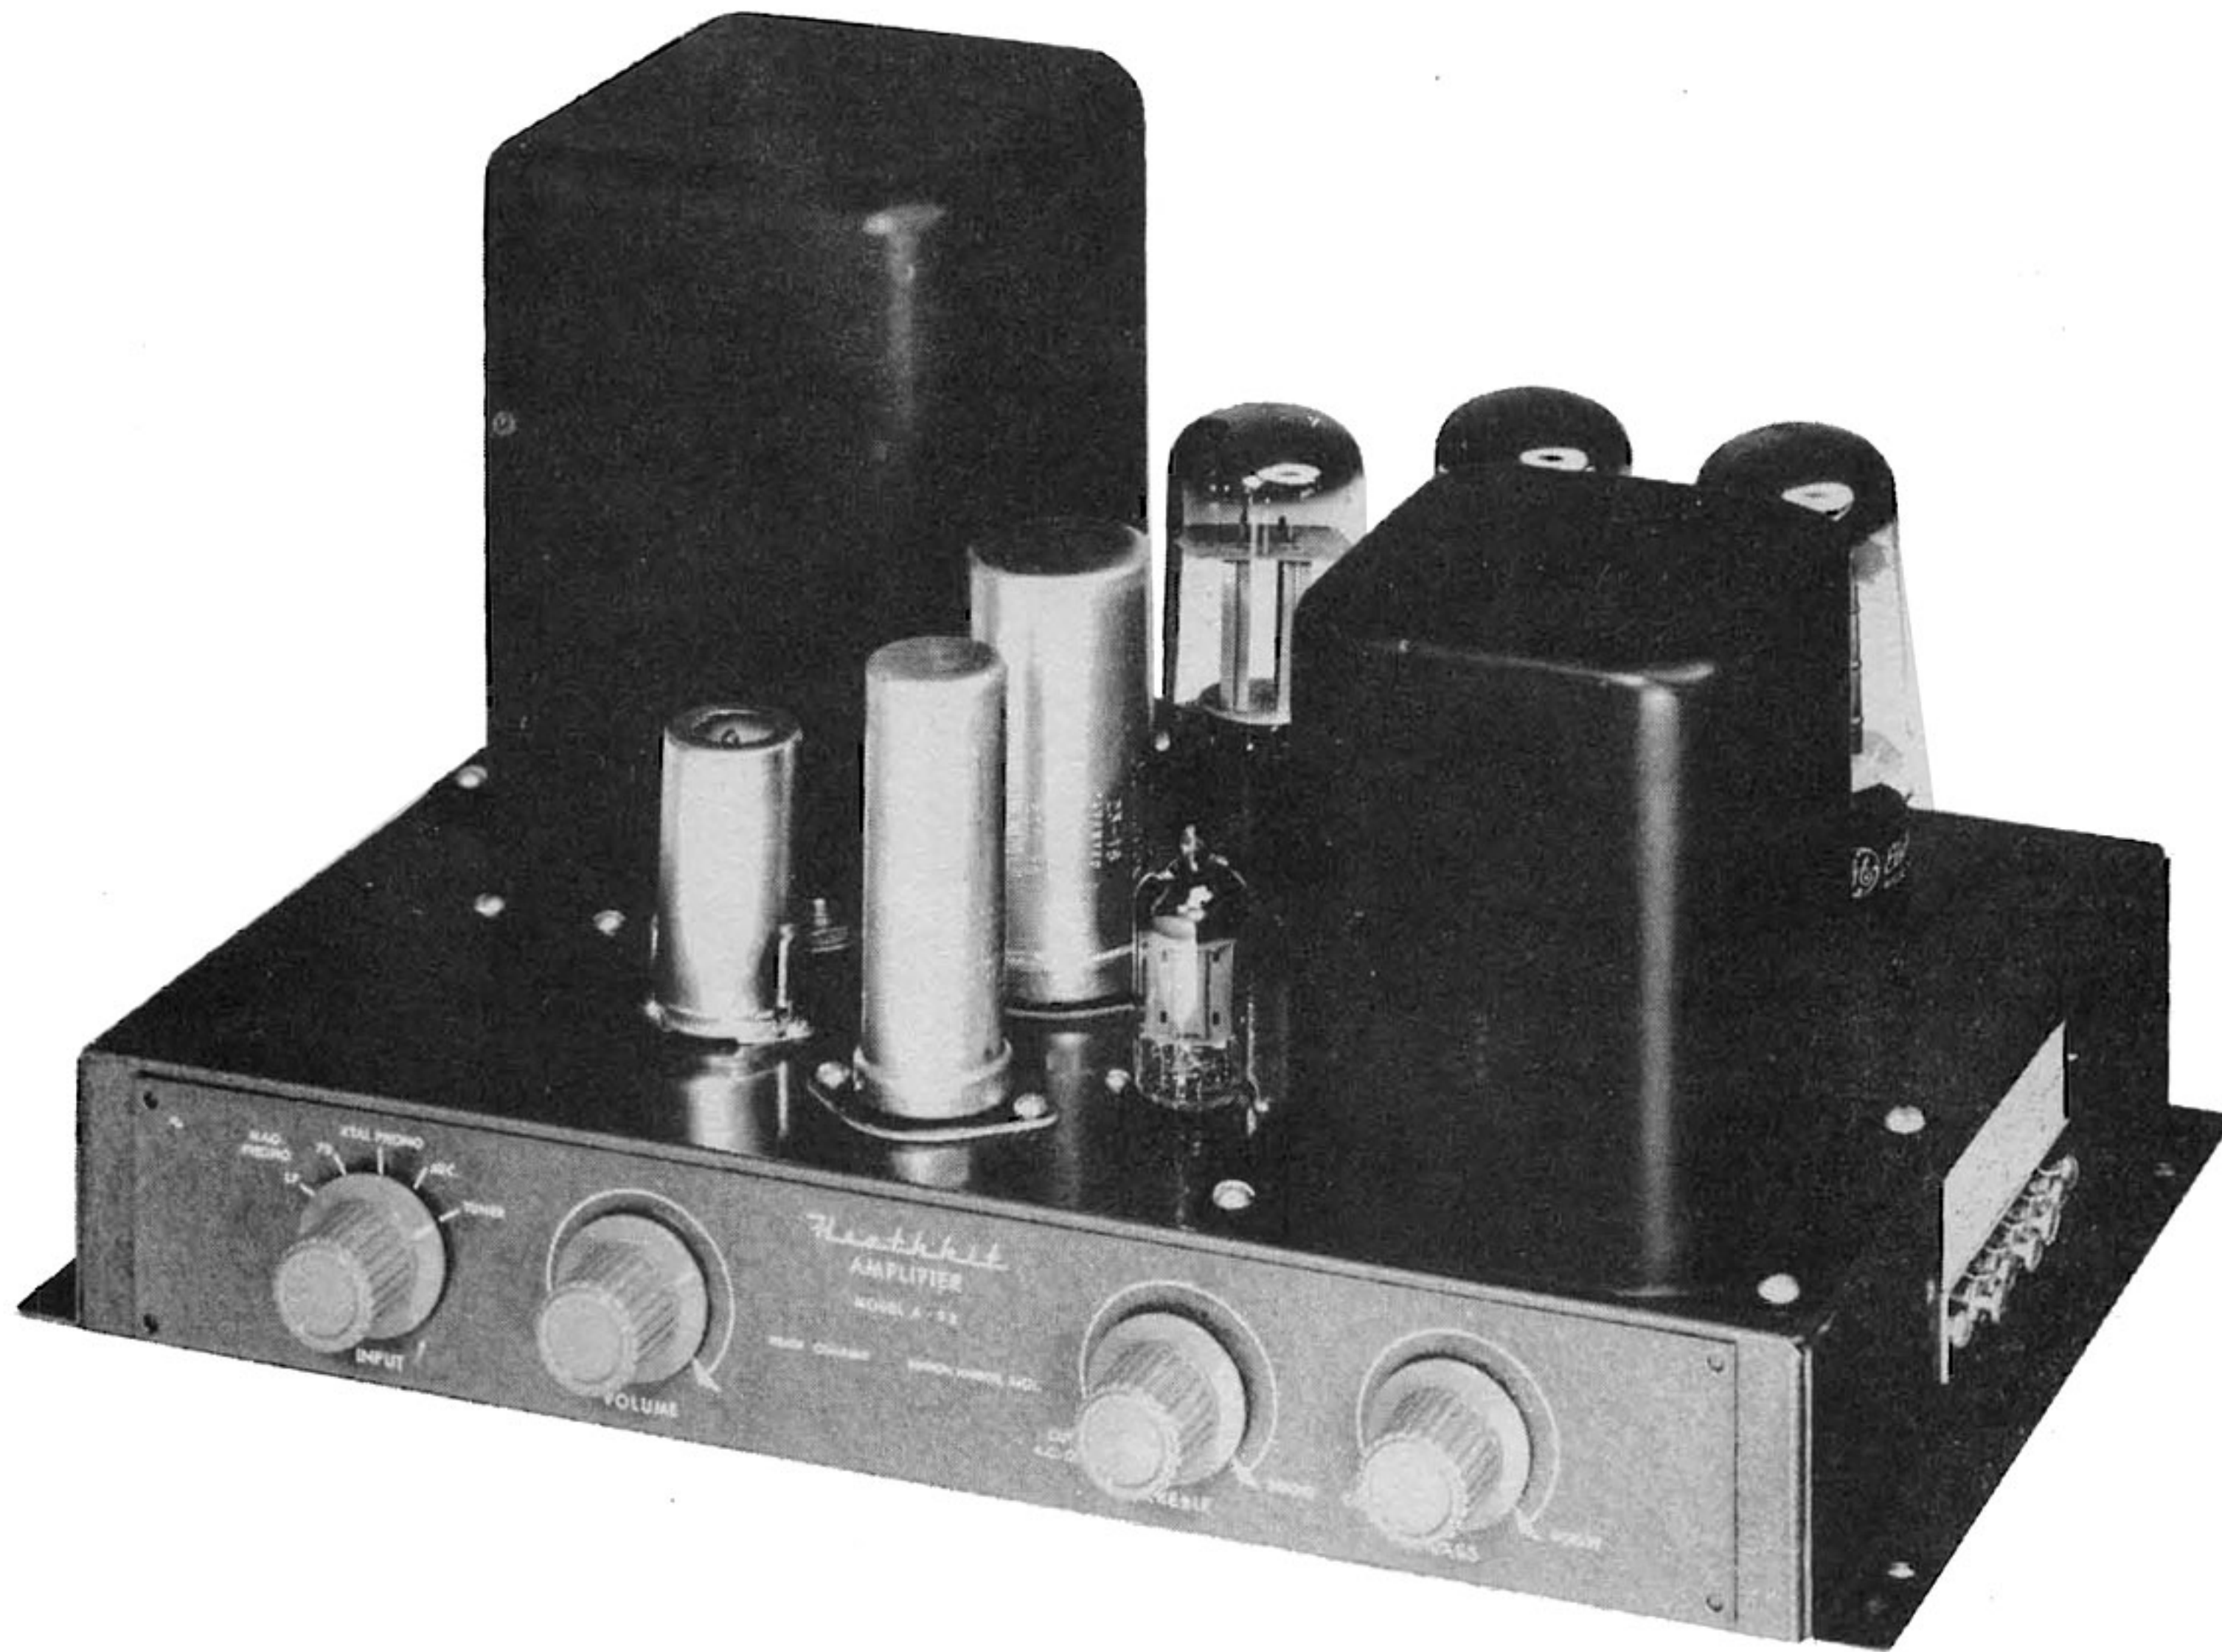

SPECIFICATIONS

| | |
|--|--|
| Frequency Response..... | ±1 db 20 to 20,000 cps |
| Power Output..... | 20 watts |
| Total Harmonic Distortion..... | 1% (at rated output) |
| Input Requirements (for 15 watts output) | |
| Magnetic Phono Input..... | 0.007 volts |
| Microphone Input..... | 0.01 volts |
| Crystal Phono Input..... | 0.08 volts |
| Tuner Input..... | 0.6 volts |
| Tone Controls | |
| Bass (at 30 cps)..... | 15 db boost, 15 db cut |
| Treble (at 15 kc)..... | 15 db boost, 20 db cut |
| Power Requirements..... | 100 watts, 105-125 volts 50/60 cycle AC |
| Tube Complement..... | 12AX7 magnetic phono preamplifier and input amplifier 12AU7 voltage amplifier and tone control amplifier 12AU7 voltage amplifier and phase splitter Two 6L6G push-pull pentode power amplifiers 5V4G Rectifier |
| Dimensions..... | 14" x 8 7/8" x 7 3/8" high |
| Shipping Weight..... | 23 lbs. |

