

THT POWER INDUCTORS

For Class D and Digital Amplifier Applications



NEW!




- Low cost, using gapped toroid technology
- Designed to match Zetex IC ZXCD1000 (PG0035, PG0036 and PG0058) and ZXCW8100 (PG0058)
- Robust with high performance

Electrical Specifications @ 25°C — Operating Temperature -40°C to +125°C


Part Number	Inductance @ Irated (μH TYP)	Irated ² (A)	DCR (mΩ)		Inductance @ 0A _{DC} (μH ±10%)	Saturation Current I _{SAT} ³ (A)			Heating Current I _{DC} ⁴ (A)
			TYP	MAX		@ -40°C	@ 25°C	@ 120°C	
PG0035 (with base)	19.5	3	66	93	20	7.0	6.0	4.0	3
PG0036	19.5	3	74	93	20	7.0	6.0	4.0	3
PG0058	19.5	8	8.6	12	20	8.5	8.0	7.0	11

Mechanicals

PG0035

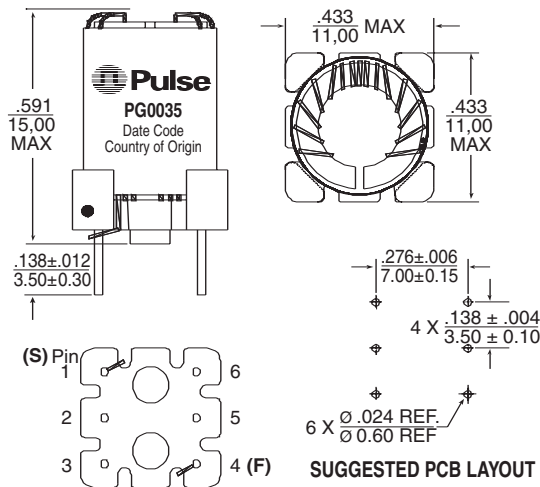


PG0058

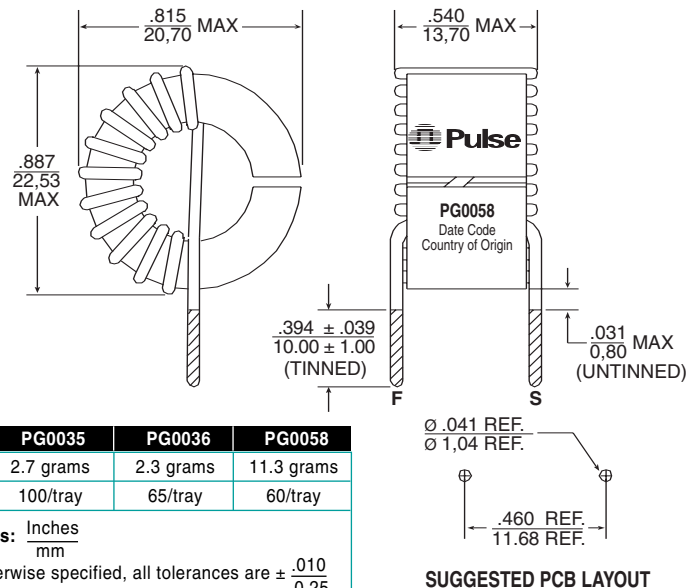


	PG0035	PG0036	PG0058
Weight	2.7 grams	2.3 grams	11.3 grams
Tray	100/tray	65/tray	60/tray
Dimensions: $\frac{\text{Inches}}{\text{mm}}$ Unless otherwise specified, all tolerances are $\pm \frac{.010}{0.25}$			

PG0036

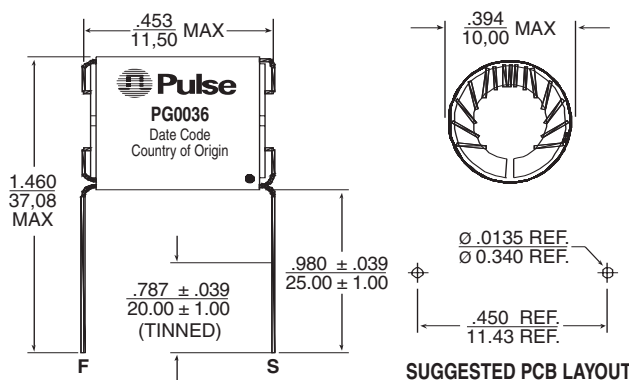

Schematic



PG0035 / PG0036 / PG0058

THT POWER INDUCTORS


For Class D and Digital Amplifier Applications




Notes from Table

1. Inductance at I_{rated} is a typical inductance value measured when the inductor is subjected to the rated current.
2. The rated current as listed is either the saturation current @ 25°C or the heating current depending on which value is lower.
3. The saturation current I_{sat} is the current which causes the inductance to drop by 10% at the stated ambient temperatures (-40°C, 25°C, 120°C). This current is determined by placing the component in the specified ambient environment and applying a short duration pulse current (to eliminate self-heating effects) to the component.
4. The heating current I_{dc} is the dc current which causes the temperature rise of the part to increase by approximately 40°C. This current is determined by mounting the component on a typical application PCB and applying the current to the device for 30 minutes.
5. **PG0035** and **PG0036** is used for the 25W~50W version of ZXCD1000 chipset while **PG0058** is used for the 100W version of ZXCD1000 and for the new digital audio amplifier chipset ZXCW8100.

**PG0035/36 TYPICAL INDUCTANCE VS. DC BIAS
At Different Ambient Temperature**

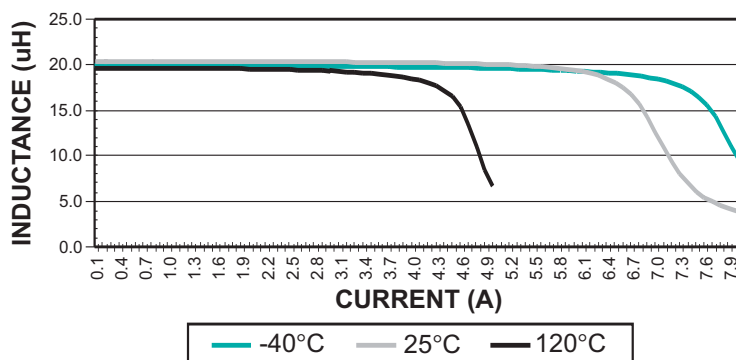

**PG0058 TYPICAL INDUCTANCE VS. DC BIAS
At Different Ambient Temperature**

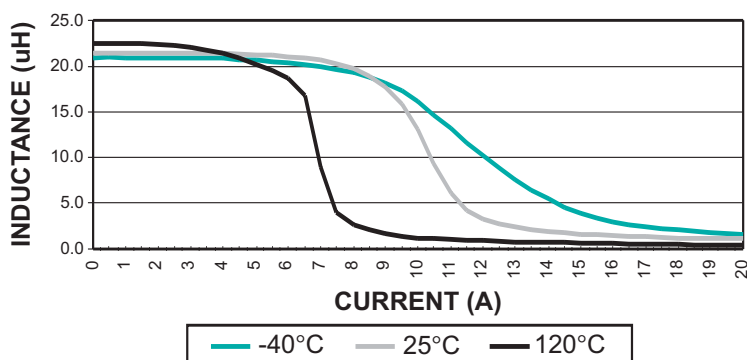

For More Information :

UNITED STATES (Worldwide)

12220 World Trade Drive
San Diego, CA 92128
U.S.A.
<http://www.pulseeng.com>
TEL: 858 674 8100
FAX: 858 674 8262

UNITED KINGDOM (Northern Europe)

1 & 2 Huxley Road
The Surrey Research Park
Guildford, Surrey GU2 5RE
United Kingdom
TEL: 44 1483 401700
FAX: 44 1483 401701

FRANCE (Southern Europe)

Zone Industrielle
F-39270
Orgelet
France
TEL: 33 3 84 35 04 04
FAX: 33 3 84 25 46 41

SINGAPORE (Southern Asia)

150 Kampong Ampat
#07-01/02
KA Centre
Singapore 368324
TEL: 65 6287 8998
FAX: 65 6280 0080

TAIWAN, R.O.C. (Northern Asia)

3F-4, No. 81, Sec. 1
HsinTai Wu Road
Hsi-Chih, Taipei Hsien
Taiwan, R.O.C.
Tel: 886 2 2698 0228
FAX: 886 2 2698 0948

HONG KONG (China/Hong Kong)

9/F, Phase 2, Tai Sang
Shatin Warehouse Centre
6 Wong Chuk Yeung Street
Fotan, Shatin, Hong Kong
TEL: 852 2788 6588
FAX: 852 2776 1055

DISTRIBUTOR

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.