



Key value for low noise level  
100 X Co value of calculated  
and PS quality

ECC88 working point  
EACH section


-Ug=1.5V cca.  
Va=90 V cca  
Ia=13.3mA cca.  
RL=4000 ohm

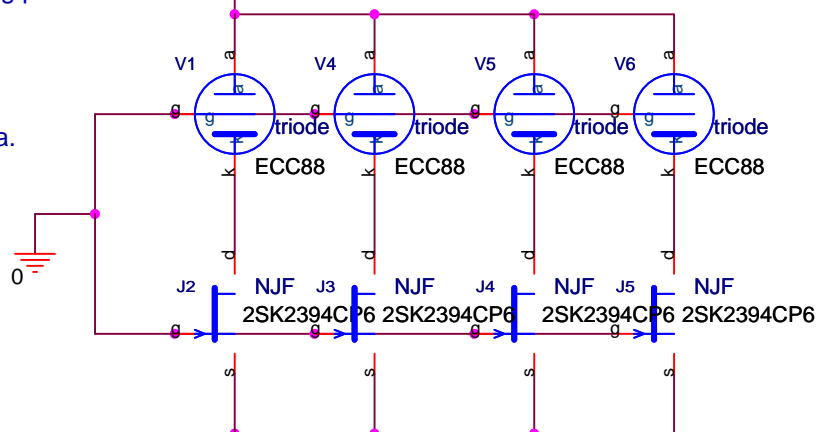


THD = 0.001198 %



THD = 0.00125 %


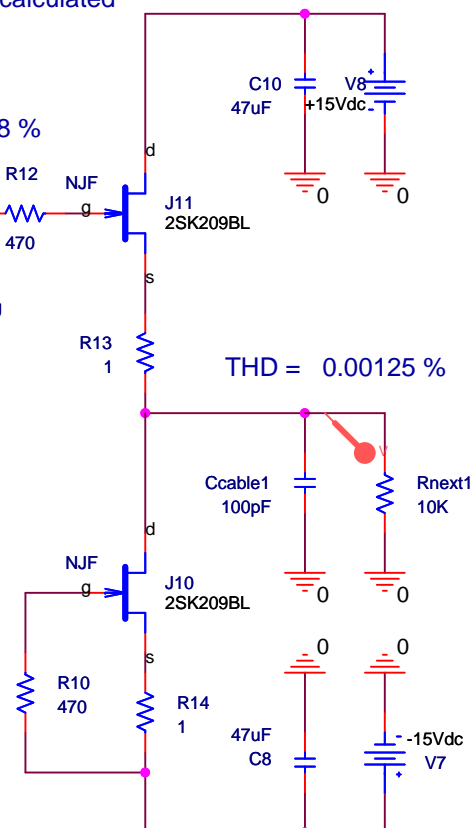


1 x TDA1541A +Iout



AC = 4mA  
DC = +2mA  
IAMPL = 2mA  
PHASE = 0  
FREQ = 1k  
IOFF = 2mA

Idac\_TDA1541A

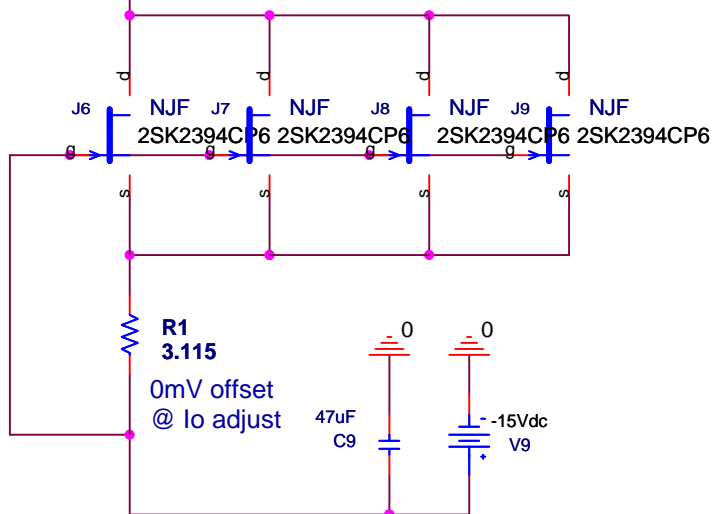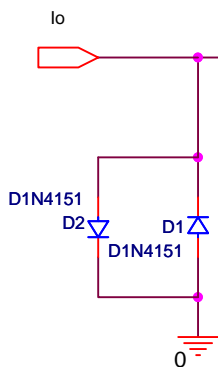

R1  
3.115  
0mV offset  
@ Io adjust

