

Technical Manual

MX-300

SPECIFICATIONS

ACOUSTIC & ELECTRICAL SPECIFICATIONS:

- * Nominal Impedance: 4 ohm
- * Recommended Amp Power: 10-75 W
- * Frequency Response: 55 Hz - 25 kHz (-6dB)
- * Sensitivity: 88 dB / 2,8V / 1 m
- * Crossover frequency: 3 KHZ

SYSTEM COMPONENTS:

- * Cabinet: CMX-300 (Not for sale)
- * Grille: GMX-300 (2404400)
- * Woofer: A0705A 130mm Woofer
25mm
- DC Resistance: 4,8 ohm

SYSTEM COMPONENTS: (cont'd)

- * Tweeter: A0701A
DC Resistance: 5,7 ohm
- * Crossover Network: NMX-300 (2704400)


PHYSICAL SPECIFICATIONS:

- * Enclosure Dimensions (H.W.D): 11,8x6,7x8,3 In. D
(300x170x210mm D)
- * Shipping Weight: 16,5 lbs. (7,5 kg.)


WARRANTY INFORMATION:

- * Refer to the Warranty Statement packed with each product

PACKAGE

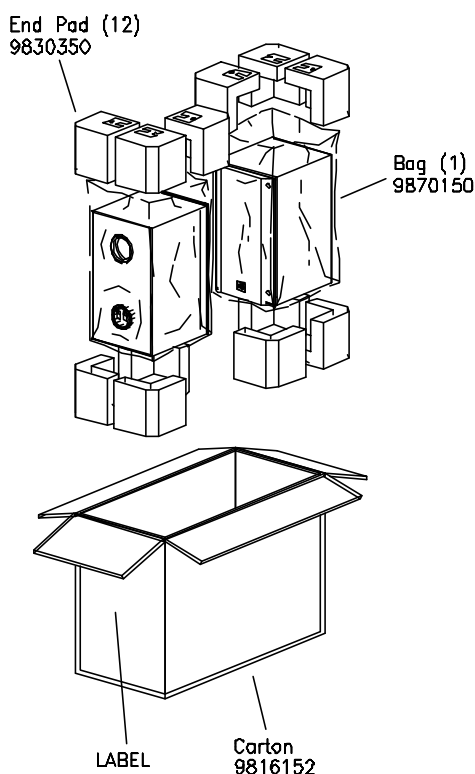

SCHEMATIC

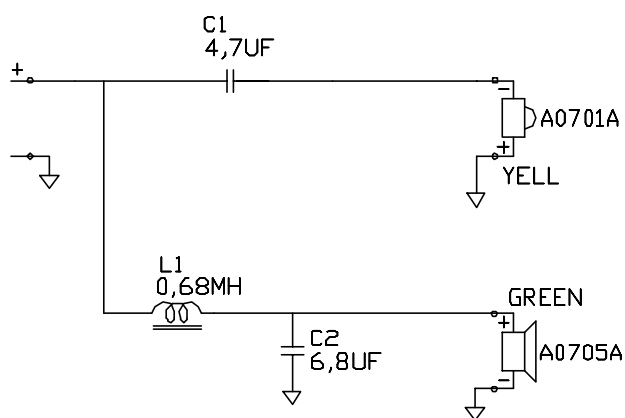

NOTE: CONE/DIAPHRAGM KIT NOT AVAILABLE.
DEFECTIVE DRIVER SHOULD BE REPLACED.

Valid from serial no. 01001
Rev. 16/11-1998

MX-300

COMPONENT EXPLODED VIEW

