


## SPEAKER MATCHING TRANSFORMER

- Audio isolation unit (ie...separate primary and secondary)
- Built in response to requests from the "Collins Collectors Association" to match "classic" high impedance audio outputs to modern low impedance speakers.
- Unit can also be used reverse connected to match "classic" high impedance speakers with newer equipment.
- Primary: 600 Ohm (with 6" wire leads)
- Secondary: 8 Ohm with 4 Ohm center tap (with solder lugs)
- Power: Rated at 12 watts
- Excellent frequency response: 30 Hz. - 20 Khz. (+/- 1 db @ Full Power - 1 Khz. Reference)
- Weight: 1 pound, 4 oz.
- Mounting: 2 hole bracket mount - on 2 13/16" mounting hole centers.

Part No.	Dimensions (Inches)				
	A	B	C	D	G Mtg. Hole
<b>119DA</b>	3.28	2.35	2.00	2.81	0.187

### Schematic & Hook Up Data

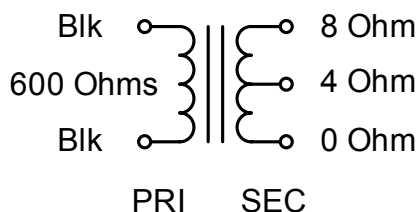

#### EUROPE

Basingstoke, UK 01256 812812

#### AUSTRALIA

Queenstown, Australia 61-8-8240-2244

[www.hammondmfg.com](http://www.hammondmfg.com)



#### CANADA

Guelph, Ontario (519) 822-2960  
St. Laurent, Quebec (514) 343-9010

#### USA

Cheektowaga, NY (716) 630-7030



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Hammond:](#)

[119DA](#) [124C](#)