
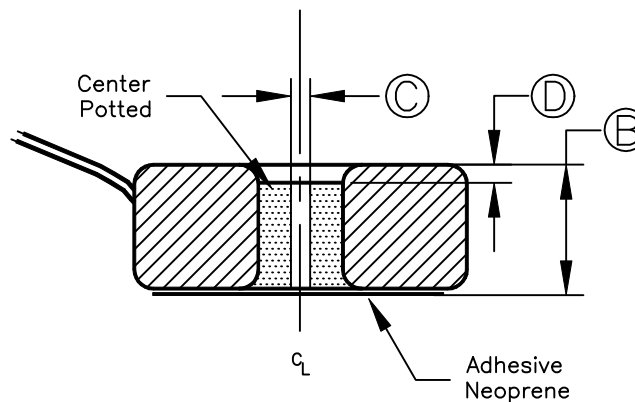
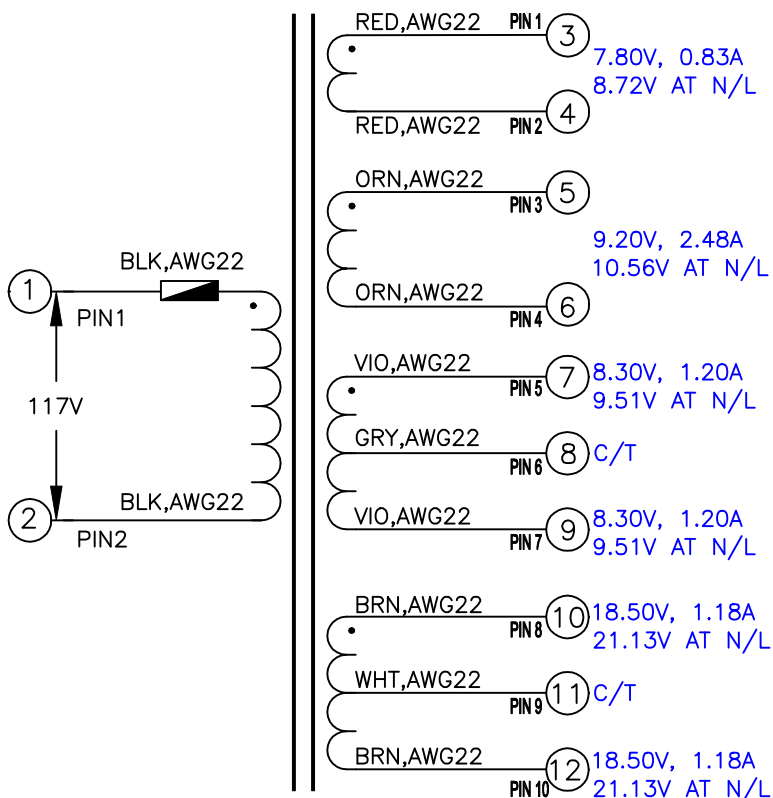


(PART NO: TSF 0674)

POWER:	VA	93
TEMPERATURE RISE:	°C	*43
EFFICIENCY:	%	*86
WEIGHT:	kg	*0.92
FREQUENCY:	Hz	60
OUTPUT VOLT TOLERANCE	%	±3

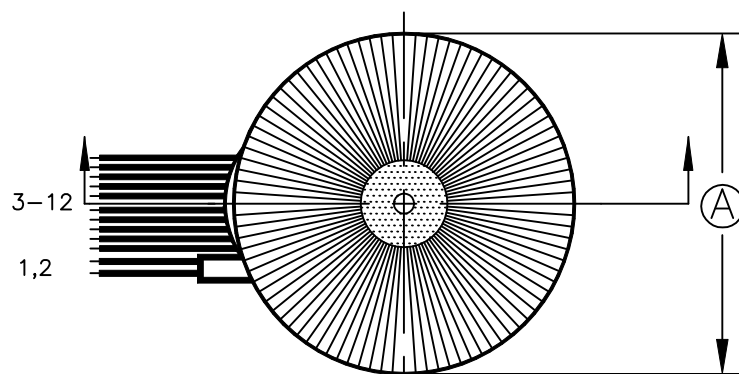

REF	Unit:	(nom)	(max)	TOLERANCE
A	mm	* 98	111	
B	mm	* 38	41	
C	inch	1/4		
D	mm	10		±3

LEADS	LENGTH ±10mm	TERMINATION
1,2	330	Molex 39-00-0038 pin in Molex 39-01-2020 Housing
3-12	420	Molex 39-00-0038 pin in Molex 39-01-2100 Housing

LABEL INFO:

PLITRON MANUFACTURING INC.
7695-B1-04 DATE CODE F:60
INPUT: 117VAC BLK/BLK
P/N TSF 0674

NOTES:

1. UL recognised to UL506, UL1411, CSA 22.2 No66-1988 Class A(105°C) Insulation System.
2. All stranded leads are TR64/UL1007 type wire.
3. Thermal resetting switch 130°C N.C. in series with primary.

* Calculated value

V=VAC rms A=I rms

C/T= Center Tap

N/L= No load



This document is the property of Plitron Manufacturing Inc. It is not to be copied or transmitted or used as the basis for manufacturing of apparatus without written permission.
Copyright Plitron Manufacturing Inc.

TOROIDAL POWER TRANSFORMER

DESIGN BY: B.GLADSTONE
DRAWN BY: C.YU
CHECKED BY:
APPROVED BY:

DATE: 04/04/2001
DATE: 04/13/2005
DATE:
DATE:

DWG NO. 7695-B1-04

SCALE N/A SHEET 1 OF 1