

Sequence Report



Summary

Signal Path1

Signal Path Setup	✓ PASSED
Level and Gain	✓ PASSED
THD+N	✓ PASSED
Frequency Response	✓ PASSED
Signal to Noise Ratio	✓ PASSED
Crosstalk, One Channel Undriven	✓ PASSED
Interchannel Phase	✓ PASSED
Stepped Frequency Sweep	✓ PASSED

Sequence Result:

Sequence Result: ✓ PASSED

Sequence Report



Signal Path1 : Signal Path Setup

Output Connector:	Analog Unbalanced
Channels:	2
Source Impedance:	50 ohm
Output EQ:	None
Input Connector:	Analog Unbalanced
Channels:	2
Termination:	100 kohm
Input Bandwidth:	AC (<10 Hz) - AES17 (20 kHz)
Device Delay:	0.000 s
Input EQ:	None

• References

dBr G:	1.098 Vrms
dBm (Output Power):	600.0 ohm
W(watts) (Output Power):	8.000 ohm
Shared Frequency Reference:	1.00000 kHz
dBrA:	1.000 Vrms
dBrB:	1.000 Vrms
dBrA Offset:	0.000 dB
dBrB Offset:	0.000 dB
dB SPL1:	10.00 mVrms
dB SPL2:	10.00 mVrms
dB SPL1 Calibrator Level:	94.000 dB SPL
dB SPL2 Calibrator Level:	94.000 dB SPL
dBm (Input Power):	600.0 ohm
W(watts) (Input Power):	8.000 ohm

• DCX

DCX is not detected.

Sequence Report



Signal Path1 : Verify Connections

Waveform: Sine

Generator Level: 1.098 Vrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (3/15/2017 2:47:18.678 PM)

Ch1 10.95 Vrms

Ch2 10.94 Vrms

Gain (3/15/2017 2:47:18.678 PM)

Ch1 19.979 dB

Ch2 19.967 dB

THD+N Ratio (3/15/2017 2:47:18.678 PM)

Ch1 0.008039 %

Ch2 0.007408 %

Frequency (3/15/2017 2:47:18.678 PM)

Ch1 1.00000 kHz

Ch2 1.00000 kHz

Signal Path1 : Level and Gain

Waveform: Sine

Generator Level: 1.098 Vrms

DC Offset: 0.000 V

Frequency: 1.00000 kHz

RMS Level (3/15/2017 2:47:20.534 PM)

Ch1 10.95 Vrms

Ch2 10.94 Vrms

Gain (3/15/2017 2:47:20.534 PM)

Ch1 19.979 dB

Ch2 19.967 dB

Peak Level (3/15/2017 2:47:20.534 PM)

Ch1 15.49 V

Ch2 15.47 V

Sequence Report



Signal Path1 : THD+N

Waveform: Sine
 Generator Level: 1.098 Vrms
 DC Offset: 0.000 V
 Frequency: 1.00000 kHz
 Low-pass Filter: 20 kHz
 Weighting Filter: Signal Path
 High-pass Filter: 20 Hz
 Notch Tuning Mode: Measured Frequency

THD+N Ratio (3/15/2017 2:47:22.874 PM)

Ch1 0.008011 %

Ch2 0.007422 %

THD+N Level (3/15/2017 2:47:22.874 PM)

Ch1 877.5 uVrms

Ch2 811.9 uVrms

THD Ratio (3/15/2017 2:47:22.874 PM)

Ch1 0.007972 %

Ch2 0.007365 %

THD Level (3/15/2017 2:47:22.874 PM)

Ch1 873.7 uVrms

Ch2 806.1 uVrms

Noise Ratio (3/15/2017 2:47:22.874 PM)

Ch1 0.000988 %

Ch2 0.000999 %

Noise Level (3/15/2017 2:47:22.874 PM)

Ch1 108.2 uVrms

Ch2 109.3 uVrms

Distortion Product Ratio (3/15/2017 2:47:22.874 PM)

Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	100.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.00
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch2	100.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00

Distortion Product Ratio Parameters

Frequency Unit: Hz

Ratio Unit: %

Distortion Product Level (3/15/2017 2:47:22.874 PM)

Sequence Report



Channel	F	H2	H3	H4	H5	H6	H7	H8	H9	H10
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch1	10.96	329.0 u	563.7 u	21.81 u	488.5 u	45.06 u	28.44 u	31.41 u	83.60 u	7.527 u
	1.000k	2.000k	3.000k	4.000k	5.000k	6.000k	7.000k	8.000k	9.000k	10.00k
Ch2	10.94	35.75 u	474.0 u	34.77 u	555.2 u	53.68 u	32.51 u	74.50 u	77.02 u	16.78 u

Distortion Product Level Parameters

Frequency Unit: Hz

Level Unit: Vrms

Sequence Report



Signal Path1 : Frequency Response

Generator Level: 1.098 Vrms

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 Hz

Stop Frequency: 20.0000 kHz

Sweep: 350.0 ms


Pre-Sweep: 100.0 ms

Extend Acquisition By: 50.00 ms

Secondary Source: None

Measured 1 3/15/2017 2:47:24 PM

RMS Level (3/15/2017 2:47:24.808 PM)

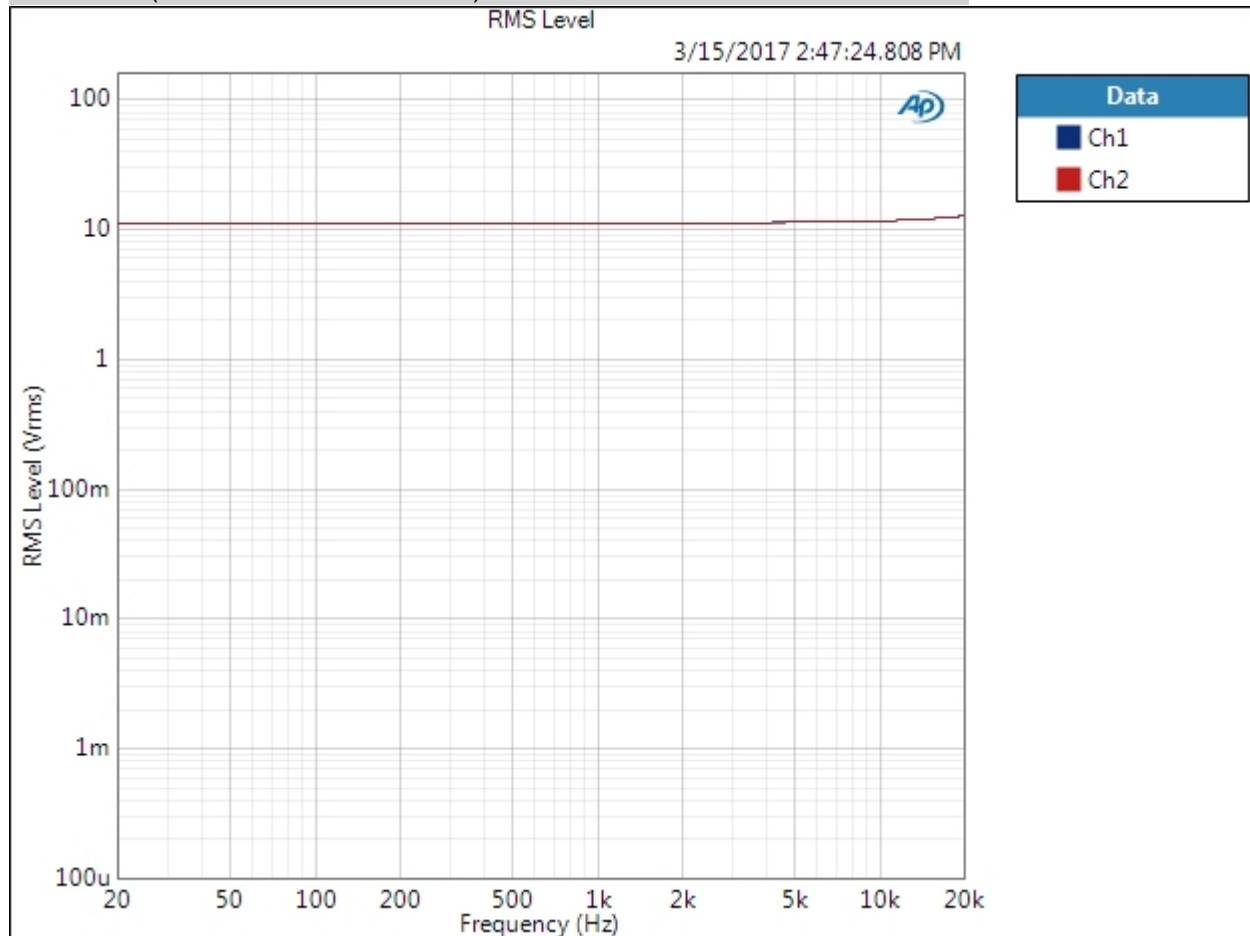


Result: PASSED

Gain (3/15/2017 2:47:24.808 PM)

3/15/2017 2:47 PM

Page 6 of 11


Sequence Report

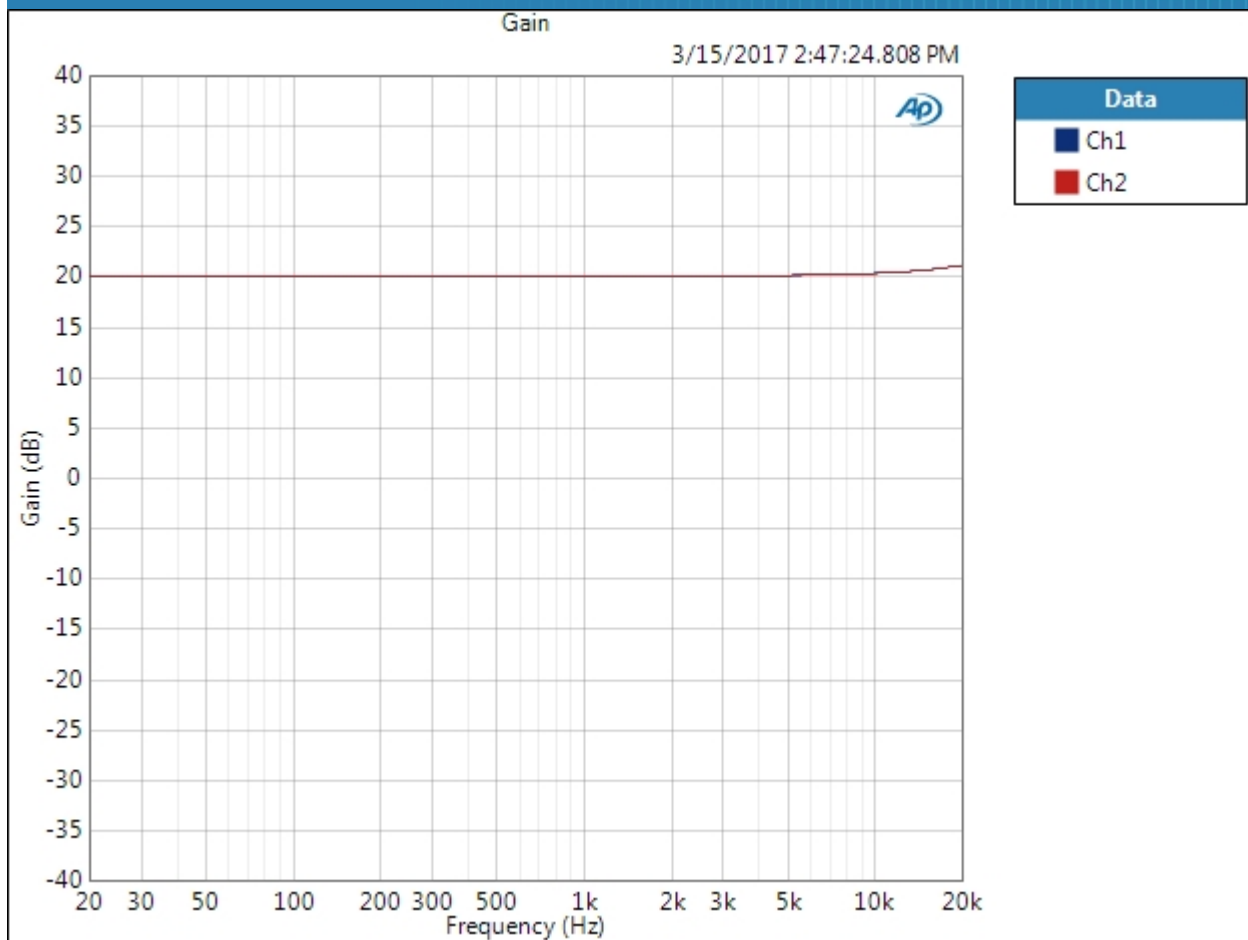

Result: PASSED

Relative Level (1.00000 kHz) (3/15/2017 2:47:24.808 PM)

Sequence Report

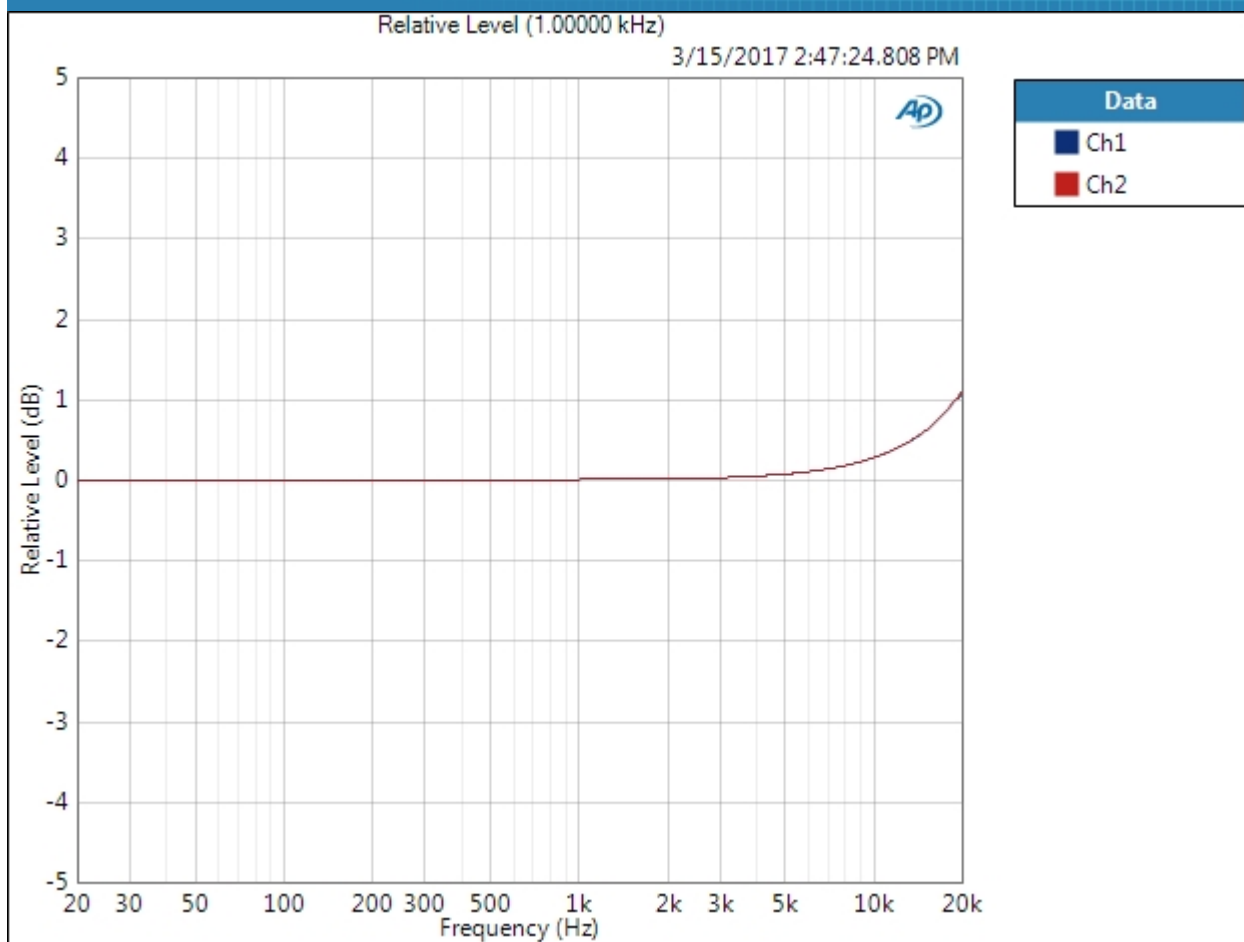

Relative Level (1.00000 kHz) Parameters

Mode: Normalized at Reference

Ref Frequency: 1.00000 kHz

Result: PASSED

Deviation (20.0000 Hz - 20.0000 kHz) (3/15/2017 2:47:24.808 PM)

Ch1 ± 0.574 dB

Ch2 ± 0.577 dB

Deviation (20.0000 Hz - 20.0000 kHz) Parameters

Min: 20.0000 Hz

Max: 20.0000 kHz

Sequence Report



Signal Path1 : Signal to Noise Ratio

Waveform: Sine
Generator Level: 1.098 Vrms
DC Offset: 0.000 V
Frequency: 1.00000 kHz
Low-pass Filter: 20 kHz
Weighting Filter: Signal Path
High-pass Filter: 20 Hz

Signal to Noise Ratio (3/15/2017 2:47:26.696 PM)

Ch1 100.946 dB
Ch2 100.845 dB

Signal Path1 : Crosstalk, One Channel Undriven

Waveform: Sine
Generator Level: 1.098 Vrms
DC Offset: 0.000 V
Frequency: 1.00000 kHz

Crosstalk (3/15/2017 2:47:28.459 PM)

Ch1 -84.953 dB
Ch2 -85.931 dB

Signal Path1 : Interchannel Phase

Waveform: Sine
Generator Level: 1.098 Vrms
DC Offset: 0.000 V
Frequency: 1.00000 kHz
Reference Channel: Ch1
Meter Range: -90 -> 270 deg

Phase (3/15/2017 2:47:30.190 PM)

Ch1 ---- deg
Ch2 -0.009 deg

Sequence Report



Signal Path1 : Stepped Frequency Sweep

Generator Level: 1.098 Vrms

DC Offset: 0.000 V

EQ: None

Start Frequency: 20.0000 kHz

Stop Frequency: 20.0000 Hz

Step Type: Logarithmic


Number of Points: 31

Weighting Filter: Signal Path

Phase Ref Channel: Ch1

Measured 1 3/15/2017 2:47:47 PM

Gain (3/15/2017 2:47:47.164 PM)

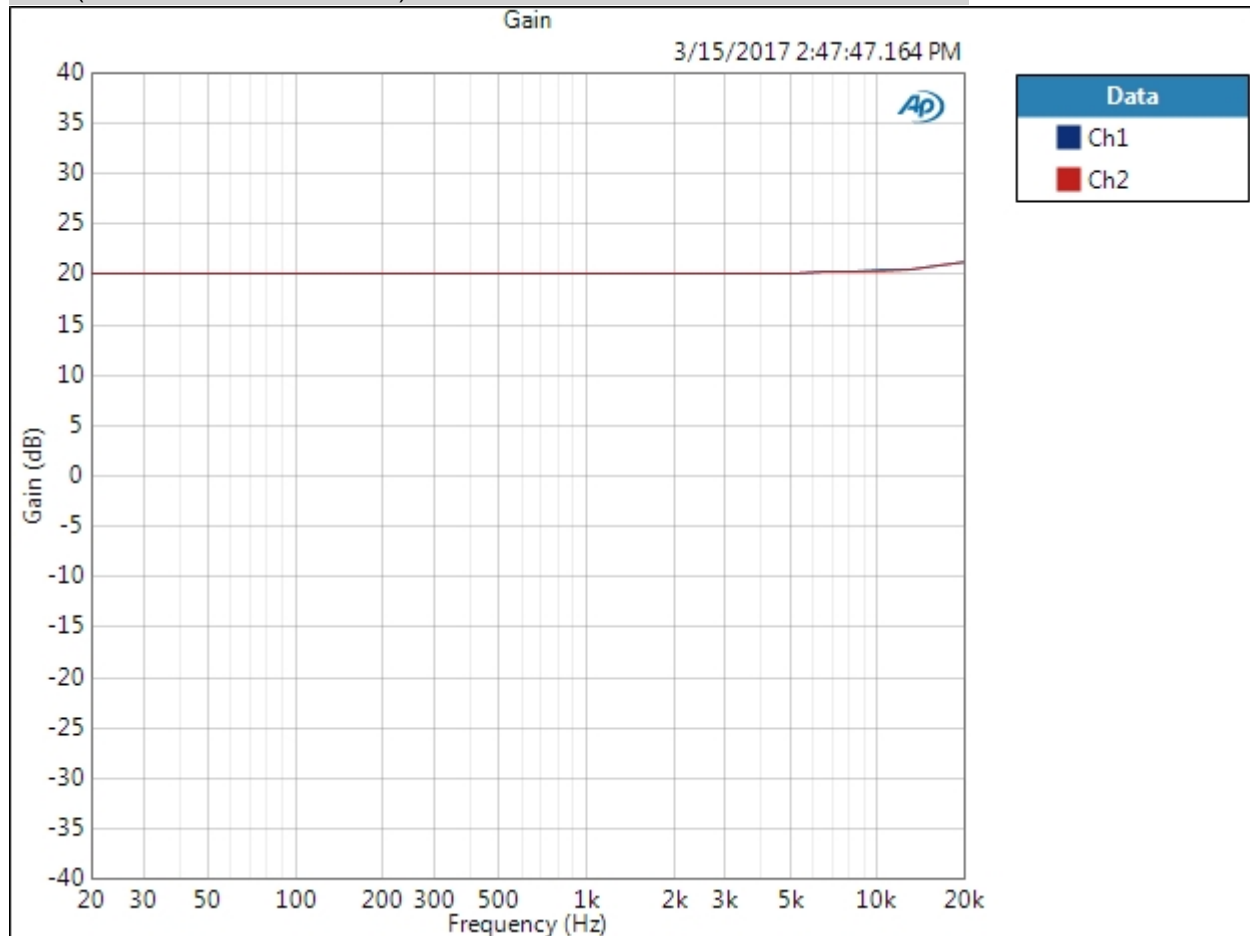


Result: PASSED

THD+N Ratio (3/15/2017 2:47:47.164 PM)

3/15/2017 2:47 PM

Sequence Report

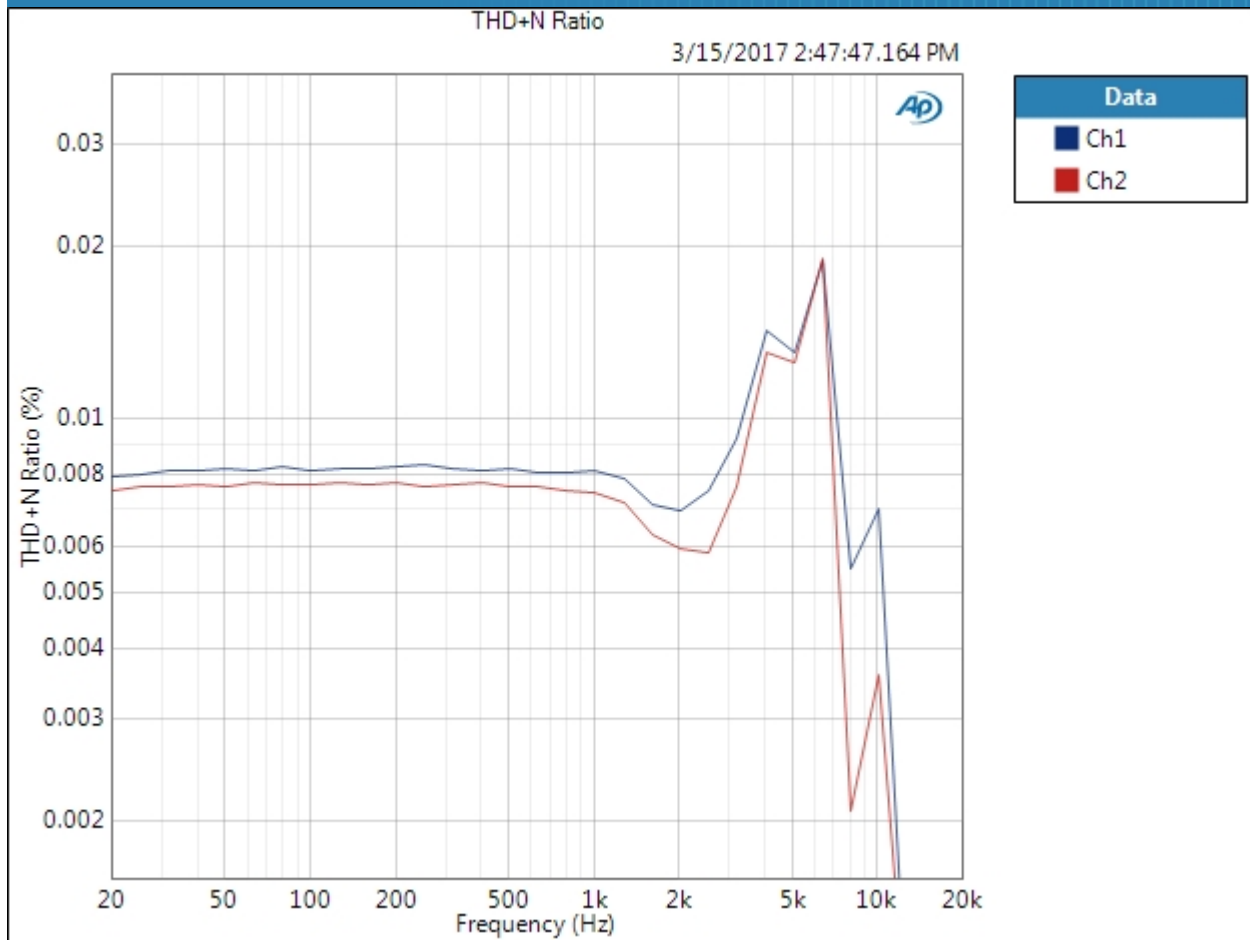

Result: PASSED