

SUBWOOFER 21SW4000

Professional Low Frequency Driver



Key Features

- Large 6" Voice Coil
- 2,000 Watts Continuous Power Handling
- 98 dB Sensitivity
- Forced Air Cooling Technology

GENERAL SPECIFICATIONS



Nominal Diameter	21/533	in/mm
Nominal Impedance	8	ohms
RMS Power	2,000	Watts
Musical Program Power	4,000	Watts
Sensitivity	98	dB
Frequency Response	33-1,000	Hz
Voice Coil Diameter	6/152	in/mm
Voice Coil Wire Material	Copper	
Voice Coil Former Material	Kapton®	

THIELE-SMALL PARAMETERS


Equivalent Volume	Vas	207.6	L
Excursion	Xmax	16	mm
Free Air Resonance	Fs	32.3	Hz
Mechanical Factor	Qms	13.918	
Electrical Factor	Qes	0.279	
Total Factor	Qts	0.274	
Cone Area	Sd	1771	Cm ²
Mechanical Mass	Mms	520.9	g
BL Factor	BL	40.83	Tm
DC Resistance	Re	4.4	ohms

MOUNTING AND WEIGHT INFORMATION

Overall Diameter	21.4/545	in/mm
Front Mount Baffle Cutout	19.3/492	in/mm
Mounting Depth	8/204.7	in/mm
Overall Depth	8.75/222	in/mm
Net Weight	65/29.4	Lbs/Kgs
Shipping Weight	74/33.5	Lbs/Kgs
Carton Dimensions	25 x 25 x 12 / 635 x 635 x 304	in/mm

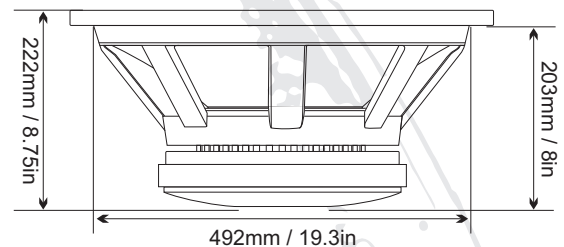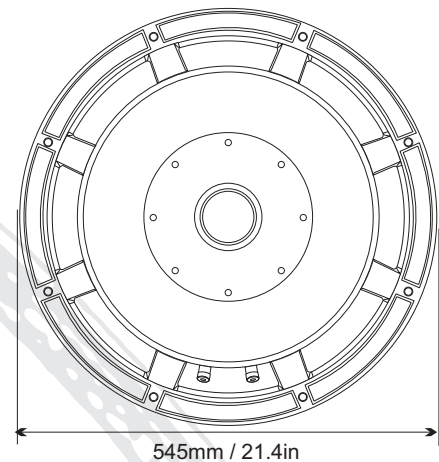

Frequency Response Measured at 2.83v/1m

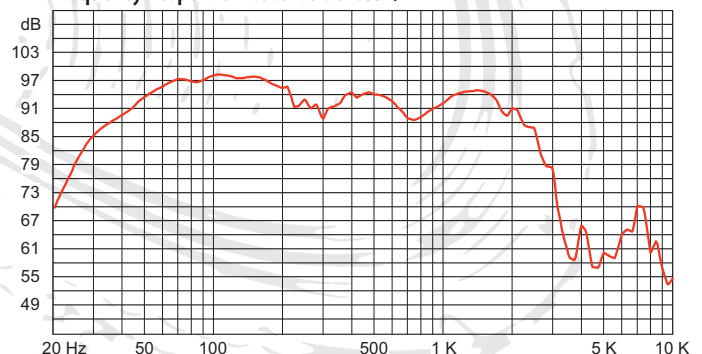

PRV AUDIO USA (USA and Export)
MIAMI, FL
support@prvaudio.com
http://www.prvaudio.com

PRV AUDIO BRAZIL (Brazilian Sales Only)
SAO LEOPOLDO, RS
vendas@prvaudio.com.br
http://prvaudio.com.br