


# AUDIO AMP. ASSEMBLY (714-0003-00)

## PRINTED CIRCUIT BOARD

\*Printed circuit board as seen from the reverse side.

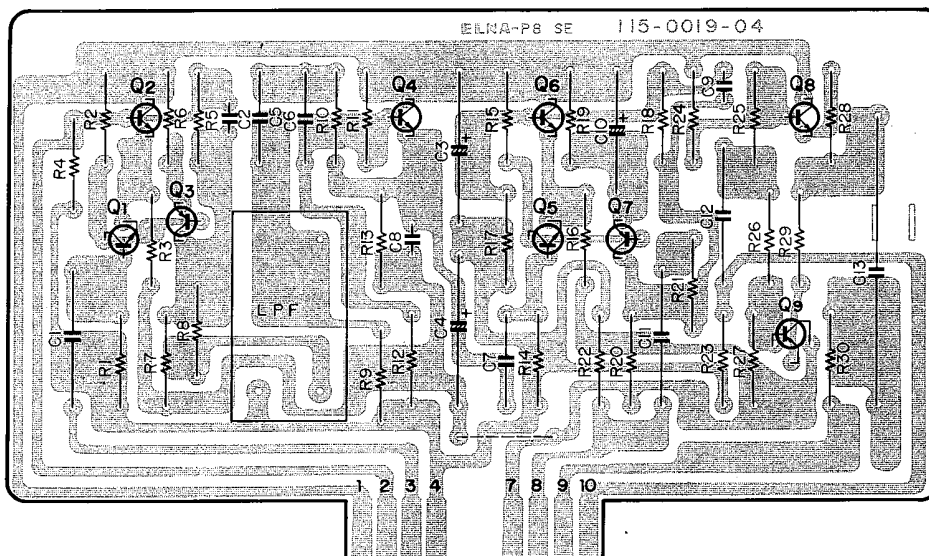

## PARTS LIST

Ref. No.	Description	Part No.	Remarks
Q3, 7, 9	Low Pass Filter	520-5001-00	
Q1, 2, 4, 5, 6, 8	Transistor PNP	2SA776 Y or GR	
	Transistor NPN	2SC1416A GR or BL	
R30	Carbon Film Resistor 47 $\pm 5\%$ 1/2W	RD142HA470J	
R28, 29	Carbon Film Resistor 100 $\pm 5\%$ 1/2W	RD142HA101J	
R6, 19, 21	Carbon Film Resistor 220 $\pm 5\%$ 1/2W	RD142HA221J	
R8	Carbon Film Resistor 2.2k $\pm 5\%$ 1/2W	RD142HA222J	
R7, 20	Carbon Film Resistor 2.7k $\pm 5\%$ 1/2W	RD142HA272J	
R9, 13	Carbon Film Resistor 3.3k $\pm 5\%$ 1/2W	RD142HA332J	
R23	Carbon Film Resistor 10k $\pm 5\%$ 1/2W	RD142HA103J	
R25, 26	Carbon Film Resistor 16k $\pm 5\%$ 1/2W	RD142HA163J	
R10	Carbon Film Resistor 22k $\pm 5\%$ 1/2W	RD142HA223J	
R2, 15	Carbon Film Resistor 33k $\pm 5\%$ 1/2W	RD142HA333J	
R4, 17	Carbon Film Resistor 36k $\pm 5\%$ 1/2W	RD142HA363J	
R14	Carbon Film Resistor 56k $\pm 5\%$ 1/2W	RD142HA563J	
R5, 18, 22	Carbon Film Resistor 100k $\pm 5\%$ 1/2W	RD142HA104J	
R24, 27	Carbon Film Resistor 330k $\pm 5\%$ 1/2W	RD142HA334J	
R3, 16	Carbon Film Resistor 82k $\pm 5\%$ 1/2W	RD142HA823J	
R1	Carbon Film Resistor 110k $\pm 5\%$ 1/2W	RD142HA114J	
R12	Carbon Film Resistor 160k $\pm 5\%$ 1/2W	RD142HA164J	
R11	Carbon Film Resistor 270k $\pm 5\%$ 1/2W	RD142HA274J	
C2, 9	Ceramic capacitor 2pF $\pm 0.25$ pF 50WV	CC45SL1H020C	
C10	Electrolytic capacitor 220 $\mu$ F 10WV	CE02W1A221	
C3, 4	Electrolytic capacitor 100 $\mu$ F 25WV	CE02W1E101	
C11	Bipolar Electrolytic Capacitor 4.7 $\mu$ F 50WV	CE02W1H4R7(BP)	
C8	Mica Capacitor 470pF $\pm 5\%$ 100WV	CM93D2A471J	
C5, 6, 7	Mylar Film Capacitor 0.22 $\mu$ F $\pm 5\%$ 50WV	CQ93M1H224J	
C13	Metallized Film Capacitor 4.7 $\mu$ F 250WV	CQ91M2E475(M)	
C1, 12	Metallized Film Capacitor 0.47 $\mu$ F 250WV	CQ91M2E474(M)	