


2. BLOCK DIAGRAM

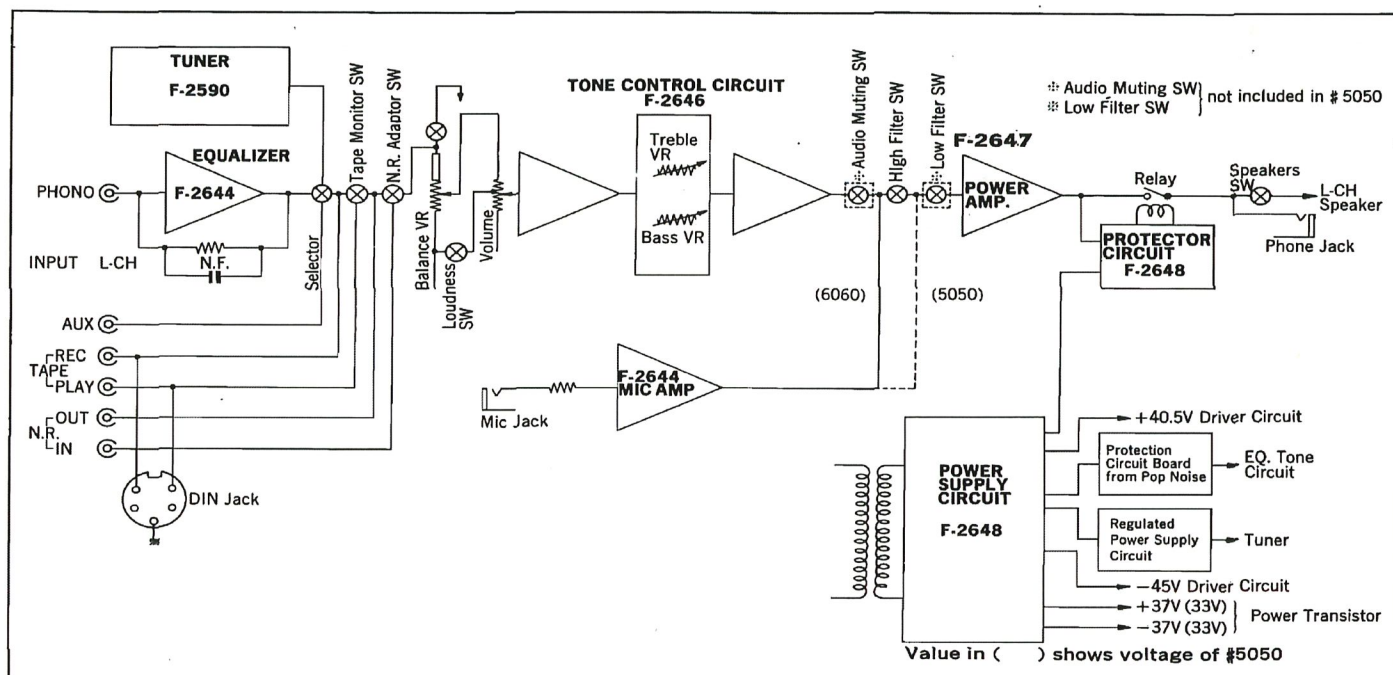

3. ADJUSTMENTS

3-1. Adjustment of Bias Current (See Fig. 3-1 & 3-2)

STEP	SUBJECT	EQUIPMENT	MEASURE OUTPUT	ADJUST	ADJUST FOR
1	Bias Current L-CH	DC Volt Meter	R05, R07 F-2648	VR01 F-2647	<u>15mV</u> $\pm 1mV$
2	Bias Current R-CH	DC Volt Meter	R06, R08 F-2648	VR02 F-2647	<u>15mV</u> $\pm 1mV$

Fig. 3-1

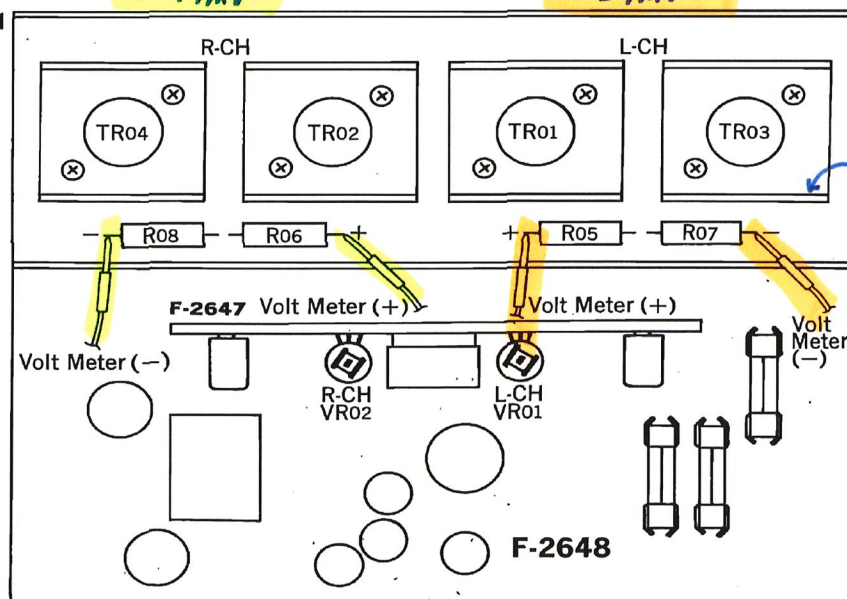


Fig. 3-2

