


Note:
Front and back panel are removable
-and the same size-for driver and
stuffing access.
Round port (terminus) preferred.

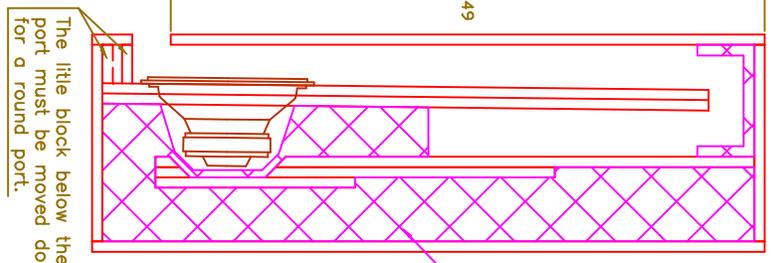


Derived from T-TQWT by bjorno for permco:
here: Single driver TB W8Q-1071D

- Duct height @:
- S1=5.221"
 - S2=3.629
 - S3=2.797
 - S4=2.696
 - L12=55.610
 - L23=74.410
 - L34=7

Stuffing:
Fiberfill @ .5lbs/ft²
Lining in the top 180°
turn, and around the
back of the woofer.
Fill volume ~ 1.34ft³
Fiberfill weight ~ .7lbs.
Density should be highest
around S1, and taper off
towards the driver (S2)
area.

The little block below the
port must be moved down
for a round port.

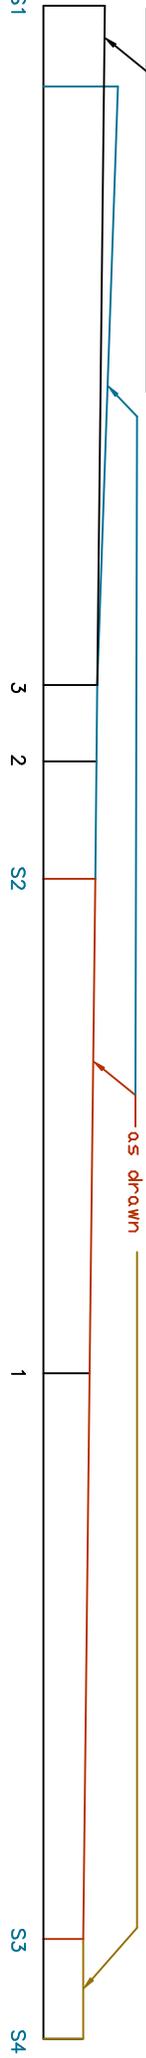

as drawn