

IGBT-Wechselrichter / IGBT-inverter

Höchstzulässige Werte / maximum rated values

| | | | | |
|--------------------------------------------------------------------------|----------------------------------------------------------|-----------------------------|--------------|--------|
| Kollektor-Emitter-Sperrspannung collector-emitter voltage | $T_{vj} = 25^{\circ}\text{C}$ | V_{CES} | 1200 | V |
| Kollektor-Dauergleichstrom DC-collector current | $T_C = 80^{\circ}\text{C}$ $T_C = 25^{\circ}\text{C}$ | $I_{C\text{ nom}}$ I_C | 1200 1900 | A A |
| Periodischer Kollektor Spitzenstrom repetitive peak collector current | $t_p = 1\text{ ms}, T_C = 80^{\circ}\text{C}$ | I_{CRM} | 2400 | A |
| Gesamt-Verlustleistung total power dissipation | $T_C = 25^{\circ}\text{C}$ | P_{tot} | 7,80 | kW |
| Gate-Emitter-Spitzenspannung gate-emitter peak voltage | | V_{GES} | +/-20 | V |

Charakteristische Werte / characteristic values

| | | | min. | typ. | max. | |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------|------|--------------|--------------|--------------------------------|
| Kollektor-Emitter Sättigungsspannung collector-emitter saturation voltage | $I_C = 1200\text{ A}, V_{GE} = 15\text{ V}, T_{vj} = 25^{\circ}\text{C}$ $I_C = 1200\text{ A}, V_{GE} = 15\text{ V}, T_{vj} = 125^{\circ}\text{C}$ | $V_{CE\text{ sat}}$ | | 2,10 2,40 | 2,60 2,90 | V V |
| Gate-Schwellenspannung gate threshold voltage | $I_C = 48,0\text{ mA}, V_{CE} = V_{GE}, T_{vj} = 25^{\circ}\text{C}$ | $V_{GE\text{ th}}$ | 4,5 | 5,5 | 6,5 | V |
| Gateladung gate charge | $V_{GE} = -15\text{ V} \dots +15\text{ V}$ | Q_G | | 13,0 | | μC |
| Interner Gatewiderstand internal gate resistor | $T_{vj} = 25^{\circ}\text{C}$ | $R_{G\text{ int}}$ | | 1,3 | | Ω |
| Eingangskapazität input capacitance | $f = 1\text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}$ | C_{ies} | | 90,0 | | nF |
| Rückwirkungskapazität reverse transfer capacitance | $f = 1\text{ MHz}, T_{vj} = 25^{\circ}\text{C}, V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}$ | C_{res} | | 7,00 | | nF |
| Kollektor-Emitter Reststrom collector-emitter cut-off current | $V_{CE} = 1200\text{ V}, V_{GE} = 0\text{ V}, T_{vj} = 25^{\circ}\text{C}$ | I_{CES} | | | 5,0 | mA |
| Gate-Emitter Reststrom gate-emitter leakage current | $V_{CE} = 0\text{ V}, V_{GE} = 20\text{ V}, T_{vj} = 25^{\circ}\text{C}$ | I_{GES} | | | 400 | nA |
| Einschaltverzögerungszeit (ind. Last) turn-on delay time (inductive load) | $I_C = 1200\text{ A}, V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}, R_{Gon} = 0,82\ \Omega, T_{vj} = 25^{\circ}\text{C}$ $V_{GE} = \pm 15\text{ V}, R_{Gon} = 0,82\ \Omega, T_{vj} = 125^{\circ}\text{C}$ | $t_{d\text{ on}}$ | | 0,54 0,57 | | μs μs |
| Anstiegszeit (induktive Last) rise time (inductive load) | $I_C = 1200\text{ A}, V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}, R_{Gon} = 0,82\ \Omega, T_{vj} = 25^{\circ}\text{C}$ $V_{GE} = \pm 15\text{ V}, R_{Gon} = 0,82\ \Omega, T_{vj} = 125^{\circ}\text{C}$ | t_r | | 0,18 0,18 | | μs μs |
| Abschaltverzögerungszeit (ind. Last) turn-off delay time (inductive load) | $I_C = 1200\text{ A}, V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}, R_{Goff} = 0,82\ \Omega, T_{vj} = 25^{\circ}\text{C}$ $V_{GE} = \pm 15\text{ V}, R_{Goff} = 0,82\ \Omega, T_{vj} = 125^{\circ}\text{C}$ | $t_{d\text{ off}}$ | | 1,05 1,15 | | μs μs |
| Fallzeit (induktive Last) fall time (inductive load) | $I_C = 1200\text{ A}, V_{CE} = 600\text{ V}$ $V_{GE} = \pm 15\text{ V}, R_{Goff} = 0,82\ \Omega, T_{vj} = 25^{\circ}\text{C}$ $V_{GE} = \pm 15\text{ V}, R_{Goff} = 0,82\ \Omega, T_{vj} = 125^{\circ}\text{C}$ | t_f | | 0,13 0,14 | | μs μs |
| Einschaltverlustenergie pro Puls turn-on energy loss per pulse | $I_C = 1200\text{ A}, V_{CE} = 600\text{ V}, L_S = 70\text{ nH}$ $V_{GE} = \pm 15\text{ V}, R_{Gon} = 0,82\ \Omega, T_{vj} = 25^{\circ}\text{C}$ $V_{GE} = \pm 15\text{ V}, R_{Gon} = 0,82\ \Omega, T_{vj} = 125^{\circ}\text{C}$ | E_{on} | | 165 | | mJ mJ |
| Abschaltverlustenergie pro Puls turn-off energy loss per pulse | $I_C = 1200\text{ A}, V_{CE} = 600\text{ V}, L_S = 70\text{ nH}$ $V_{GE} = \pm 15\text{ V}, R_{Goff} = 0,82\ \Omega, T_{vj} = 25^{\circ}\text{C}$ $V_{GE} = \pm 15\text{ V}, R_{Goff} = 0,82\ \Omega, T_{vj} = 125^{\circ}\text{C}$ | E_{off} | | 195 | | mJ mJ |
| Kurzschlußverhalten SC data | $t_p \leq 10\ \mu\text{s}, V_{GE} \leq 15\text{ V}$ $T_{vj} \leq 125^{\circ}\text{C}, V_{CC} = 900\text{ V}, V_{CE\text{ max}} = V_{CES} - L_{s\text{ CE}} \cdot di/dt$ | I_{SC} | | 9000 | | A |
| Innerer Wärmewiderstand thermal resistance, junction to case | pro IGBT per IGBT | $R_{th\text{ JC}}$ | | | 16,0 | K/kW |

| | |
|------------------------------|--------------------------------|
| prepared by: Mark Münzer | date of publication: 2004-2-11 |
| approved by: Christoph Lübke | revision: 3.0 |

Diode-Wechselrichter / diode-inverter

Höchstzulässige Werte / maximum rated values

| | | | | |
|---------------------------------------------------------------------|----------------------------------------------------------------------|-----------|------|-----------------------|
| Periodische Spitzensperrspannung repetitive peak reverse voltage | $T_{vj} = 25^{\circ}\text{C}$ | V_{RRM} | 1200 | V |
| Dauergleichstrom DC forward current | | I_F | 1200 | A |
| Periodischer Spitzenstrom repetitive peak forward current | $t_p = 1\text{ ms}$ | I_{FRM} | 2400 | A |
| Grenzlastintegral I^2t - value | $V_R = 0\text{ V}, t_p = 10\text{ ms}, T_{vj} = 125^{\circ}\text{C}$ | I^2t | 300 | kA^2s |

Charakteristische Werte / characteristic values

| | | | min. | typ. | max. | |
|-----------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|------|--------------|--------------|--------------------------------|
| Durchlassspannung forward voltage | $I_F = 1200\text{ A}, V_{GE} = 0\text{ V}, T_{vj} = 25^{\circ}\text{C}$ $I_F = 1200\text{ A}, V_{GE} = 0\text{ V}, T_{vj} = 125^{\circ}\text{C}$ | V_F | | 1,80 1,70 | 2,30 2,20 | V V |
| Rückstromspitze peak reverse recovery current | $I_F = 1200\text{ A}, -di_F/dt = 6800\text{ A}/\mu\text{s}$ $V_R = 600\text{ V}, V_{GE} = -15\text{ V}, T_{vj} = 25^{\circ}\text{C}$ $V_R = 600\text{ V}, V_{GE} = -15\text{ V}, T_{vj} = 125^{\circ}\text{C}$ | I_{RM} | | 740 980 | | A A |
| Sperrverzögerungsladung recovered charge | $I_F = 1200\text{ A}, -di_F/dt = 6800\text{ A}/\mu\text{s}$ $V_R = 600\text{ V}, V_{GE} = -15\text{ V}, T_{vj} = 25^{\circ}\text{C}$ $V_R = 600\text{ V}, V_{GE} = -15\text{ V}, T_{vj} = 125^{\circ}\text{C}$ | Q_r | | 105 215 | | μC μC |
| Abschaltenergie pro Puls reverse recovery energy | $I_F = 1200\text{ A}, -di_F/dt = 6800\text{ A}/\mu\text{s}$ $V_R = 600\text{ V}, V_{GE} = -15\text{ V}, T_{vj} = 25^{\circ}\text{C}$ $V_R = 600\text{ V}, V_{GE} = -15\text{ V}, T_{vj} = 125^{\circ}\text{C}$ | E_{rec} | | 45,0 80,0 | | mJ mJ |
| Innerer Wärmewiderstand thermal resistance, junction to case | pro Diode per diode | R_{thJC} | | | 32,0 | K/kW |

| | |
|------------------------------|--------------------------------|
| prepared by: Mark Münzer | date of publication: 2004-2-11 |
| approved by: Christoph Lübke | revision: 3.0 |

Modul / module


| | | | | | | |
|----------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|----------------------|--------------------------------|--------|-----------|----------|
| Isolations-Prüfspannung insulation test voltage | RMS, f = 50 Hz, t = 1 min | V _{ISO} | 2,5 | | | kV |
| Material für innere Isolation material for internal insulation | | | Al ₂ O ₃ | | | |
| Kriechstrecke creepage distance | Kontakt - Kühlkörper / terminal to heatsink Kontakt - Kontakt / terminal to terminal | | 17,0 | | | mm |
| Luftstrecke clearance distance | Kontakt - Kühlkörper / terminal to heatsink Kontakt - Kontakt / terminal to terminal | | 10,0 | | | mm |
| Vergleichszahl der Kriechwegbildung comparative tracking index | | CTI | > 275 | | | |
| | | | min. | typ. | max. | |
| Übergangs-Wärmewiderstand thermal resistance, case to heatsink | pro Modul / per module $\lambda_{\text{Paste}} = 1 \text{ W/(m}\cdot\text{K)} / \lambda_{\text{grease}} = 1 \text{ W/(m}\cdot\text{K)}$ | R _{thCH} | | 6,00 | | K/kW |
| Modulinduktivität stray inductance module | | L _{sCE} | | 15 | | nH |
| Modulleitungswiderstand, Anschlüsse - Chip module lead resistance, terminals - chip | T _C = 25°C, pro Schalter / per switch | R _{CC'+EE'} | | 0,10 | | mΩ |
| Höchstzulässige Sperrschichttemperatur maximum junction temperature | | T _{vj max} | | | 150 | °C |
| Temperatur im Schaltbetrieb temperature under switching conditions | | T _{vj op} | -40 | | 125 | °C |
| Lagertemperatur storage temperature | | T _{stg} | -40 | | 125 | °C |
| Anzugsdrehmoment f. mech. Befestigung mounting torque | Schraube / screw M6 | M | 4,25 | - | 5,75 | Nm |
| Anzugsdrehmoment f. elektr. Anschlüsse terminal connection torque | Schraube / screw M4 Schraube / screw M8 | M | 1,7 8,0 | - - | 2,3 10 | Nm Nm |
| Gewicht weight | | G | | 1500 | | g |

Mit dieser technischen Information werden Halbleiterbauelemente spezifiziert, jedoch keine Eigenschaften zugesichert. Sie gilt in Verbindung mit den zugehörigen technischen Erläuterungen.


This technical information specifies semiconductor devices but guarantees no characteristics. It is valid with the appropriate technical explanations.

| | |
|------------------------------|--------------------------------|
| prepared by: Mark Münzer | date of publication: 2004-2-11 |
| approved by: Christoph Lübke | revision: 3.0 |


Ausgangskennlinie IGBT-Wechselr. (typisch)
output characteristic IGBT-inverter (typical)
 $I_c = f(V_{CE})$
 $V_{GE} = 15\text{ V}$

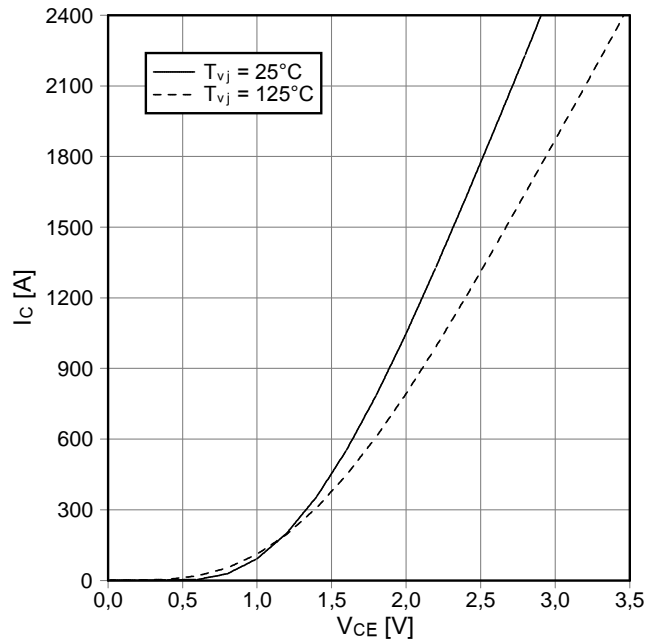


Ausgangskennlinienfeld IGBT-Wechselr. (typisch)
output characteristic IGBT-inverter (typical)
 $I_c = f(V_{CE})$
 $T_{vj} = 125^\circ\text{C}$

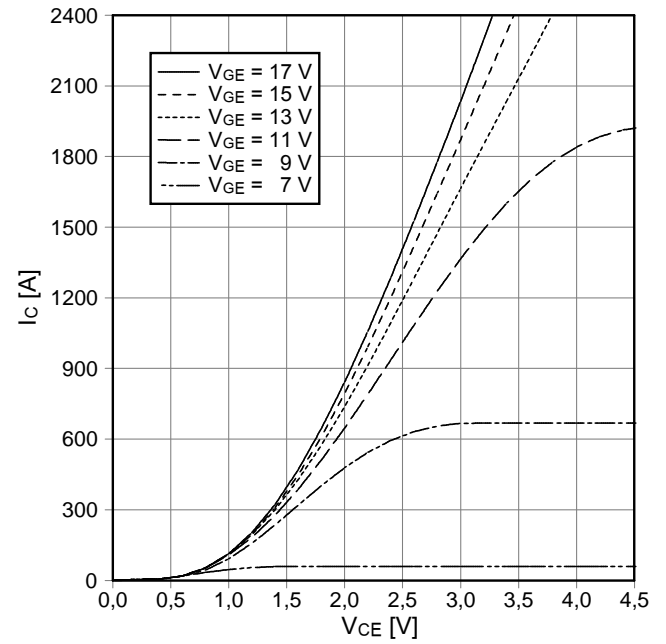

Übertragungscharakteristik IGBT-Wechselr. (typisch)
transfer characteristic IGBT-inverter (typical)
 $I_c = f(V_{GE})$
 $V_{CE} = 20\text{ V}$

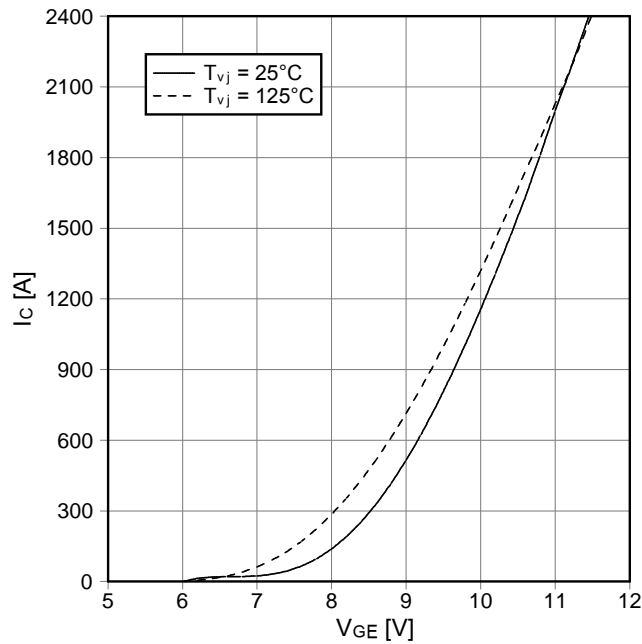


Schaltverluste IGBT-Wechselr. (typisch)
switching losses IGBT-inverter (typical)
 $E_{on} = f(I_c)$, $E_{off} = f(I_c)$
 $V_{GE} = \pm 15\text{ V}$, $R_{Gon} = 0,82\ \Omega$, $R_{Goff} = 0,82\ \Omega$, $V_{CE} = 600\text{ V}$, $T_{vj} = 125^\circ\text{C}$

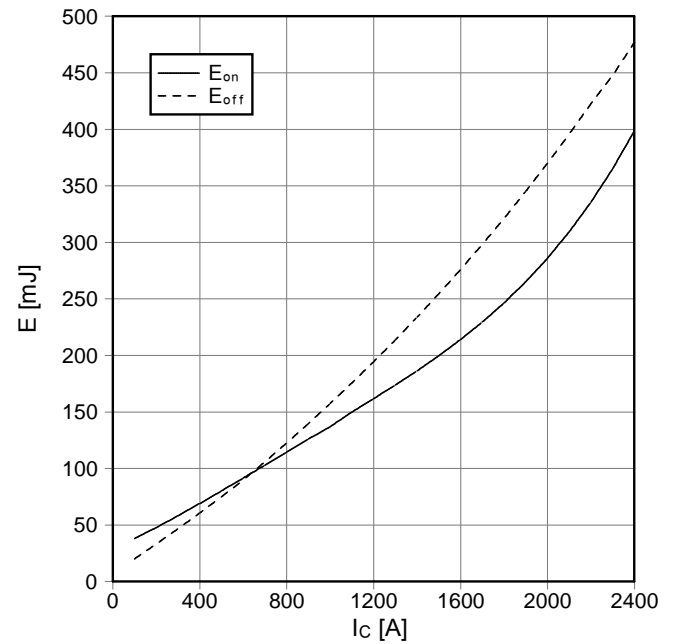


| | |
|------------------------------|--------------------------------|
| prepared by: Mark Münzer | date of publication: 2004-2-11 |
| approved by: Christoph Lübke | revision: 3.0 |


Schaltverluste IGBT-Wechselr. (typisch)
switching losses IGBT-Inverter (typical)
 $E_{on} = f(R_G)$, $E_{off} = f(R_G)$
 $V_{GE} = \pm 15\text{ V}$, $I_C = 1200\text{ A}$, $V_{CE} = 600\text{ V}$, $T_{vj} = 125^\circ\text{C}$

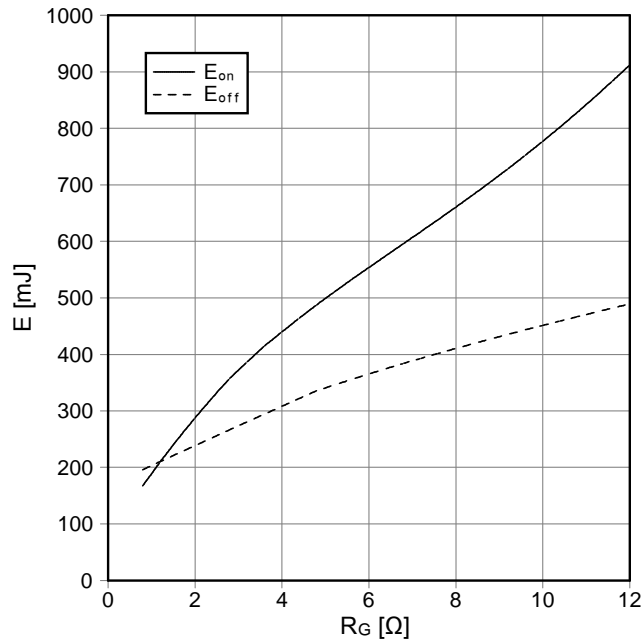


Transienter Wärmewiderstand IGBT-Wechselr.
transient thermal impedance IGBT-inverter
 $Z_{thJC} = f(t)$

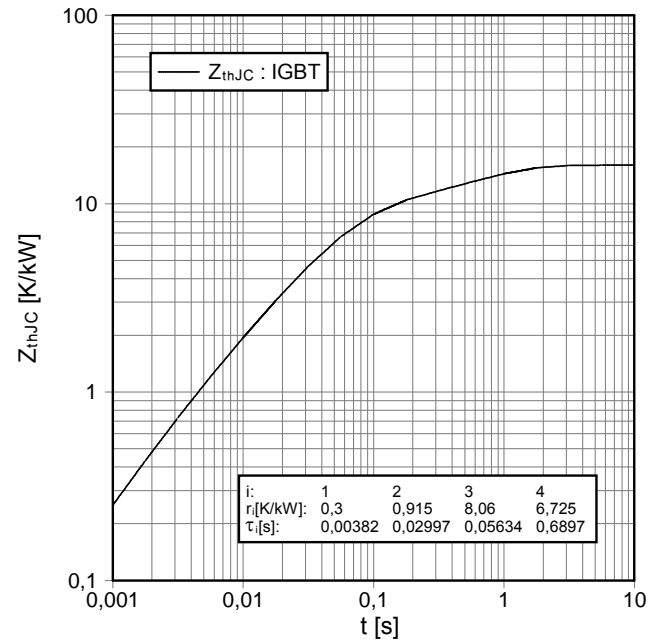

Sicherer Rückwärts-Arbeitsbereich IGBT-Wr. (RBSOA)
reverse bias safe operating area IGBT-inv. (RBSOA)
 $I_C = f(V_{CE})$
 $V_{GE} = \pm 15\text{ V}$, $R_{Goff} = 0,82\ \Omega$, $T_{vj} = 125^\circ\text{C}$

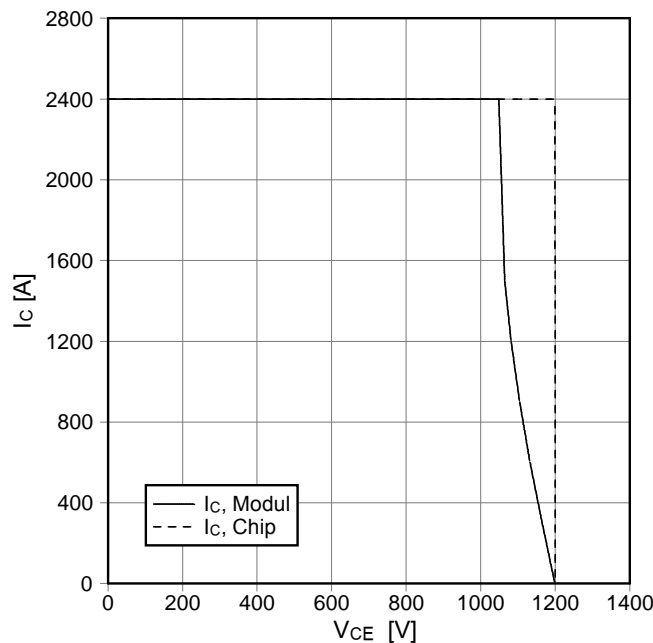


Durchlaßkennlinie der Diode-Wechselr. (typisch)
forward characteristic of diode-inverter (typical)
 $I_F = f(V_F)$

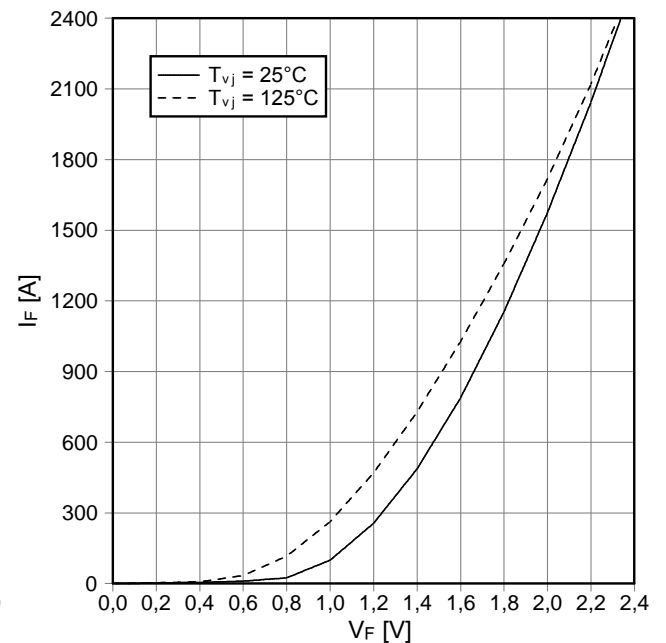


| | |
|------------------------------|--------------------------------|
| prepared by: Mark Münzer | date of publication: 2004-2-11 |
| approved by: Christoph Lübke | revision: 3.0 |


Schaltverluste Diode-Wechselr. (typisch)
switching losses diode-inverter (typical)
 $E_{rec} = f(I_F)$
 $R_{Gon} = 0,82 \Omega$, $V_{CE} = 600 V$, $T_{vj} = 125^\circ C$

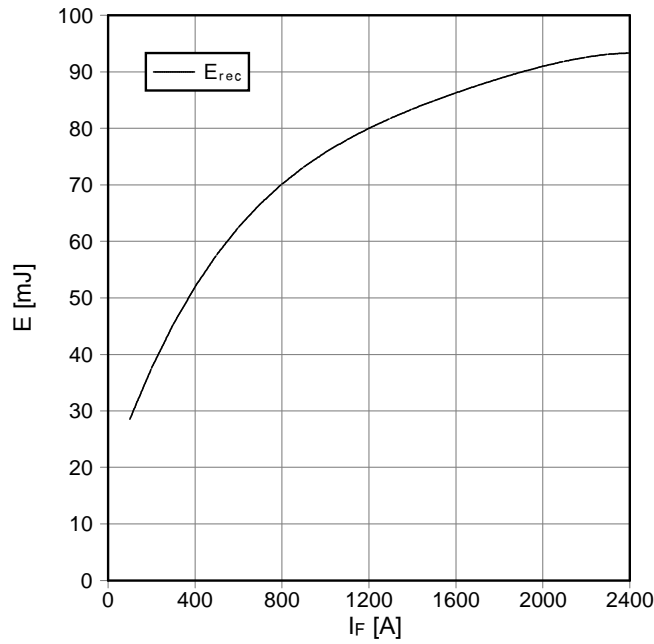

Schaltverluste Diode-Wechselr. (typisch)
switching losses diode-inverter (typical)
 $E_{rec} = f(R_G)$
 $I_F = 1200 A$, $V_{CE} = 600 V$, $T_{vj} = 125^\circ C$

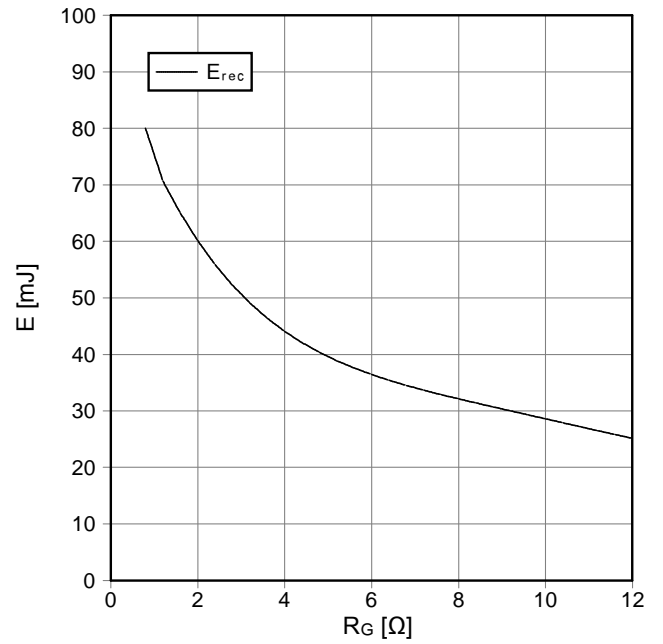


Transienter Wärmewiderstand Diode-Wechselr.
transient thermal impedance diode-inverter
 $Z_{thJC} = f(t)$

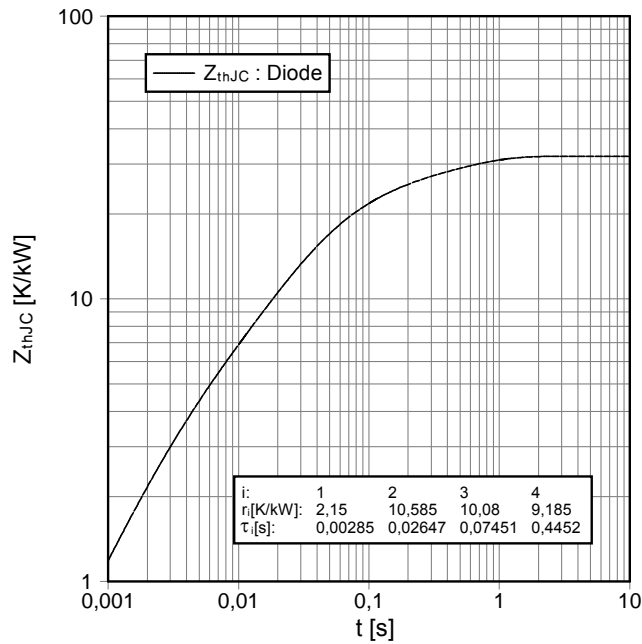


| i: | 1 | 2 | 3 | 4 |
|---------------|---------|---------|---------|--------|
| r_i [K/kW]: | 2,15 | 10,585 | 10,08 | 9,185 |
| τ_i [s]: | 0,00285 | 0,02647 | 0,07451 | 0,4452 |

| | |
|------------------------------|--------------------------------|
| prepared by: Mark Münzer | date of publication: 2004-2-11 |
| approved by: Christoph Lübke | revision: 3.0 |

Schaltplan / circuit diagram

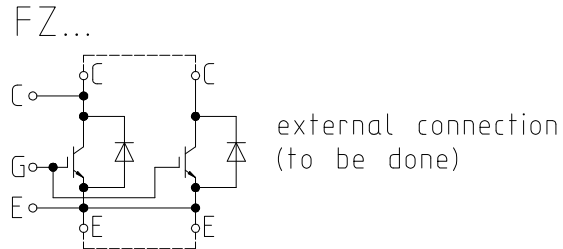

Gehäuseabmessungen / package outlines

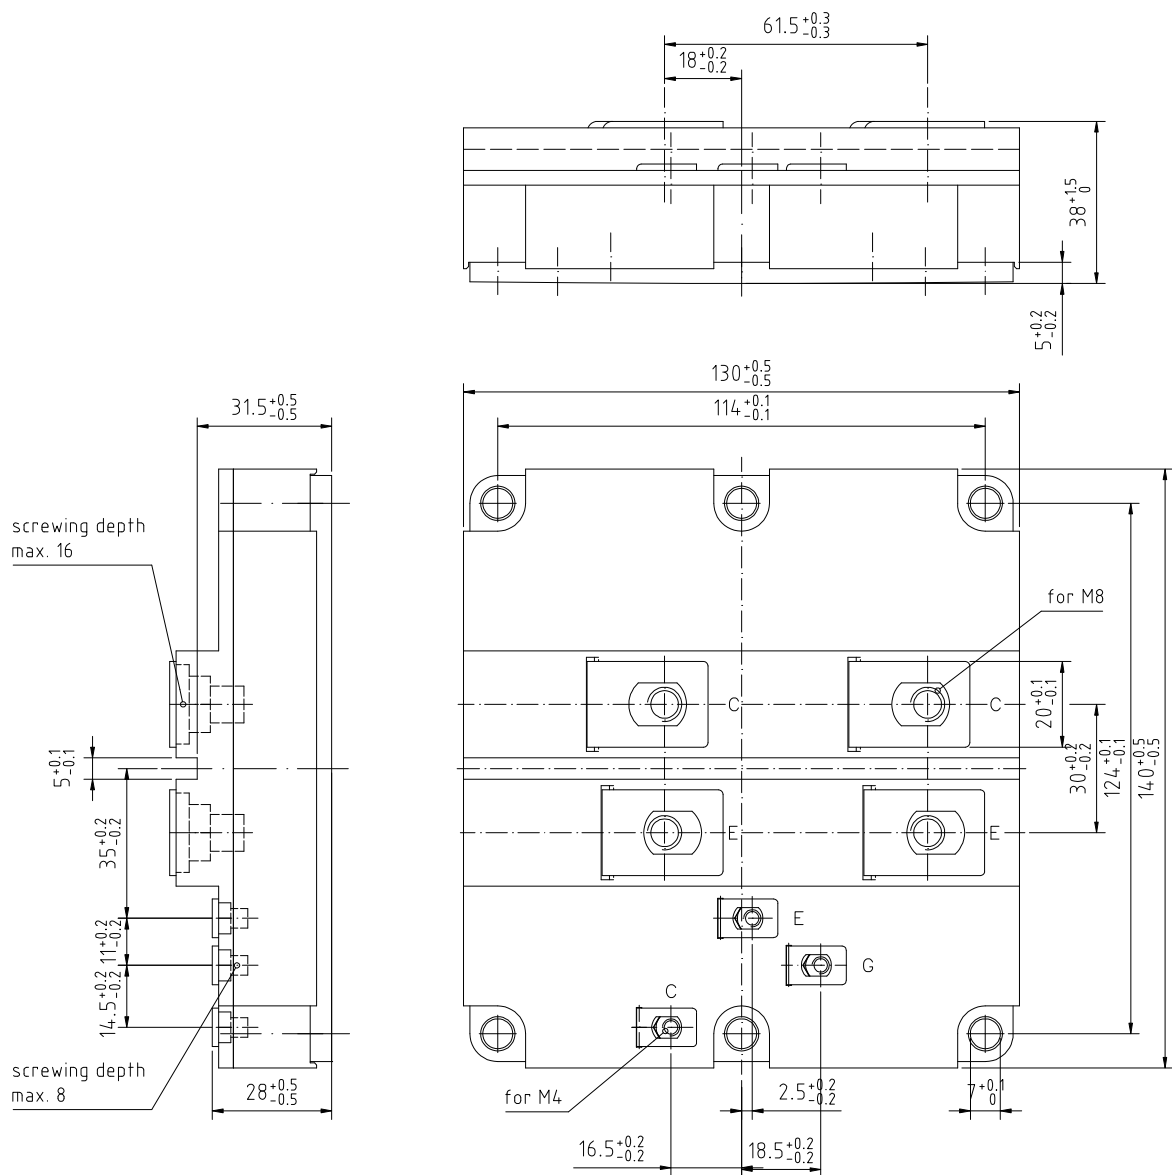

| | |
|------------------------------|--------------------------------|
| prepared by: Mark Münzer | date of publication: 2004-2-11 |
| approved by: Christoph Lübke | revision: 3.0 |

Terms & Conditions of Usage

Attention

The present product data is exclusively subscribed to technically experienced staff. This Data Sheet is describing the specification of the products for which a warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its specifications. Changes to the Data Sheet are reserved.

You and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application. Should you require product information in excess of the data given in the Data Sheet, please contact your local Sales Office via "www.eupec.com / sales & contact".

Warning

Due to technical requirements the products may contain dangerous substances. For information on the types in question please contact your local Sales Office via "www.eupec.com / sales & contact".