

7-(3) TXX-110B Tone Control P. C. Board Ass'y


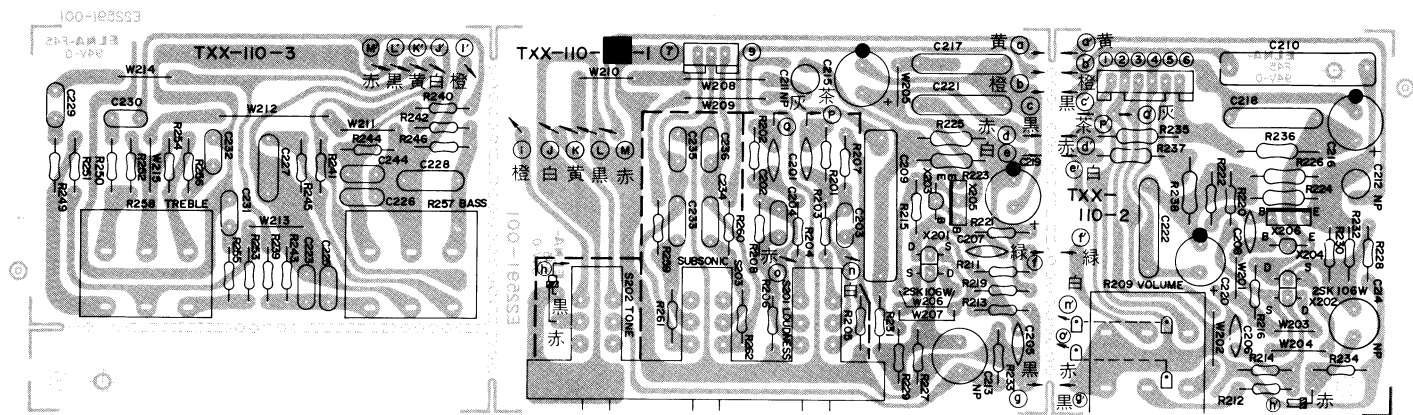


Fig. 19

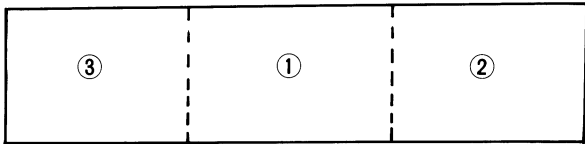

- Locations
- ① TXX-110B-1 Tone Control Amp. P.C. Board Ass'y
 - ② TXX-110-2 Volume Control P.C. Board Ass'y
 - ③ TXX-110-3 Tone Control Network P.C. Board Ass'y

Transistors

Item No.	Part Number	Rating		Description	Maker
		Pc	fT		
X201	2SK106W (C)	0.3 W	120 MHz	Silicon	Hitachi
X202	2SK106W (C)	"		"	"
X203	2SA872AV (D, E)	"		"	"
X204	2SA872AV (D, E)	"	130 MHz	"	Fujitsu
X205	2SC1904 (B, V)	1 W		"	
X206	2SC1904 (B, V)	"		"	

Capacitors

Item No.	Part Number	Rating		Description
C201	QCS31HJ-331	330 pF	50 V	Ceramic
C202	QCS31HJ-331	"	"	"
C203	QFM31HJ-273	0.027 μ F	"	Mylar
C204	QFM31HJ-273	"	"	"
C205	QCS31HJ-390	39 pF	"	Ceramic
C206	QCS31HJ-390	"	"	"
C207	QCS31HJ-390	"	"	"
C208	QCS31HJ-390	"	"	"
C209	QFZ0076-225	2.2 μ F	250 V	Film
C210	QFZ0076-225	"	"	"
C211	QEZ0046-225	"	50 V	Electrolytic (Non Pole)
C212	QEZ0046-225	"	"	"
C213	QEZ0046-226	22 μ F	50 V	"
C214	QEZ0046-226	"	"	"
C215	QEW51VA-107	100 μ F	35 V	"
C216	QEW51VA-107	"	"	"
C219	QEW51VA-107	"	"	"
C220	QEW51VA-107	"	"	"
C223	QFM31HJ-563	0.056 μ F	50 V	Mylar
C224	QFM31HJ-563	"	"	"
C225	QFM31HJ-822	8200 pF	"	"
C226	QFM31HJ-822	"	"	"