



Green
Product

REV	ZONE	REVISION	DATE

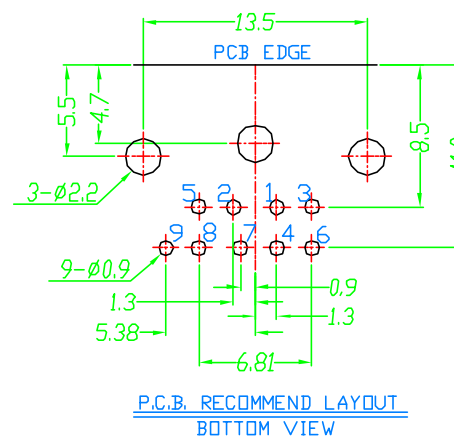

Specification:

Contact Resistance: 30m Ohm Max.

Insulation Resistance: 100M Ohm Min.AT 500V DC

Rated Voltage And Current: DC12V.2A Max;AC 100V.1A Max

Dielectric Withstanding Voltage: 250V AC For 1 Minute

Durability (Life Test): 100 Cycles

Insertion Force: 4.0KG Maximum.

Extraction Force: 0.9KG Minimum.

NO.	NAME	MATERIAL	FINISH	Q'TY
1	HOUSING	PBT G.F.	BLACK	1
2	CONTACT	PHOS. BRONZE T:0.2	Gold:1~3u"; NI:40~60u"; TIN:120u" (100% pure Tin of lead free plating)	8
3	SHIELD	BRASS T:0.3	TIN PLATED Sn:120~200u"	1
4	BOTTOM COVER	PBT G.F.	BLACK	1
5	COLLOIDAL PARTICLE	P.E.	WHITE	1
6	CONTACT	PHOS. BRONZE T:0.4	Gold:1~3u"; NI:40~60u"; IN:120u" (100% pure Tin of lead free plating)	1



KUON YI INDUSTRIAL CORP.
崑義實業股份有限公司

COMPUTER NO.			UNIT	SCALE	PART NAME	
D:\DWG\508H-9-L			mm	1:1	MINI DIN JACK FLAT 9 PIN DIP	
APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.	REV.
		TINA	08-04-10	X. .X .XX .XXX ±0.38 ±0.25 ±0.13 ±0.05		A1

MODEL

DN-508H-9-L

PAGE 1 OF 1