


F SERIES

W5-1611SA

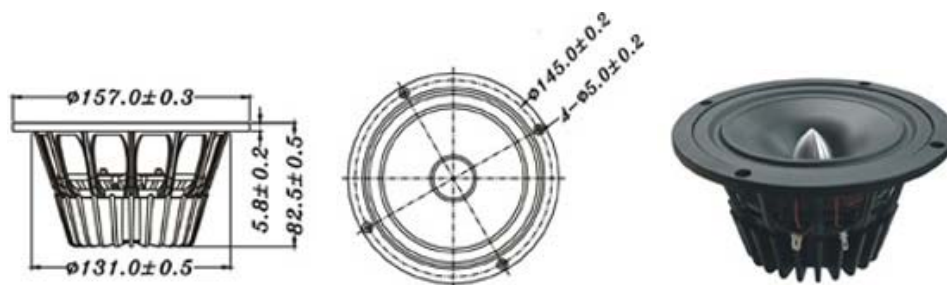

5" PP FULL RANGE

- FULL RANGE DESIGN
- BLACK COLOR PP CONE WITH WIDE RANGE TEMPERATURE, HIGH LOSS RECIPE OF RUBBER SURROUND
- VENTED POLE PIECE, NONCOMPROMISED UNDERHUNG NEODYMIUM MAGNET WITH ALUMINUM DIE CAST HEAT SINK
- GF REINFORCED NYLON BASKET



**TB** SPEAKERS

VOICE: 886.2.26570282 FAX: 886.2.26580166  
E-MAIL: info@tb-speaker.com

DIAPHRAGM MTL	Black color PP
SURROUND MTL	Rubber
NOMINAL IMPEDANCE	8 Ω
DCR IMPEDANCE	6.8 Ω
SENSITIVITY 1W/1m	90 dB
FREQUENCY RESPONSE	60-20K Hz
FREE AIR RESONANCE	60 Hz
VOICE COIL DIAMETER	25.4 mm
AIR GAP HEIGHT	10 mm
RATED POWER INPUT	28 W
MAXIMUM POWER INPUT	56 W
FORCE FACTOR, BL	5.18 TM
MAGNET WEIGHT (oz)	Neodymium
MOVING MASS	5.76 g
FERRO FLUID ENHANCED	No
SUSPENSION COMPL.	1037 uMN <sup>-1</sup>
EFFEC.PISTON AREA	0.0094 m <sup>2</sup>
Levc	0.11 mH
Zo	32 ohm
X-max	3 mm
Vas	13.02 Litr.
Qts	0.44
Qms	1.67
Qes	0.6

**CLOSE**