



# Buffalo32S test report

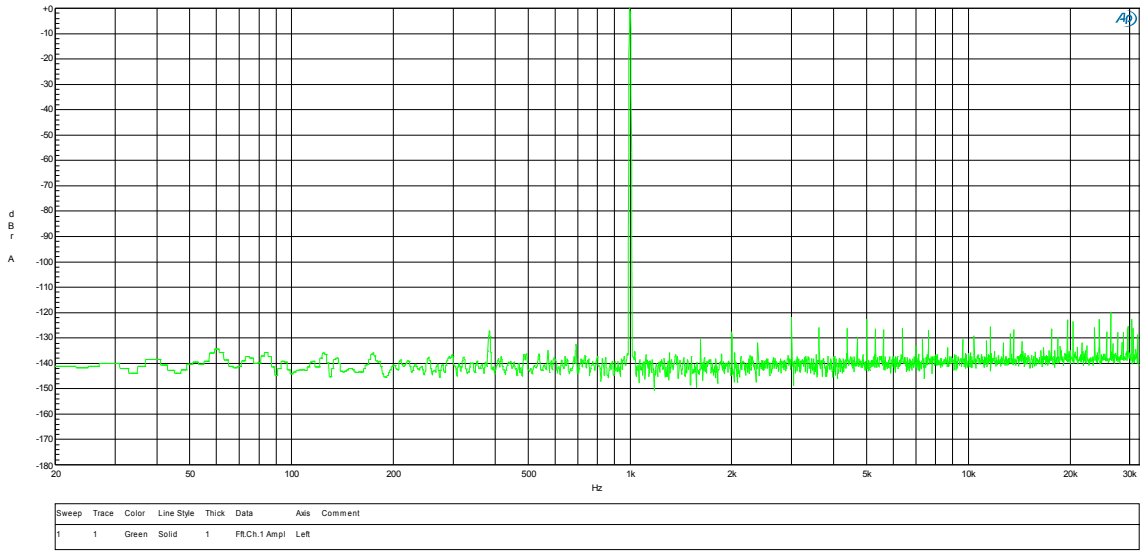

Buffalo 32S Differential output FFT @ 1k. (-117dB THD+N)

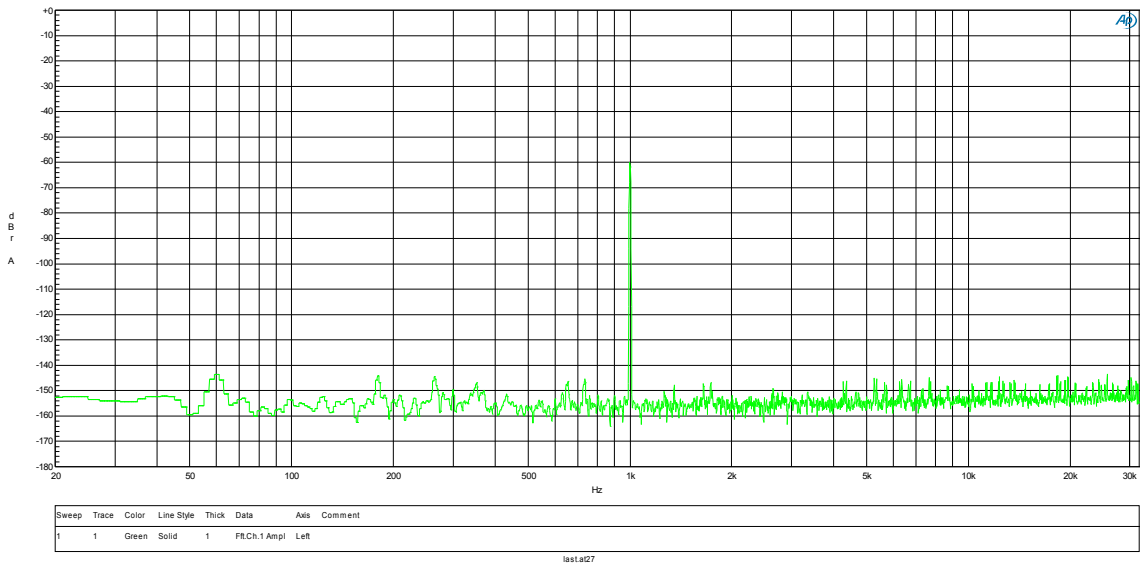

Buffalo 32S Differential Output DNR

	<b>DNR</b>	<b>THD+N 1kHz</b>	<b>THD+N 20kHz</b>
<b>Single Ended Output</b>	-123	-117	-117

	<b>DNR</b>	<b>THD+N 1kHz</b>	<b>THD+N 20kHz</b>
<b>Single Stage Differential Output</b>	-129	-116	-117
<b>Normal Differential Output(low impedance)</b>	-127	-118	-117

---