


CONNECTING THE SPEAKERS FOR MONOPHONIC OPERATION

If the Citation B is to be used monophonically and stereo is to be added at a later date, it is essential that both speaker output terminals are terminated into a proper load. Refer to Diagram B for proper installation of the loading resistor.

*AT NO TIME SHOULD THE OUTPUT TERMINALS BE PARALLELED
FOR MONOPHONIC OPERATION.*

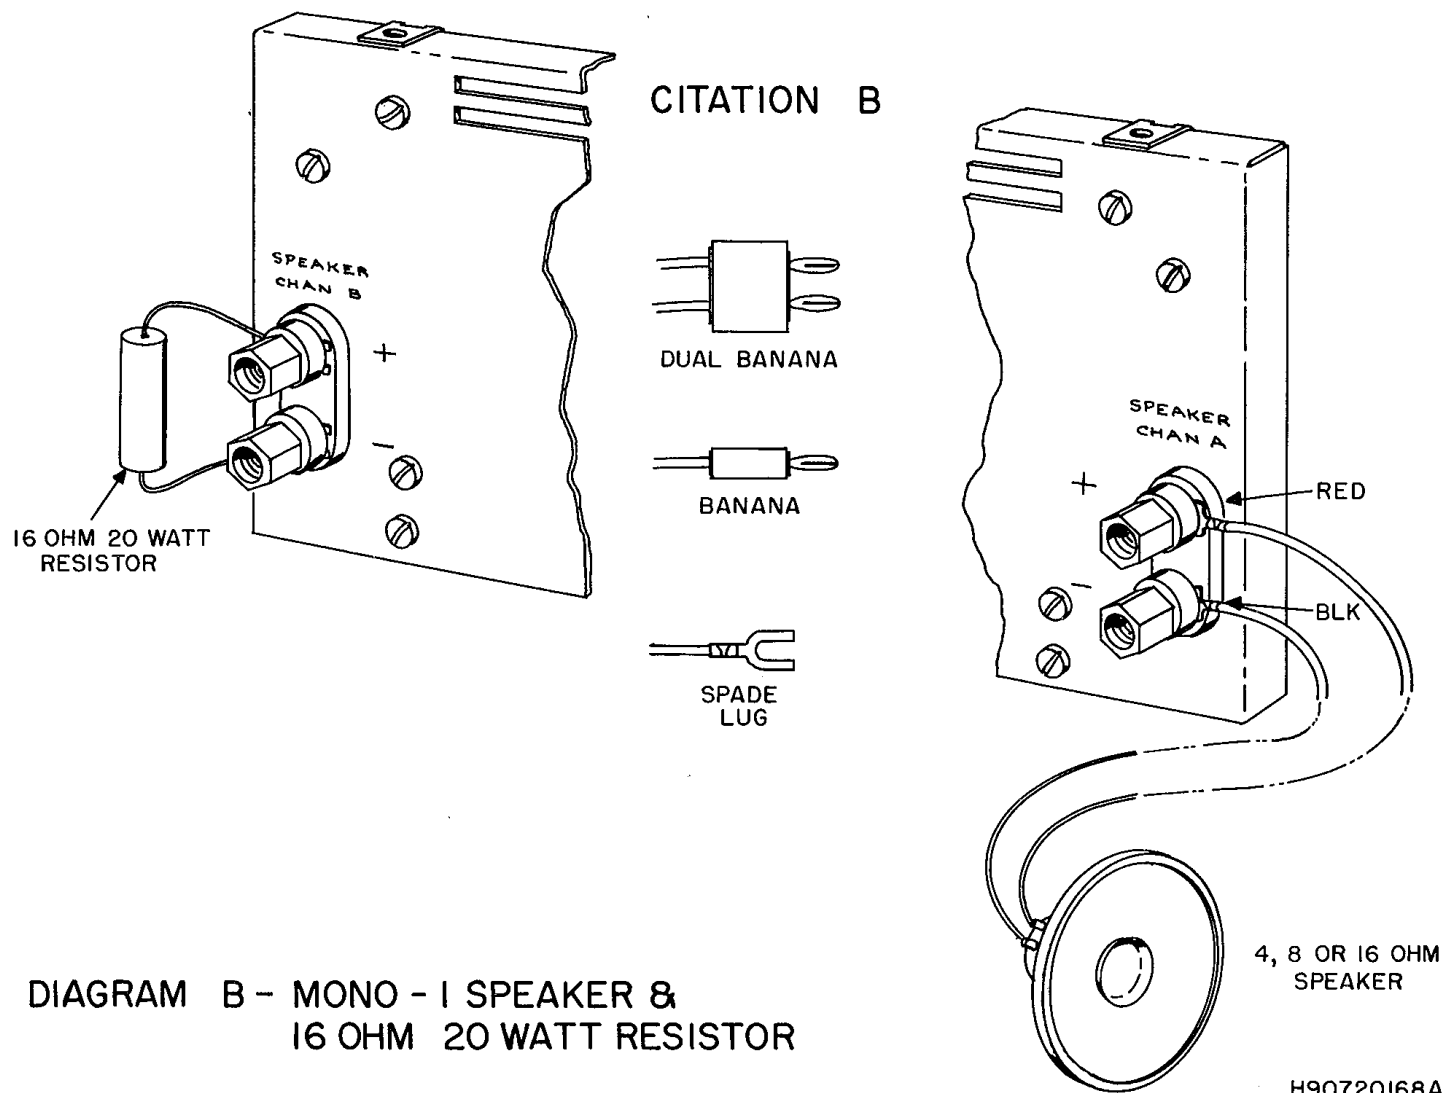

This is the only correct method for connecting a single monophonic speaker to the Citation B.

CONNECTING THE PREAMPLIFIER

Standard patch cords with RCA phono plugs at each end should be used to connect your monophonic or stereophonic preamplifier to the Citation B.

Connect one patch cord from the left (Channel A) output of your preamplifier to the CHANNEL A input of your Citation B. Connect an additional patch cord from the right (Channel B) output of your preamplifier to the CHANNEL B input of your amplifier. **WARNING: DO NOT REMOVE OR MANIPULATE THE INPUT CONNECTIONS WHILE YOUR AMPLIFIER IS ON. THIS MAY RESULT IN DAMAGE TO YOUR AMPLIFIER OR YOUR SPEAKERS.**