


# AMPLIMO Toroidal Output Transformer type 100PP2K2S



primary impedance	2200 Ω
secondary impedance	0 - 4 - 8 Ω
turns ratio	23.5 (4Ω) - 16.6 (8Ω)
UL-tap	35%
nominal power	100W
-3dB frequency bandwidth	5Hz - 175kHz
power bandwidth (-3dB) starting at	28Hz
primary inductance	670H
primary leakage ind.	3.8mH
primary capacitance	345pF
primary DC-resistance	190Ω
secondary DC-resistance	80mΩ(4Ω) 150mΩ(8Ω)
dimensions od x height	113mm x 53mm
mounting	toroidal clamp & washers
weight	2.2kg

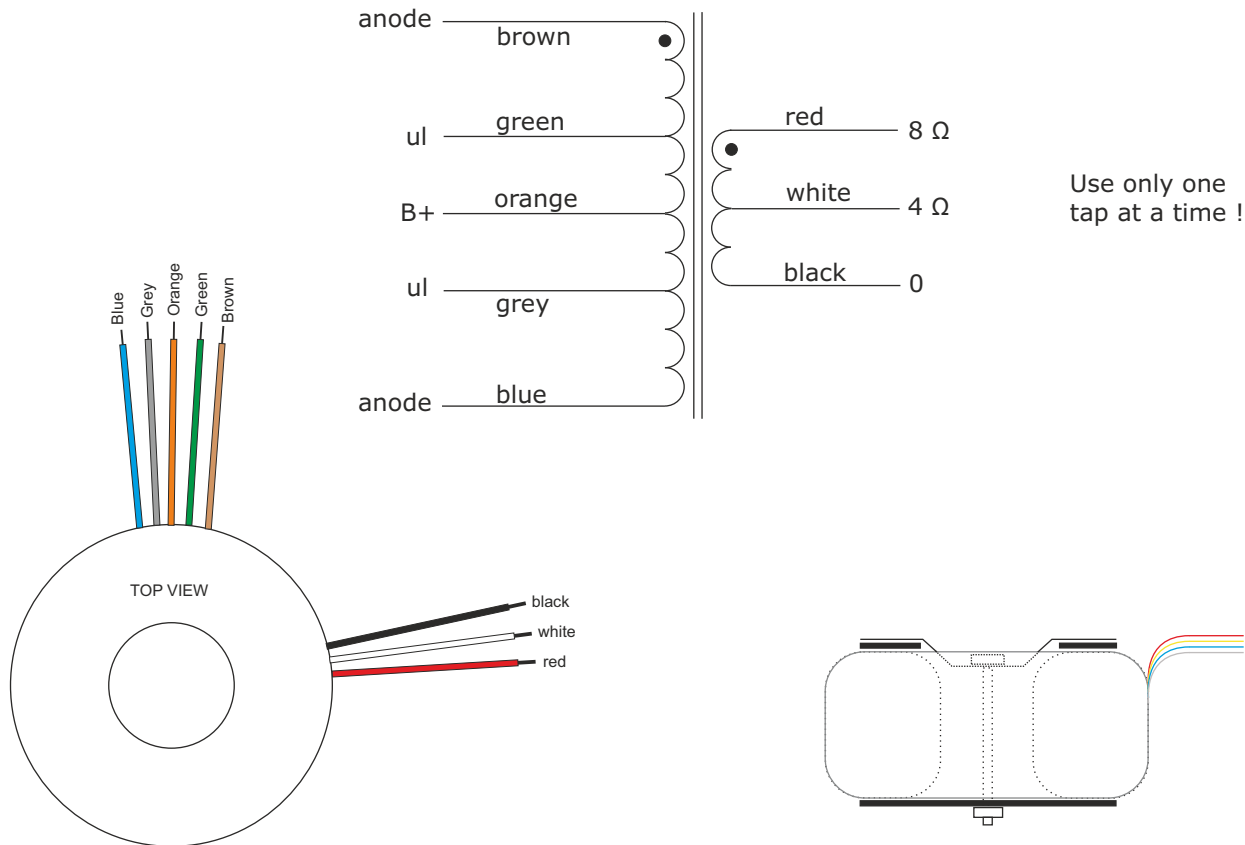

Industrieweg 14  
NL-7161BX NEEDE  
The Netherlands

P O - B o x 2 7  
NL-7160AA NEEDE  
The Netherlands  
Tel.+31 (0)545 283456  
Fax+31 (0)545 283457

info@amplimo.nl  
<http://www.amplimo.nl>

HB

May 2020

# 100PP2K2S

Wide bandwidth toroidal  
tube output transformer

© Copyright Amplimo BV

