


Input +/-50V
 Input Z 100 MEG Ohms
 Biasing: Positive input approx +1.5V
 Output +/- 50V
 Output Z < 1K Ohms O/L
 and 1 Ohm w/ feedback
 Output Current +/-1mA into 50K
 Rise time 2us, BW>100KC
 Drift 5mV per day ref. to input
 Power supply +/-300VDC
 @ 4.5 mA
 and 6.3V@600mA

GAP/R K2-W Operational Amplifier

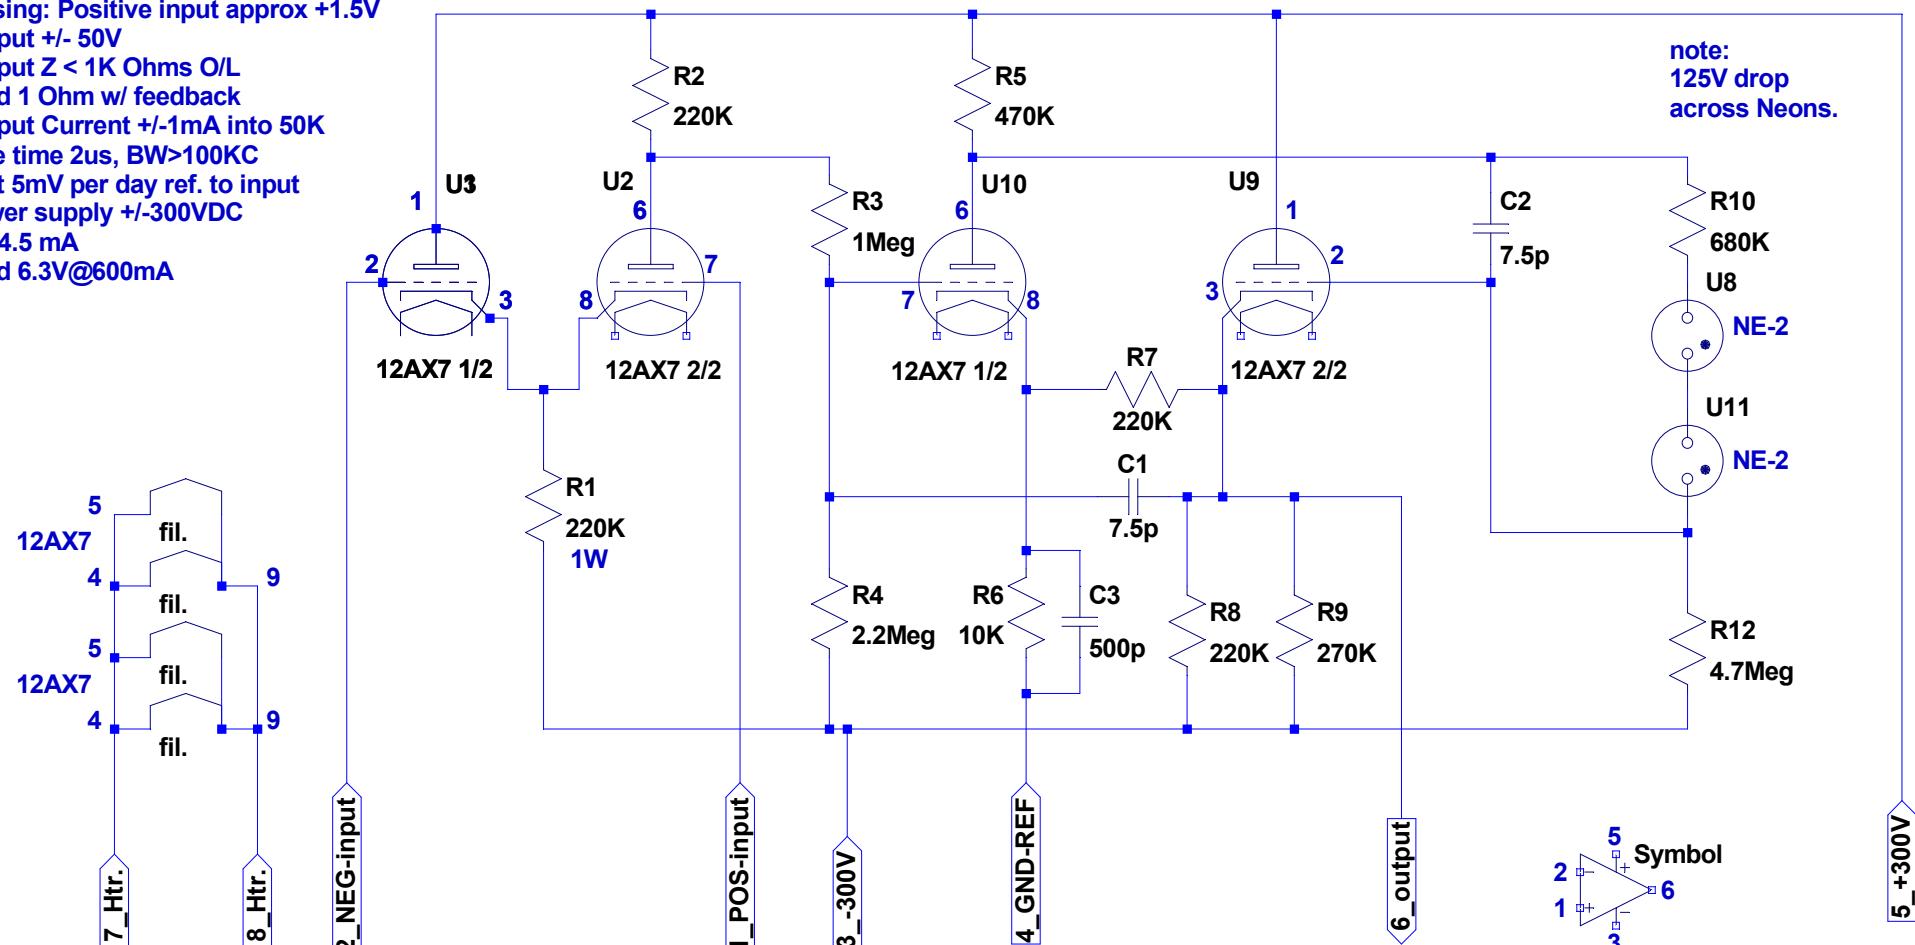

DWG_K2-W_KD5OEI_20150316
 Reference: <http://www.philbrickarchive.org/>