


Input +/-50V  
 Input Z 100 MEG Ohms  
 Biasing: Positive input approx +1.2V  
 Output +/- 100V  
 Output Z 200 Ohms O/L  
 and 0.2 Ohms w/ feedback  
 Output Current +/-2mA into 50K  
 Rise time 1us, BW>250KC  
 Drift 5mV per day ref. to input  
 Power supply +/-300VDC  
 @ 7.5 mA  
 @ 10.5mA IF R14 used  
 and 6.3V@750mA

## GAP/R K2-X Operational Amplifier

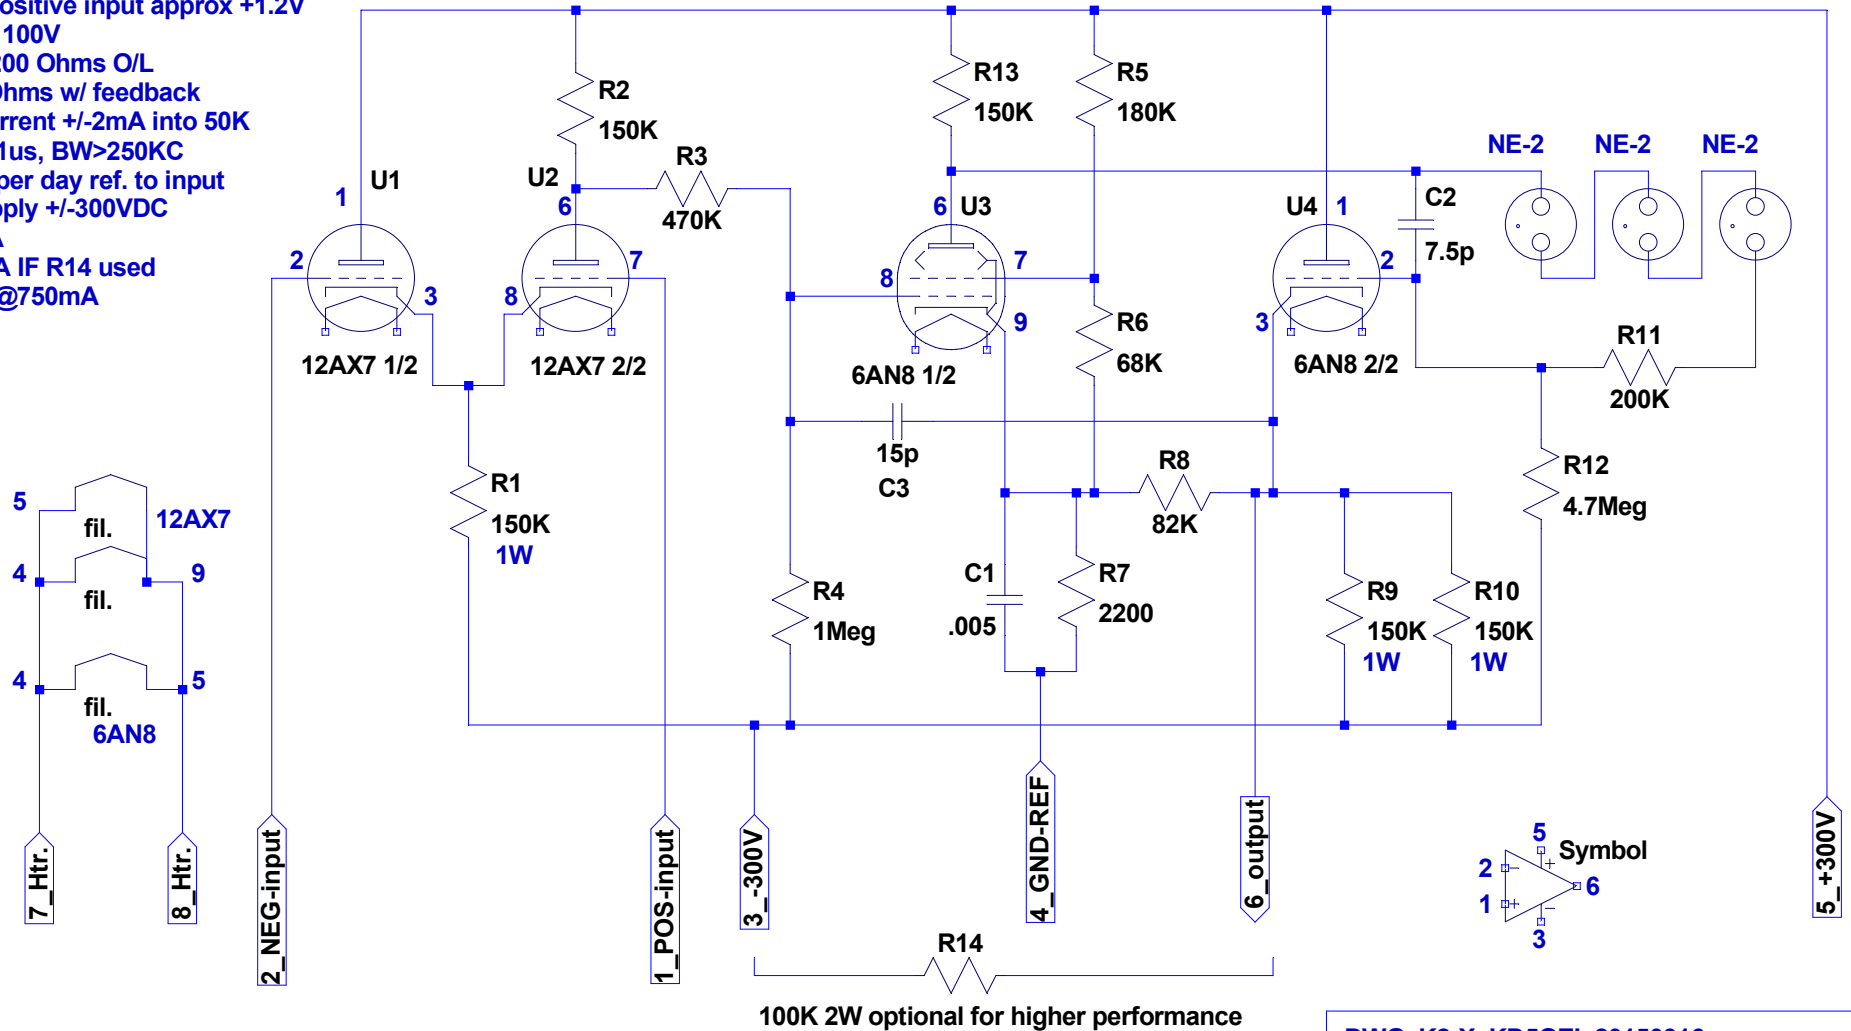

DWG\_K2-X\_KD5OEI\_20150316  
 Reference: <http://www.philbrickarchive.org/>