




# SUBWOOFER

## 12" 4Ω/200 Watts

### 12" HI End Long Throw subwoofer with Aluminum Shorting Ring

#### Electrical

Nominal Impedance	4 Ohms
Resonance Frequency	25 Hz
Power Handling {IEC-268-5C}	200 Watt
Long Term Power {IEC-268-5L}	600 Watt
Short Term Power {IEC-268-5S}	1000 Watt
Sensitivity (2.83V/1m)	91 dB
Resistance (DC)	3.5 Ω
Qms	6.91
Qes	0.43
Qts	0.41
BL	14.23 T-M
VAS	86.57 Liters

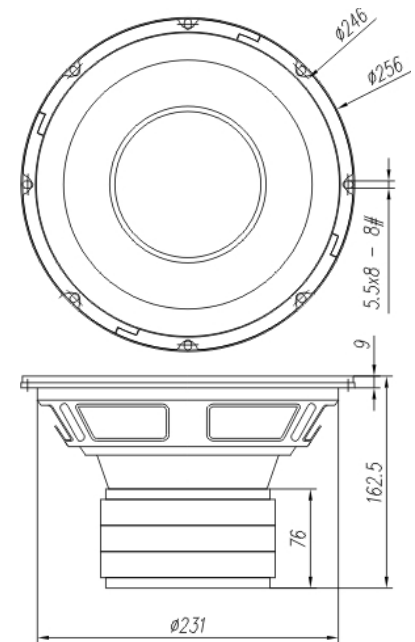

All Dimensions are in mm

#### Mechanical

Voice Coil Dia	50 mm
Winding Width	32.60 mm
Former	TIL
Layers	4
Wire Type	Copper
Magnet	134 mm
Cone Material	Paper
Surround Material	Rubber
Chassis	Powder Coated
Dust Cap	Paper

Note : - Available in Both Metal & Diecast Basket

