



# NAP 200 & NAP 150 Connection & Specifications

## 15.1 NAP 200 Rear


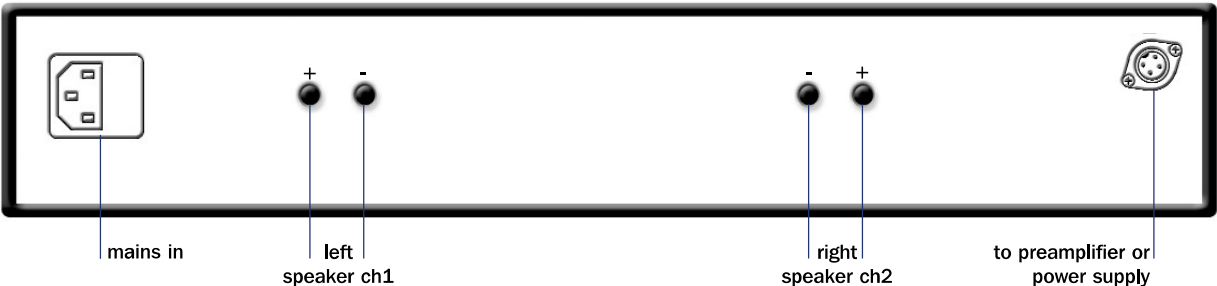


## 15.2 Specifications

### NAP 200

Power Output:	
Continuous, 8 ohms	70 Watts per channel
Transient	300 VA
Quiescent Power Consumption	11VA
Voltage Gain	+29dB
Input Impedance	18 kilohms
Frequency response	-3dB @ 2Hz and 65kHz
Power Supply Output	24V, 0.3A
Case size (H x W x D)	87 x 432 x 314mm
Mains Supply:	100V, 115V, 230V - 50/60Hz
Weight:	11.6kg

## 15.3 NAP 150 Rear

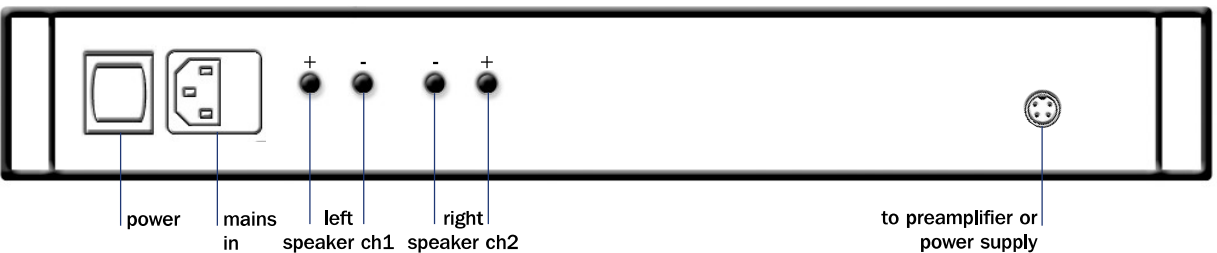

## 15.4 Specifications

### NAP 150

Power Output:	
Continuous, 8 ohms	50 Watts per channel
Transient	250 VA
Quiescent Power Consumption	10VA
Voltage Gain	+29dB
Input Impedance	18 kilohms
Frequency response	-3dB @ 3Hz and 50kHz
Power Supply Output	24V, 0.3A
Case size (H x W x D)	69.4 x 432 x 301mm
Mains Supply:	100V, 115V, 230V - 50/60Hz
Weight:	7.5kg