

- Notes:
1. See Bias Adjustment Procedure.
  2. U1 input (pin 2) virtual ground, output test point 8 (pin 6) 275mV.
  3. Early production units replace R28 with capacitor C15 (0.1uF) found in either side of the pc board.
  4. All resistors are 1/2 watt 5% unless otherwise specified.
  5. All capacitor in uF unless otherwise specified.

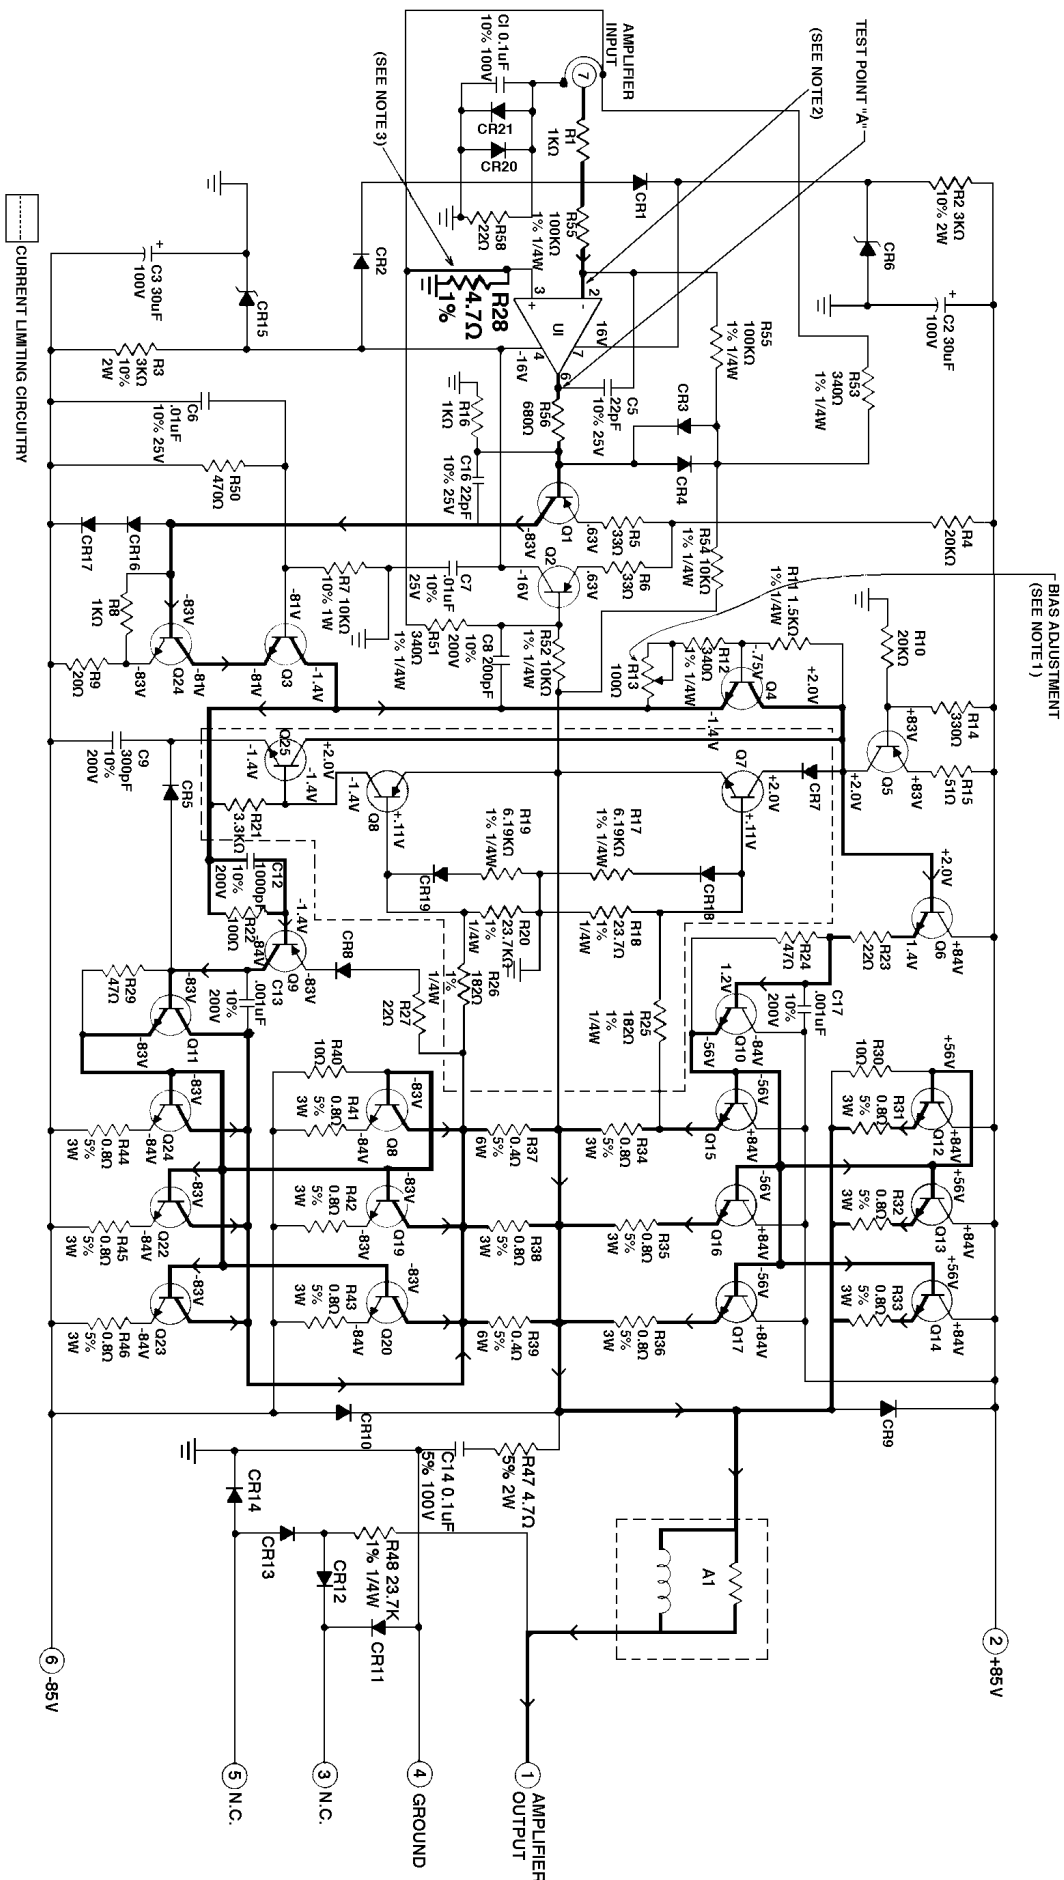


Figure 12. Amplifier Schematic Diagram