



ELECTROLYTE CAPACITORS AUDYN® EGL BIPOLAR

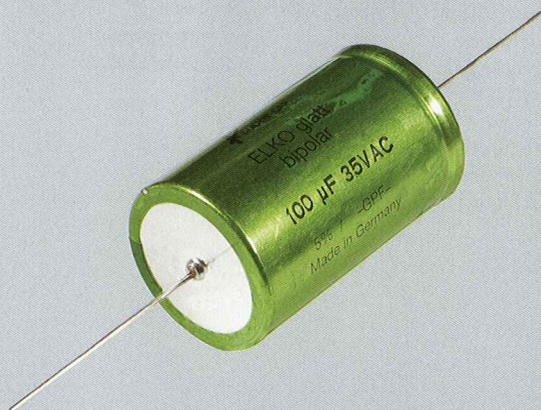

Electrolyte Capacitor. bipolar. with smooth anode
 Connections: Copper Wire, tinned
 Capacity Region: from 1.0 μ F to 100.0 μ F
 Wire Voltage: 35 VAC, 50 VAC und 70 VAC
 C-tolerance: $\pm 5\%$
 Loss Factor $\tan \delta$: < 0.023 at 1kHz

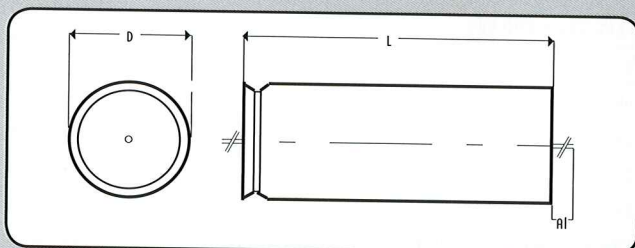

ELKO Smooth • 50 VAC

Description	C/ μ F	DxL/mm	Order Number
EGL/1.0/50/5	1.00	10x26	134 1033
EGL/1.5/50/5	1.50	10x26	134 1034
EGL/2.2/50/5	2.20	12x26	134 1036
EGL/3.3/50/5	3.30	12x26	134 1038
EGL/3.9/50/5	3.90	12x26	134 1039
EGL/4.7/50/5	4.70	12x35	134 1040
EGL/5.6/50/5	5.60	14x35	134 1042
EGL/6.8/50/5	6.80	14x35	134 1045
EGL/8.2/50/5	8.20	14x35	134 1048
EGL/10/50/5	10.0	18x35	134 1055
EGL/15/50/5	15.0	18x35	134 1060
EGL/22/50/5	22.0	25x35	134 1065
EGL/33/50/5	33.0	25x40	134 1070
EGL/47/50/5	47.0	25x50	134 1075

ELKO Smooth • 35 VAC

Description	C/ μ F	DxL/mm	Order Number
EGL/68/35/5	68.0	25x50	134 1080
EGL/82/35/5	82.0	30x50	134 1083
EGL/100/35/5	100.0	30x50	134 1085

ELKO Smooth • 70 VAC

Description	C/ μ F	DxL/mm	Order Number
EGL/2.2/70/5	2.20	12x26	134 1570
EGL/3.3/70/5	3.30	14x26	134 1574
EGL/3.9/70/5	3.90	14x26	134 1576
EGL/4.7/70/5	4.70	14x26	134 1577
EGL/5.6/70/5	5.60	14x35	134 1578
EGL/6.8/70/5	6.80	16x35	134 1579
EGL/8.2/70/5	8.20	16x35	134 1580
EGL/10/70/5	10.0	18x35	134 1582
EGL/15/70/5	15.0	21x35	134 1585
EGL/22/70/5	22.0	25x40	134 1588
EGL/33/70/5	33.0	25x50	134 1592
EGL/47/70/5	47.0	30x50	134 1595