


P	V1, V2	V3, V4	V5, V6	V7, V8 V9, V10	V11
1	12*	80	200	0	—
2	12*	0	105	0	360
3	—	3	112	12*	—
4	1.3	12*	12*	12*	300
5	0	12*	12*	12*	—
6	175	120	105	—	300
7	80	0	0	350	—
8	0	0.9	0.85	—	360
9	0.8	12*	12*	345	

Note: Measurements with LOUDNESS control set at MINIMUM.

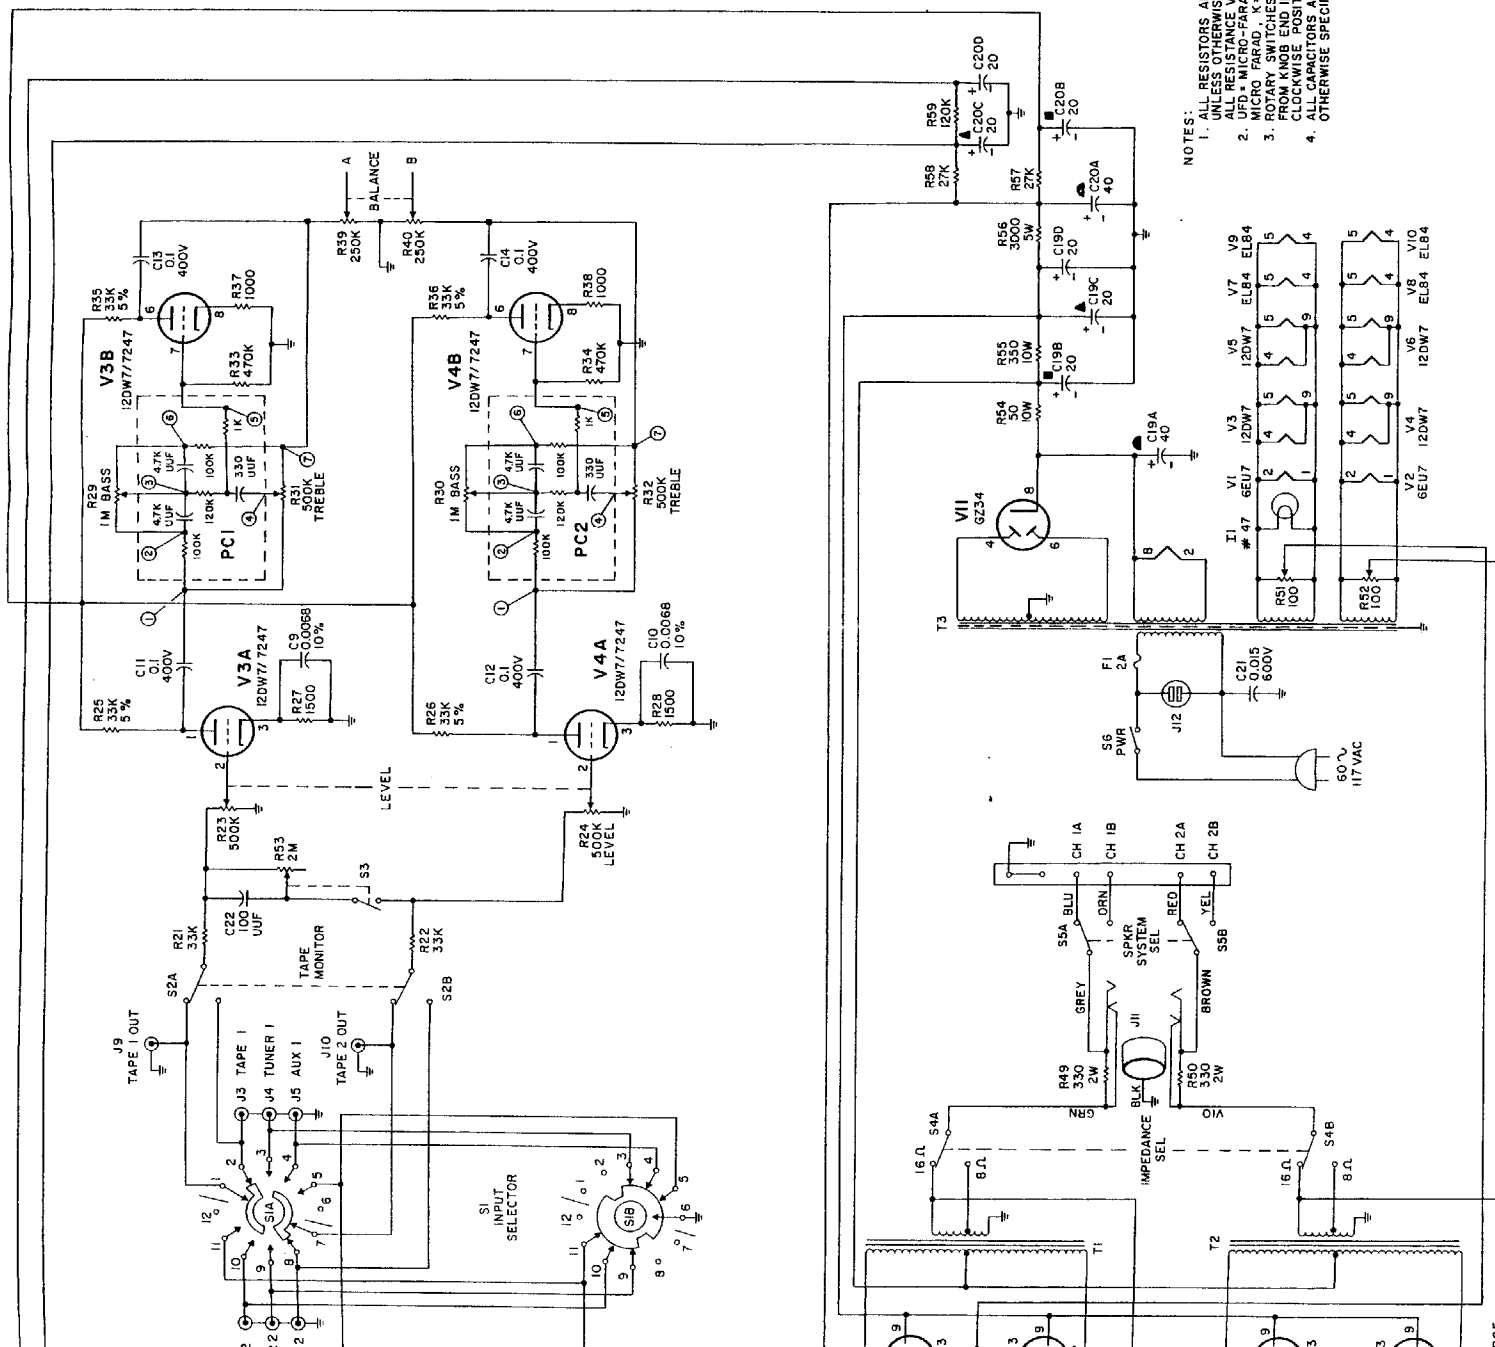

NOTES:

1. ALL RESISTORS ARE 1/2W 10% UNLESS OTHERWISE SPECIFIED.
2. ALL RESISTANCE VALUES ARE IN OHMS.
UFD = MICRO-FARAD, UUF = MICRO-
MICRO-FARAD, K = KILOHMS M = MEGOHMS.
3. ROTARY SWITCHES ARE SHOWN VIEWED
FROM KNOB END IN EXTREME COUNTER
CLOCKWISE POSITIONS.
4. ALL CAPACITORS ARE IN UFD UNLESS
OTHERWISE SPECIFIED.