

APPROVAL SHEET

(承認仕様書)

CUSTOMER	
I T E M	NTC THERMISTOR
M O D E L	DSC-20D-20 MSSB
APPLICATION	
REMARK	

D S C ELECTRONICS CO., LTD.

9-2, Suyoung- Ri, Bongdam-Eup, Hwasung- City, KOREA

TEL : (031) 296-7093

FAX : (031) 296-7096

SPECIFICATION FOR NTC THERMISTOR

IN-RUSH CURRENT LIMITER : 22 PIE


1. APPLICATIONS

- 1) INRUSH CURRENT LIMITING IN PERIPHERAL COMMUNICATION EQUIPMENT, MONITORS, PCs, SMPS.
- 2) SOFT-START MOTORS, e.g. IN VACUUM CLEANERS
- 3) CIRCUIT APPLICATIONS REQUIRING HIGH CONTINUOUS CURRENTS
- 4) USEABLE IN SERIES CONNECTION UP TO 250 Vrms

2. FEATURES

- 1) HIGH RELIABILITY AND MINIMIZED AGE DRIFT, LOW-COST AND WIDE APPLICATIONS
- 2) BLACK SILICONE OR EPOXY COATED THERMISTOR DISK
- 3) STRAIGHT OR IN/OUT KINKED OR CUTTED LEADS OF TINNED, NICKEL PLATED COPPER WIRE
- 4) USEABLE IN SERIES CONNECTIONS UP TO MAX. 260Vrms (STEADY STATE 240Vrms)
- 5) AVAILABLE ON TAPE
- 6) RESISTANCE TOLERANCE $< \pm 20\%$ AVAILABLE UPON REQUEST

3 DIMENSION

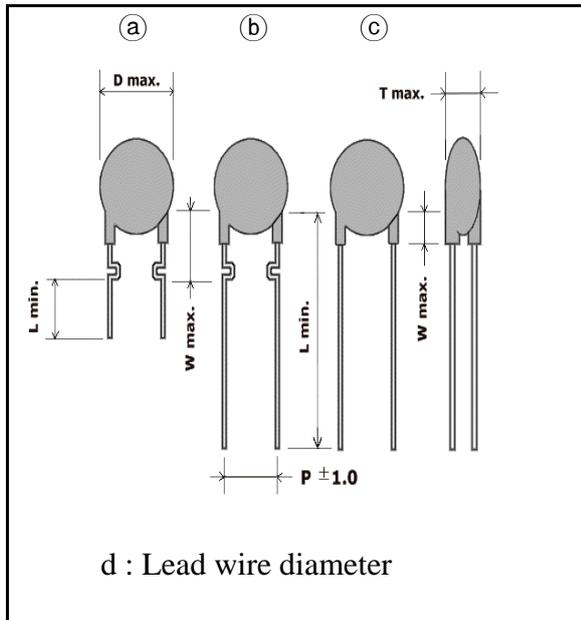

(UNIT : mm)

	(a)	(b)	(c)
D (MAX.)	23.0	23.0	23.0
T (MAX.)	6	6	6
P	10.0	10.0	10.0
W (MAX.)	8	8	6
L (MIN.)	6 ± 1.0	25	25
d	$\phi 1.0$	$\phi 1.0$	$\phi 1.0$
WIRE FORM	F/C	F	S

4. ELECTRICAL CHARACTERISTICS

- 1) ZERO POWER RESISTANCE AT 25°C (Ohms) :
- 2) MAX STEADY STATE CURRENT (Amps) :
- 3) THERMAL DISSIPATION CONSTANT (mW/°C) : REFERENCE No. 5
- 4) THERMAL TIME CONSTANT (sec) :
- 5) OPERATING TEMPERATURE (°C) :
- 6) B VALUE (25/85°C) :

SPECIFICATION FOR NTC THERMISTOR

5. SPECIFICATIONS OF SIMILAR SIZE

TYPE No.	NORMAL RESISTANCE AT 25 °C (Ω)	MAX. STEADY STATE CURRENT (A)	THERMAL DISSIPATION CONSTANT (mW/°C)	THERMAL TIME CONSTANT (sec)	NORMAL B CONSTANT (25/85 °C,K)
DSC - 1D - 20	1.0	13	23	100	2950±15%
DSC - 2D - 20	2.0	11	24	100	3000
DSC - 2.5D - 20	2.5	10	24	100	3000
DSC - 3D - 20	3.0	9	24	100	3100
DSC - 5D - 20	5.0	8	25	95	3150
DSC - 6D - 20	6.0	7.5	24	90	3150
DSC - 10D - 20	10.0	6.5	29	95	3150
DSC - 20D - 20	20.0	4.8	29	105	3200
DSC - 30D - 20	30.0	2	28	115	3230

※ Resistance tolerance : <±20%

6. MATERIALS LIST

ITEM	MATERIAL	DESCRIPTION	WEIGHT(g)	HAZARDOUS SUBSTANCE
Element	Mn3O4	POWDER 99% Up	4.5±0.5	CONTAIN (PPM)
	Co3O4	POWDER 99% Up		Pb N . D
	NiO	POWDER 99% Up		Cd N . D
	CuO	POWDER 99% Up		Hg N . D
	Paste	Ag		Cr+6 N . D
Lead wire	Cu / Sn	1.0 pie		PBBs N . D
Solder	Sn×Ag	98.0 / 2.0		PBDs N . D
Coating	Silicone	DP-777DBK		

7.TERMINOLGY AND GENERAL SPECIFICATIONS


TECHNICAL TERMS	DESCRIPTIONS	SPEC.
OPERATING TEMP.	OPERATING TEMPERATURE RANGE WITHOUT DERATING	-40 TO 180°C
STORAGE TEMP	STORAGE TEMPERATURE RANGE WITHOUT CURRENT APPLIED.	-30 TO 80°C
ZERO POWER RESISTANCE	THE ZERO POWER RESISTANCE IS THE RESISTANCE OF A THERMISTOR AT 25°C AMBIENT TEMPERATURE.	SEE RATING TABLE
B VALUE	<p>B VALUE CAN BE DERIVED BY MEASURING THE RESISTANCE AT 25°C (R1) AND 85°C (R2) AND CALCULATING BY FOLLOWING FORMULA.</p> $B = \frac{\ln(R2/R1)}{1/(273.15+T2) - 1/(273.15+T1)}$	SEE RATING TABLE
MAX. STEADY STATE CURRENT	THE MAX STEADY STATE CURRENT IS THE MAXIMUM ALLOWABLE CURRENT AT LOADING TO MAX OPERATING TEMPERATURE IN 25°C AMBIENT.	SEE RATING TABLE
THERMAL DISSIPATION CONSTANT	THE DISSIPATION CONSTANT MEANS THE AMOUNT OF POWER REQUIRED TO RAISE THE APPLIED TEMPERATURE TO THE THERMISTOR IN STATIONARY STATE FOR 1°C.	SEE RATING TABLE
THERMAL TIME CONSTANT	<p>THE TIME CONSTANT IS DEFINED AS RELATIONSHIP BETWEEN THE THERMAL CAPACITY AND DISSIPATION CONSTANT. IT IS MEASURED AS TIME IN SECONDS WHICH IS NEEDED FOR THERMISTOR TEMPERATURE CHANGE OF 63.2% DIFFERENCE BETWEEN INITIAL AND FINAL THERMISTOR TEMPERATURE.</p>	SEE RATING TABLE

D S C

TECHNICAL TERMS	DESCRIPTIONS	SPEC.
LOAD LIFE	THERMISTOR SHALL BE STORED FOR 1,000± 12HOURS AT 25 °C ± 2 °C WITH THE MAXIMUM RATED APPLICABLE STEADY STATE CURRENT APPLIED. AFTER THE STORAGE PERIOD. TO AND STABILIZED AT ROOM TEMP.	MAXIMUM RESISTANCE CHANGE : ± 15% OF INITIAL
TEMPERATURE CYCLE	THERMISTOR SHALL BE SUBJECTED TO THE FOLLOWING 10 CYCLES : AT -40±3 °C FOR 30 MINUTES AND AT +150±2 °C FOR 30 MINUTES. AFTER THE CYCLES. THE THERMISTOR SHALL BE RETURNED TO AND STABILIZED AT ROOM AMBIENT TEMP.	MAXIMUM RESISTANCE CHANGE : ± 15% OF INITIAL, AND THERE SHALL BE NO EVIDENCE OF HARMFUL CORROSION, MECHANICAL
MOISTURE RESISTANCE	THERMISTOR SHALL BE STORED FOR 1,000 ±12 HOURS AT 40±2 °C, 90-95% RH WITH NO CURRENT APPLIED. AFTER THE STORAGE PERIOD THE THERMISTOR SHALL BE RETURNED TO AND STABILIZED AT ROOM TEMP.	MAXIMUM RESISTANCE CHANGE : ± 15% OF INITIAL.
LEAD FULL STRENGTH	AFTER GRADUALLY APPLYING THE 1Kg LOAD AND KEEPING THE UNIT FIXED FOR 10 SECONDS IN THE AXIAL DIRECTION. THE LEAD SHALL BE VISUALLY EXAMINED FOR ANY DAMAGE	NO OUTSTANDING DAMAGE.
SOLDERING HEAT RESISTANCE	THE LEAD WIRE OF THE THERMISTOR SHALL BE DIPPED WITH 4±1mm SPACE OF 300± 5 °C FOR 3 SEC, RETURNED TO AND STABILIZED AT ROOM TEMP.	MAXIMUM RESISTANCE CHANGE : ± 15% OF INITIAL.


TYPICAL R-T CURVE FOR DSC SERIES (NTC)

MODEL NO. DSC - 20D - 22
B VALUE 3,200 K

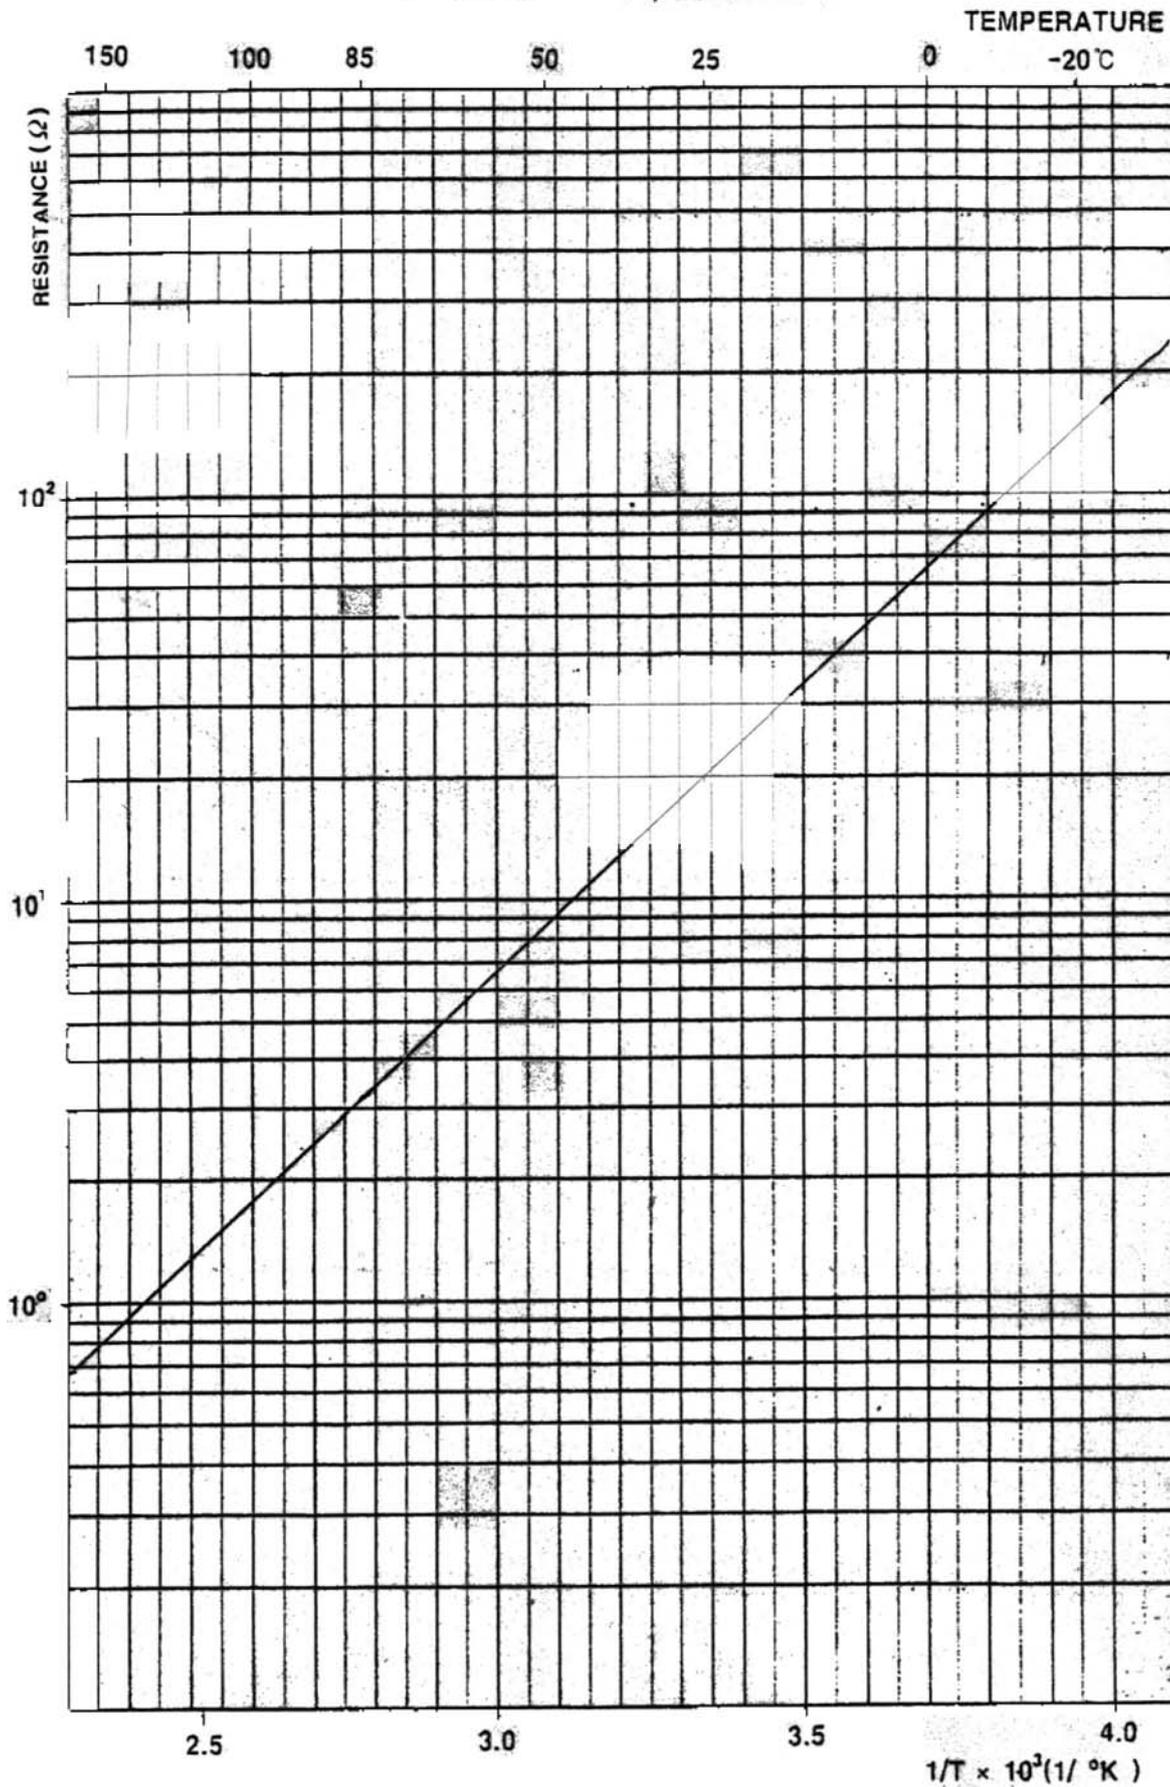

TYPICAL V-I CURVE FOR DSC SERIES

MODEL NO. : DSC - 20D - 22

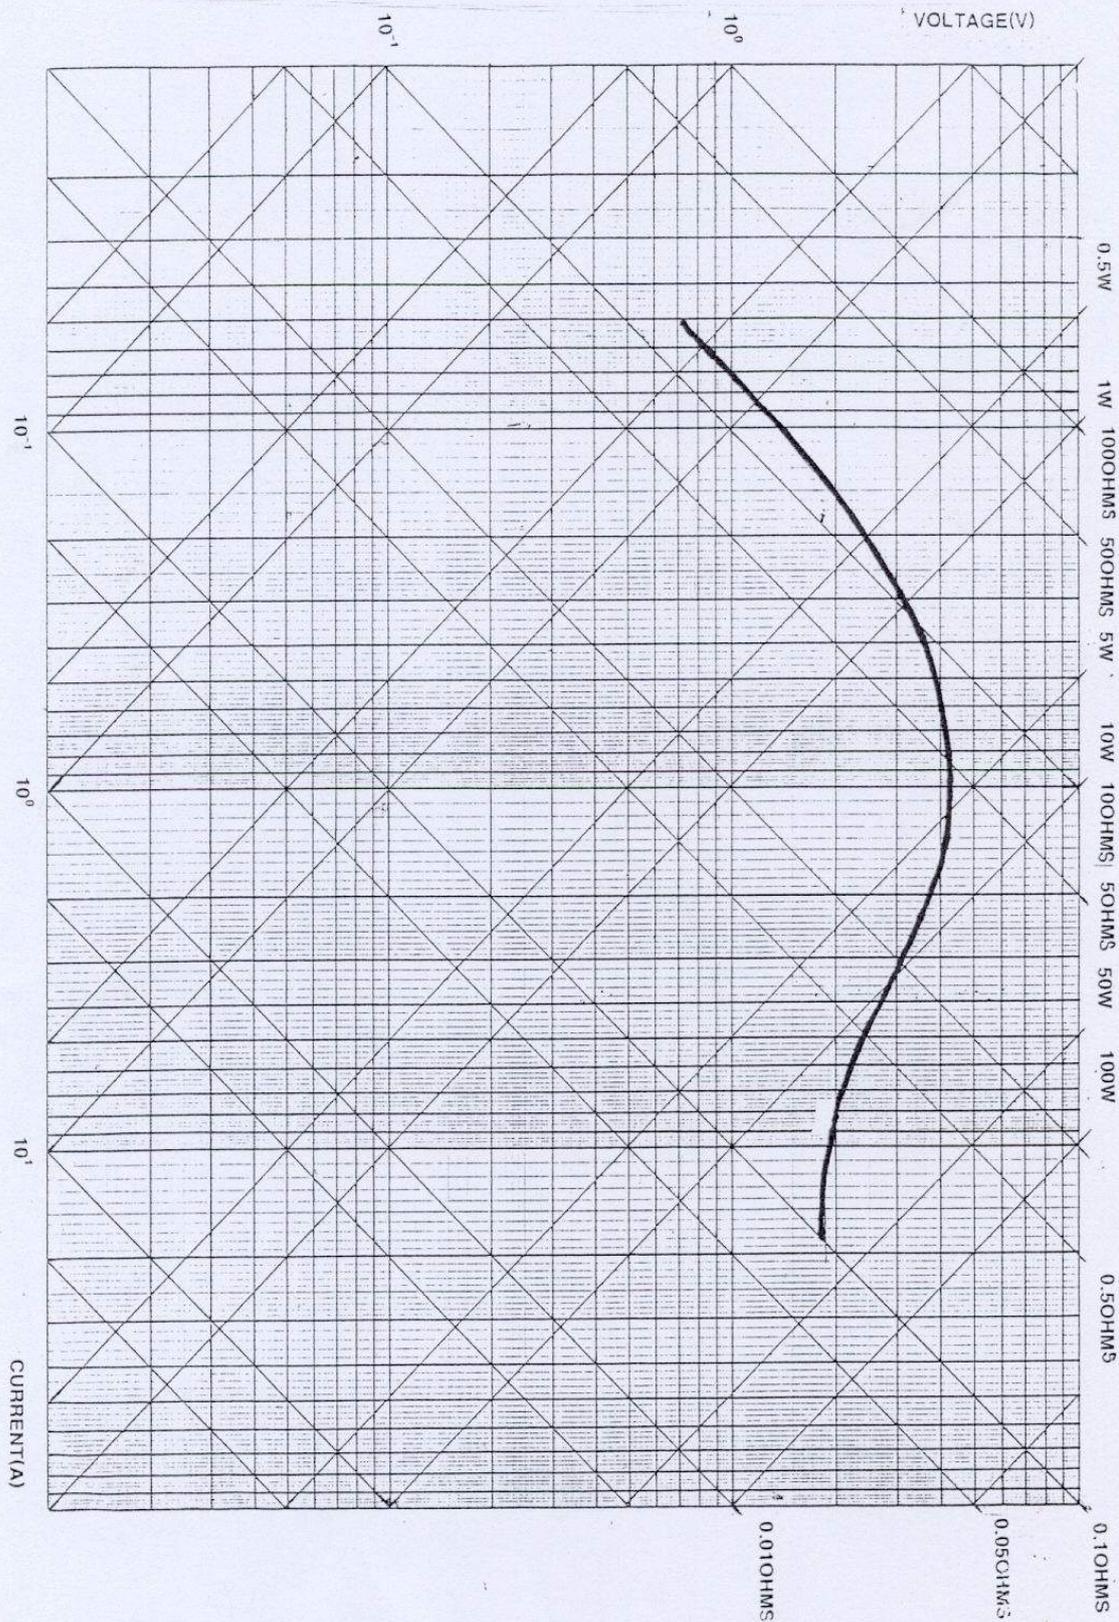


PACKING SHAPE

(Unit : mm)

1. INNER PACKING BOX


22/30 ϕ : 200pcs/vinyl pack \times 5pack = 1,000pcs/ inner box

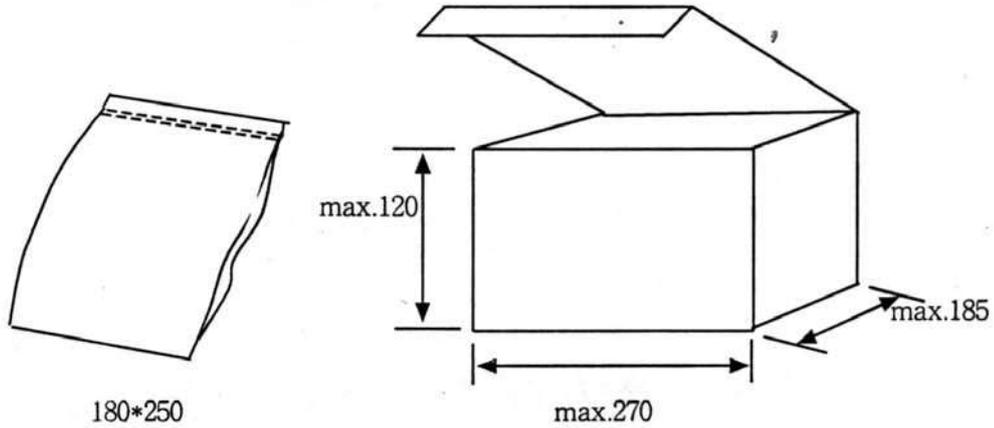

2. OUT PACKING BOX (INNER BOX 2 & 4EA)

* - 1,000pcs * 2ea = 2,000pcs

4ea = 4,000pcs

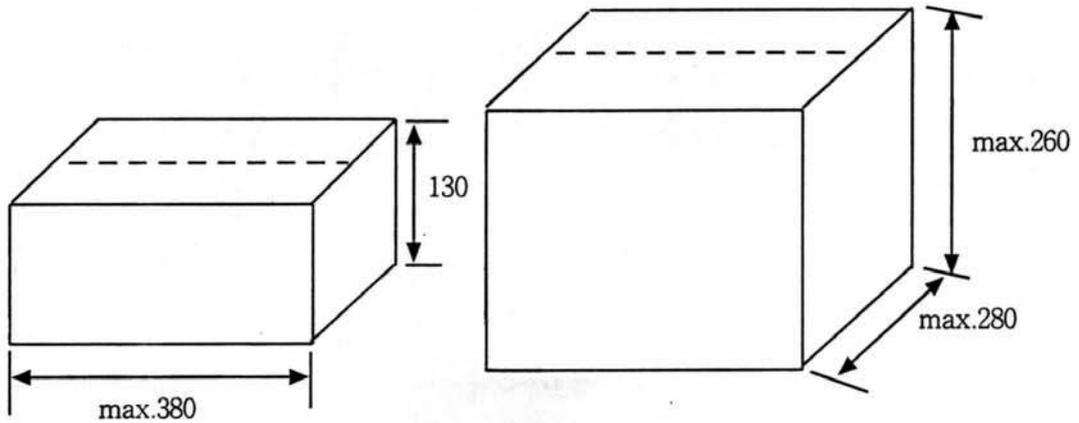

in case of 5,000/10,000pcs out box

in case of 10,000/20,000pcs out box