



Audio Feast


Premium Audio Components
Music City USA Nashville TN

ES9018 DAC Direct output Transformer

Input connection:

- 0 AOUTRN or AOUTLN (analogue out positive)
- 1 AOUTRP or AOUTLP (analogue out negative)
- CT not used

The Core Ground wire needs to be soldered to the shield case

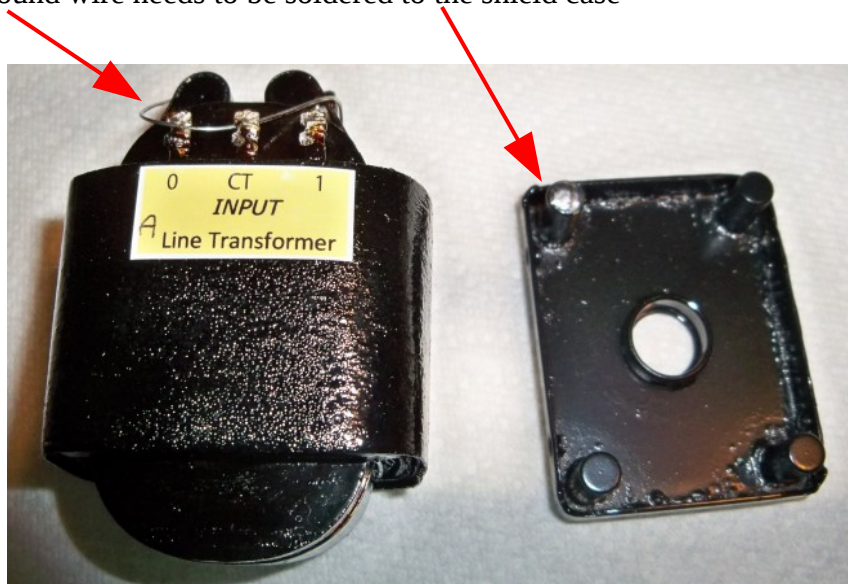

Output connection:

Unbalanced

0 GND

1 Hot

CT not used

Balanced

0 Negative

1 Positive

CT GND



Set up:

Sound characteristics change dramatically based on 2ndary load impedance. Our recommended total 2ndary load is 2.1KOhm. @2.1Kohm, we can experience the best 3 dimensional image, wide sound stage, and ambiance.

Your taste and sound system may not exactly same as ours. We strongly recommend you to use 10K to 100K potentiometer for finding sweet spot for you. Once you find your sweet spot, you should replace the potentiometer with your choice of fixed value resistors.

