



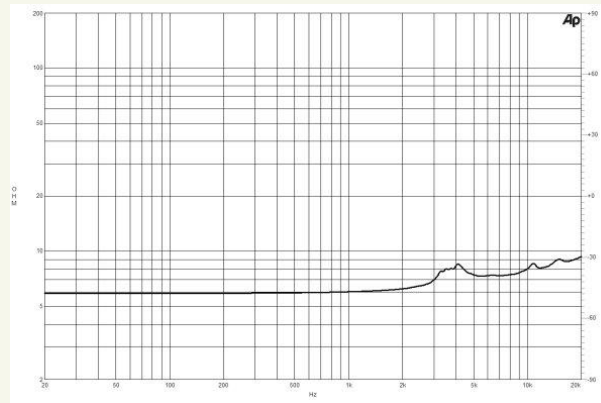

DE35

Tweeter

50 W continuous program power capacity
3500 – 18000 Hz response
108 dB sensitivity
Neodymium magnet assembly

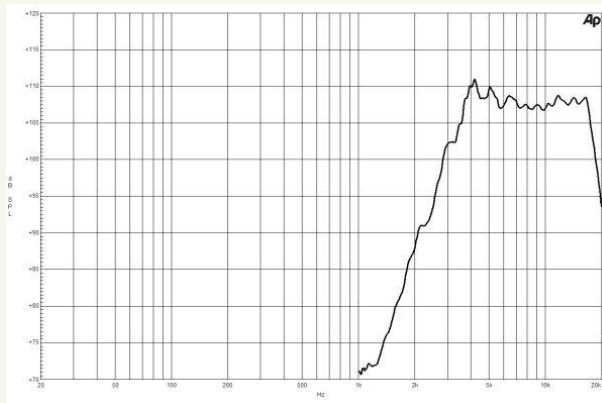

Specifications

| | |
|-------------------------------|-----------------|
| Nominal Impedance | 8 ohm |
| Minimum Impedance | 7 ohm |
| Nominal Power Handling (1) | 25 W |
| Continuous Power Handling (2) | 50 W |
| Sensitivity (1W/1m) (3) | 108 dB |
| Frequency Range | 3.5 - 18 kHz |
| Recommended Crossover (4) | 5 kHz |
| Voice Coil Diameter | 32 mm (1.25 in) |
| Winding Material | Aluminium |
| Inductance | 0.1 mH |
| Diaphragm Material | Mylar |
| Flux Density | 1.3 T |

Mounting and Shipping Info

Three M4 holes 120° on 91 mm
(3.6 in) diameter

| | |
|---------------------------|------------------------------------|
| Overall Diameter | 100 mm (4 in) |
| Depth | 46 mm (1.8 in) |
| Net Weight (1 unit) | 0.7 kg (1.5 lb) |
| Shipping Weight (8 units) | 6.1 kg (13.4 lb) |
| Shipping Box (8 units) | 220x220x150 mm (8.7x8.7x5.9 in) |

¹2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.

²Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

³Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

⁴12 dB/oct. or higher slope high-pass filter.

Horns
HF Drivers
Coaxials
LF Nd Drivers
LF Drivers



