



M 25 WP 03 04 # 3127-0125

Tieftöner / Woofer

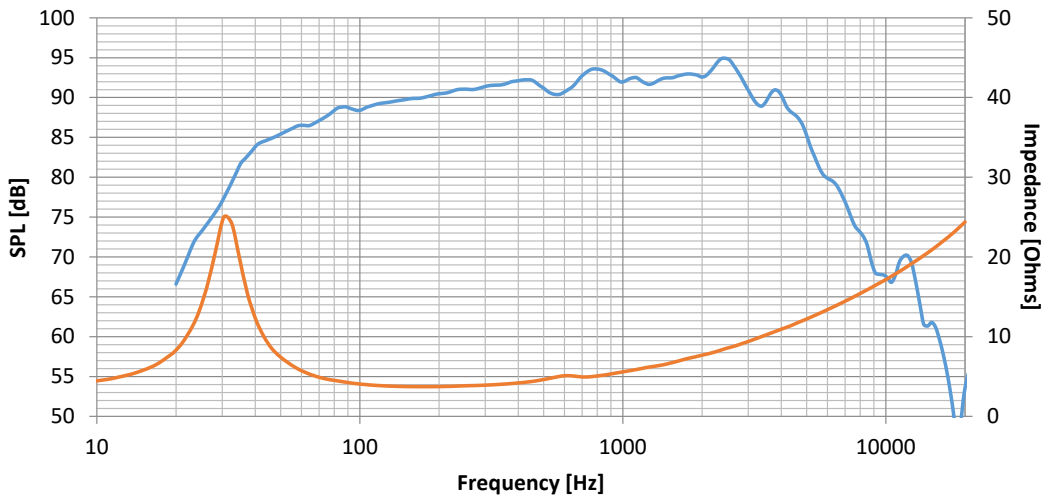

Frequency response measured in a 60l closed cabinet, input 2.83V, microphone distance 0.5m, normalized to SPL 1m. Impedance response measured in free air.

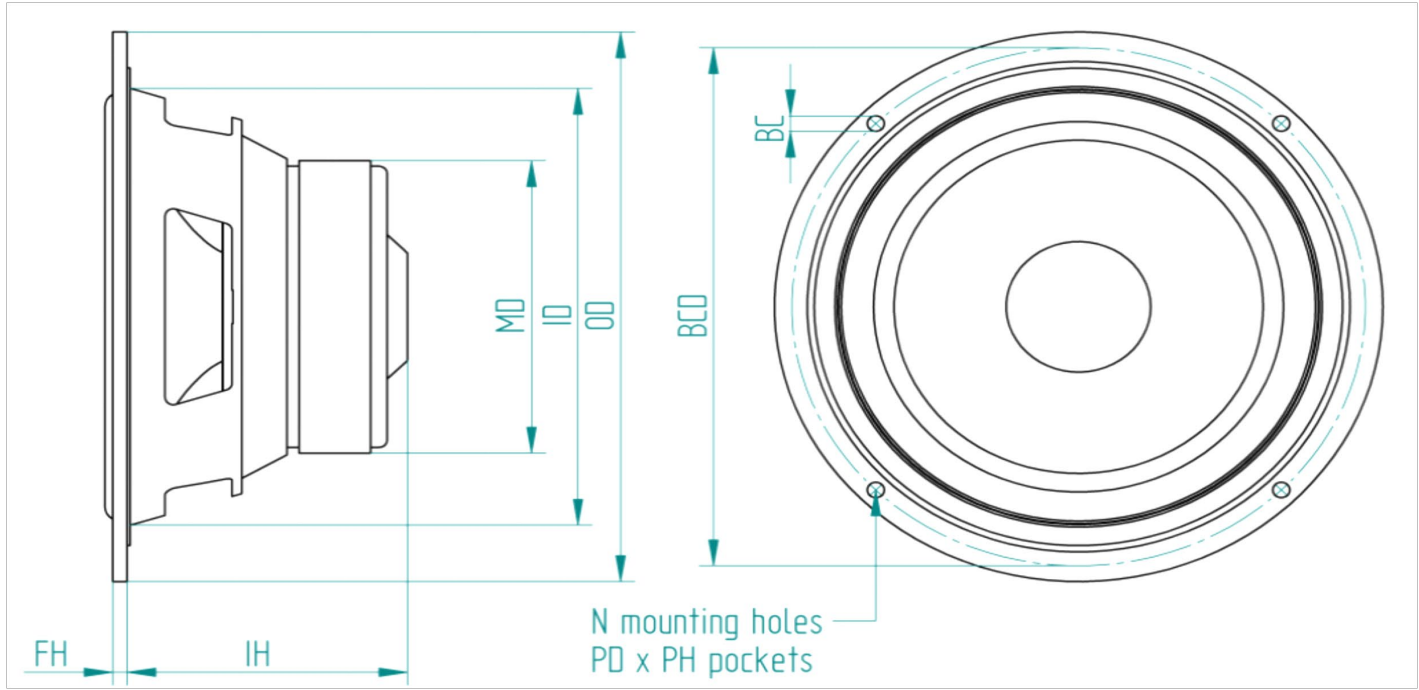

Specifications

Nominal Impedance	4 Ohms	VC resistance	3,5 Ohms
Frequency range	31 - 1000 Hz	VC Inductance	0,89 mH
Power Handling	80 W	BxL	6,84 N/A
Max. Power Handling	160 W	Free Air Resonance	31 Hz
Sensitivity (2.83V / 1m)	90 dB SPL	Moving Mass	39,3 g
Voice coil diameter	40,0 mm	Eff. Piston Area	346 cm ²
Voice coil height	18,0 mm	VAS	112,8 l
Air gap height	6,0 mm	Qms	4,69
Total weight	2,60 kg	Qes	0,57
		Qts	0,51

Dimensions

OD	262,0 mm
ID	232,0 mm
MD	121,0 mm
FH	4,6 mm
IH	93,0 mm
N	8
BD	4,8 mm
PD	-
PH	-
BCD	253,0 mm