

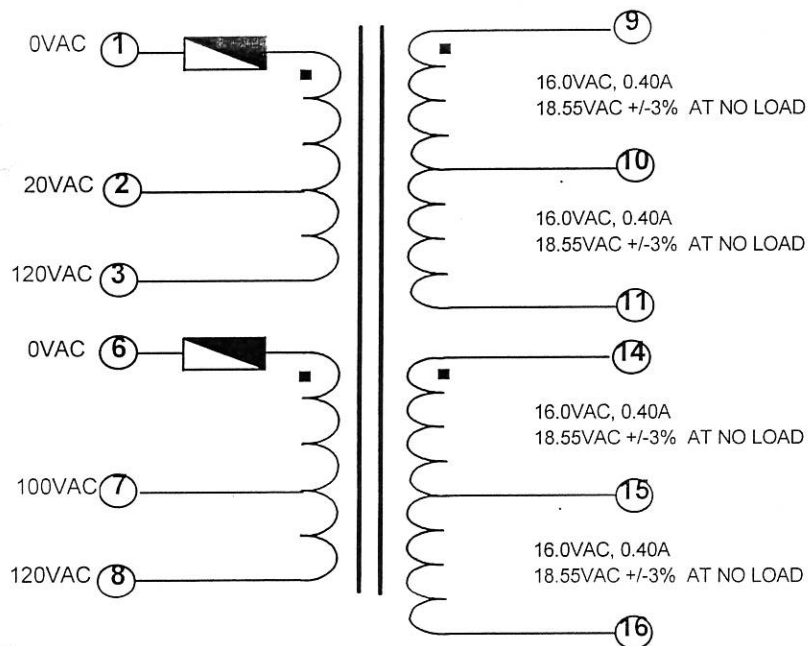


|                   |            |
|-------------------|------------|
| CUSTOMER PART NO: | 290108     |
| PLITRON PART NO:  | 5668-B2-00 |
| POWER:            | 25VA       |
| TEMPERATURE RISE: | 21.20°C    |
| EFFICIENCY:       | 85.05%     |
| CORE LOSS:        | 0.28W      |
| COPPER LOSS:      | 3.55W      |
| WEIGHT:           | 0.66kg     |

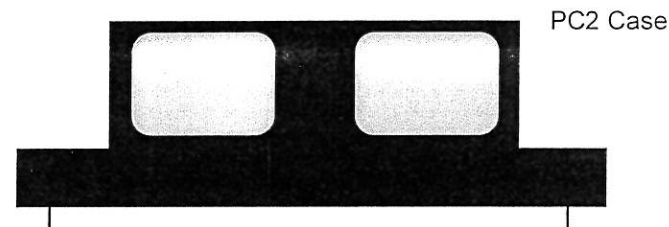

#### NOTES:

1. ULC Recognised to UL506, UL1411 and CSA 22.2 No.66-1988 (Class A 105°C).
2. Materials and construction is verified by CSA File no. LR84566-9 to IEC (EN60065).
3. Thermal resetting switches 105°C N.C., one in series with each primary.
4. Potted into PC2 case.

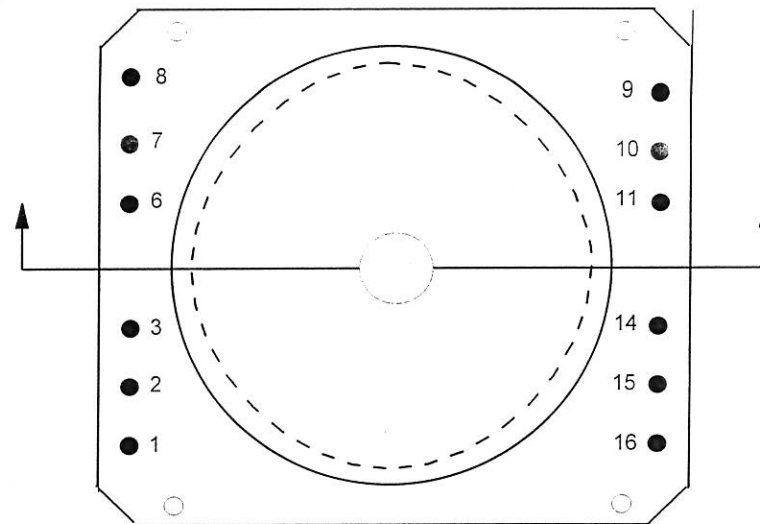

#### LABEL INFO:

PLITRON MANUFACTURING INC.  
5668-B2-00 DATE CODE F: 50  
INPUT:(0-20-120 0-100-120 VAC)



|              |   |       |         |
|--------------|---|-------|---------|
| DESIGN BY:   |   | DATE: |         |
| DRAWN BY:    | h | DATE: | 5/28/98 |
| CHECKED BY:  |   | DATE: |         |
| APPROVED BY: |   | DATE: |         |

| TOROIDAL POWER TRANSFORMER      |        |
|---------------------------------|--------|
| 25VA, 2 x 120VAC INPUT, 50Hz    |        |
| PLITRON PART NUMBER: 5668-B2-00 | REV:00 |
| SCALE: NONE                     |        |
| SHEET 1 OF 1                    |        |