**Mounting and Shipping Information**

Blot Circle Diameter 249/9.8-8*6.5 mm/inch

Overall Diameter 265/10 mm/inch


Baffle Cutout Diameter 234/9.2 mm/inch

Depth 132/5.2 mm/inch

Flang and Gasket Tickness 12/0.47 mm/inch

Shipping BOX 28*28*17/1pc CM

Shipping Weight 7 Kg/ 1 pc

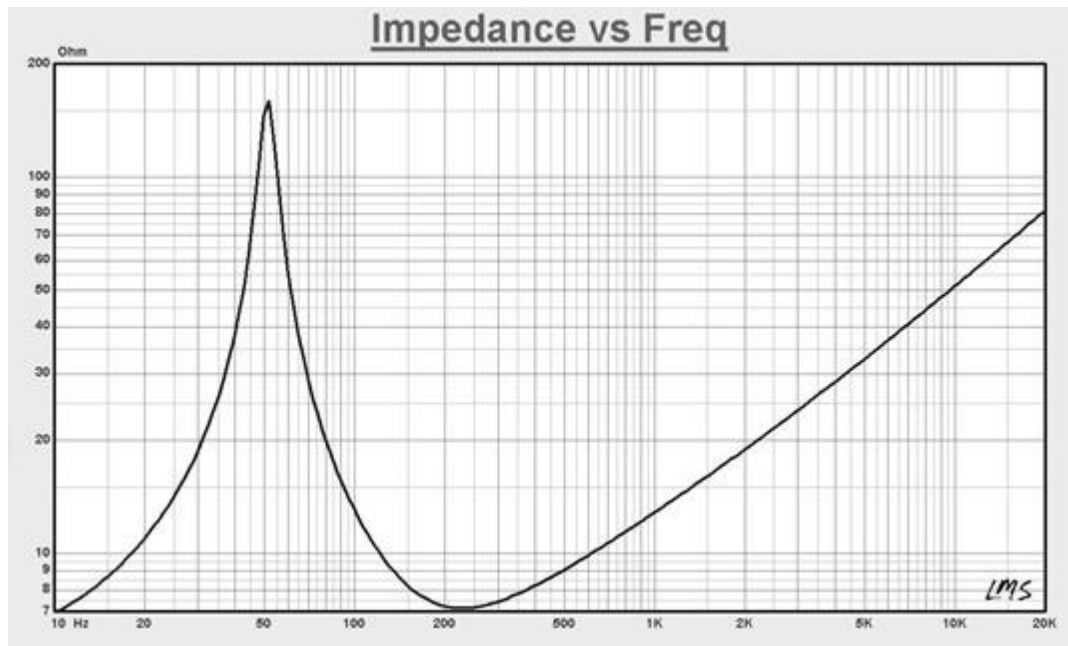

Features

- *600W continuous program power capacity.
- *65.5 mm CCAW voice coil.
- *54.5-3500Hz response.
- *95.3dB Sensitivity.

Thiele&Small Parameters

Fs 53.5Hz
Re 5.6Ω
Qes 0.377
Qms 10.852
Qts 0.364
Vas 51.5 L
Xmax* 17mm
Mms 33.8 gr
Le 1.568 mH
Cms mm/N
Rms kg/S
Eta Zero 2.152 %

Electrical Specifications

- *Nominal Impedance 8 Ohm
- *Minimum Impedance 6.6Ohm
- *Nominal Power Handling *** 300 W
- *Maximum Power Handling ***** 600 W
- *Sensitivity (1W/1m) 95.3dB
- *Frequency Range 54.5-3500 Hz
- *Voice Coil Diameter 65.5mm
- *Winding Material CCAW
- *Former Material Til
- *Winding Depth 16mm
- *Magnetic Gap Depth 8mm
- *Flux Density 1.2 T