


PROHIBITION NOTE
THIS DRAWING CONTAINS INFORMATION
THAT IS PROPRIETARY TO LUCI
INTERGATED POWER, TECH. AND
SHOULD NOT BE USED OR REPRODUCED
WITHOUT WRITTEN PERMISSION

COMPONENT	VALUE CHART	
	TAP 006	TAP 007
R20	2.32 K	1.5 K
R8	4.32 K	3.01 K

REVISIONS			
ZONE	SDN	LN	DESCRIPTION
---	A	---	PROTOTYPE
---	B	---	SEE FCN
---	C	---	SEP ECN
---	D	---	R24 FROM RLCF1 TO A5,24
---	E	---	ADDED R8 TO CHART R8 REMOVED VALUE ADDED ADDED WHERE NEEDED

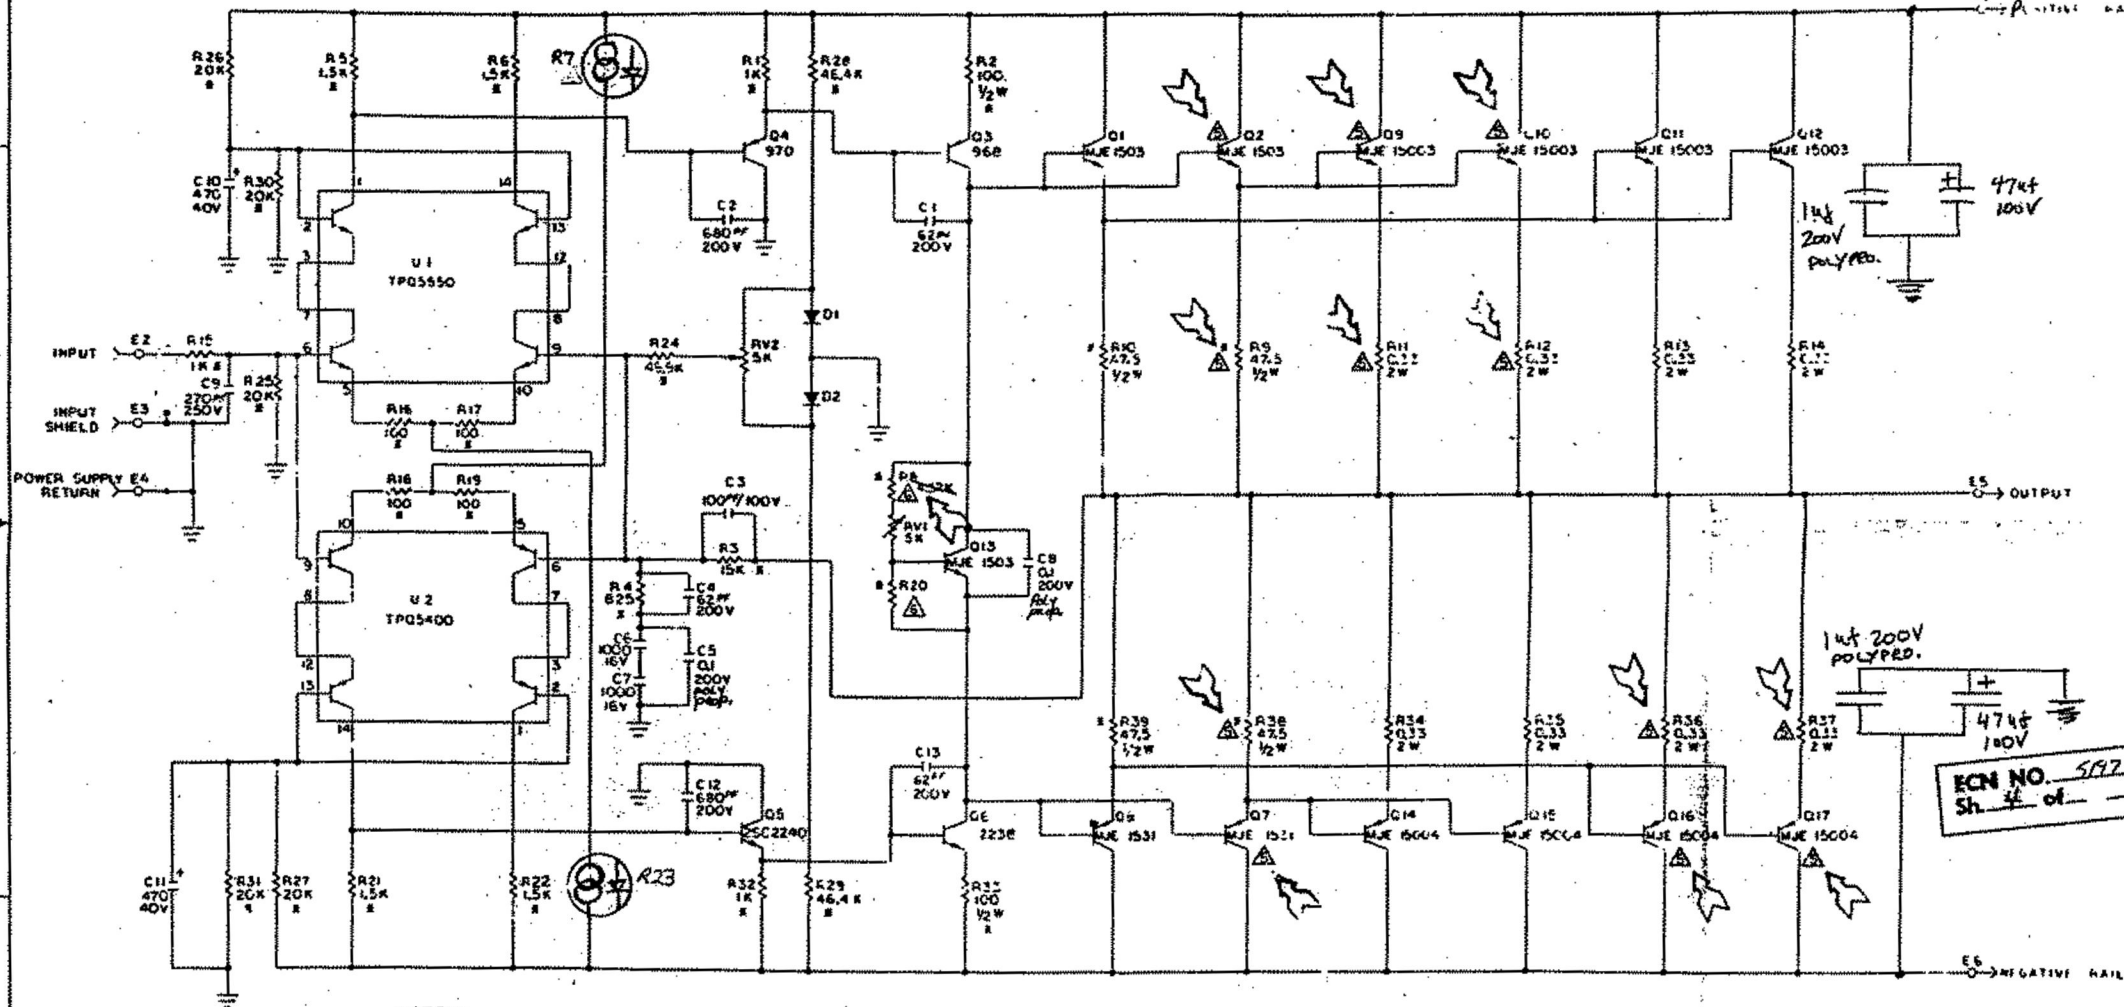

NOTES:

- UNLESS OTHER SPECIFIED:
ALL RESISTORS ARE 1/4W, 5% CF
SMALL RESISTANCE IS IN OHMS
ALL DIODES ARE 1N4148
DIAL CAPACITANCE IS IN MICROFARADS
- 2.4 INDICATES 1/4W, 1% RESISTORS
- 3.4 INDICATES POLYPROP CAPACITORS
- THERE ARE NO FOURWAY TIES

△ THESE COMPONENTS ARE NOT USED ON TAP006(100W)

△ FOR VALUES SEE CHART

HIGHEST REFERENCE DESIGNATIONS									
C	D	H	E	O	U	R	V		
13	2	39	6	17	2	2			
REFERENCE DESIGNATIONS NOT USED									

APPROVALS	
SIGNATURE	DATE
CAG	11/25/97
DESIGN	11/25/97
TEST	11/25/97
RELEASE	11/25/97

4004-2004	
SCHEMATIC DRIVER / OUTPUT	
REV D	095D074-00
TAP 006/007	