
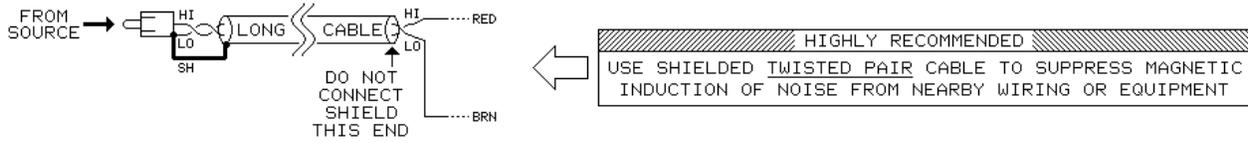


JT-11P-1 UNBALANCED AUTOMOTIVE or CONSUMER APPLICATION

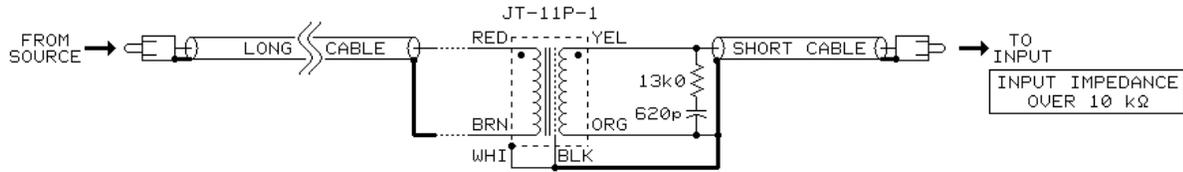

NOTES

1. CASE OF TRANSFORMER MUST BE INSULATED FROM FRAME OF VEHICLE OR ANY OTHER GROUND FOR BEST NOISE REJECTION.
2. THE TRANSFORMER MUST BE LOCATED NEAR THE DEVICE INPUT! IF THE TOTAL DISTANCE IS OVER 4 FEET, THE LONGER CABLE MUST BE BETWEEN SIGNAL SOURCE AND TRANSFORMER. WE RECOMMEND NO MORE THAN 2 FEET OF CABLE BETWEEN THE TRANSFORMER AND THE DESTINATION DEVICE INPUT.
3. A PAIR OF JT-11P-1 TRANSFORMERS ASSEMBLED AS ABOVE IN A STURDY STEEL BOX WITH GOLD PLATED IHF/RCA INPUT AND OUTPUT JACKS IS AVAILABLE FROM JENSEN AS ISO-MAX® MODEL CI-2RR.

jensen	AS001
	09/13/95
7135 HAYVENHURST AVE. VAN NUYS, CALIFORNIA 91406 (818) 374-5857	