

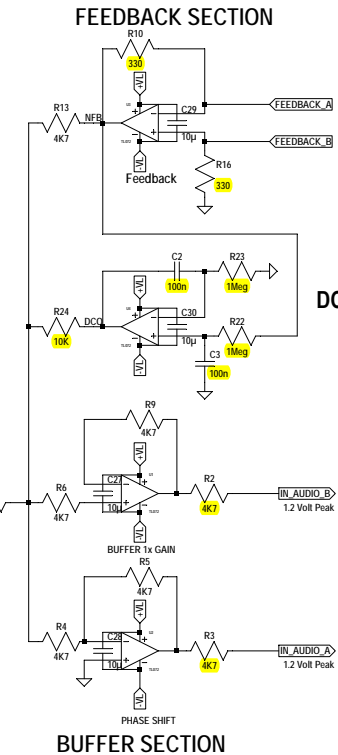


Note:
Triangle wave output must be checked prior
installing mosfets. Set VR2 to obtain triangle
speed at 250kHz.
This test requires Main supply to be installed.

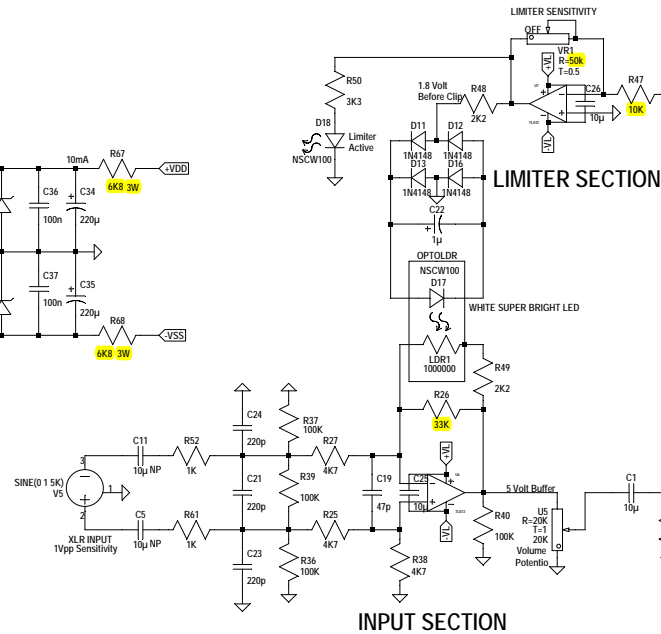

BD_JAVA - Class BD Amplifier Ver.2 FINAL
Kartino Surodipo - Copyright 2019
ATTENTION: NOT FOR SALE UNLESS PERMITTED!
Contact: kartino.id@gmail.com
Indonesian - Class D Next Generation Facebook Group

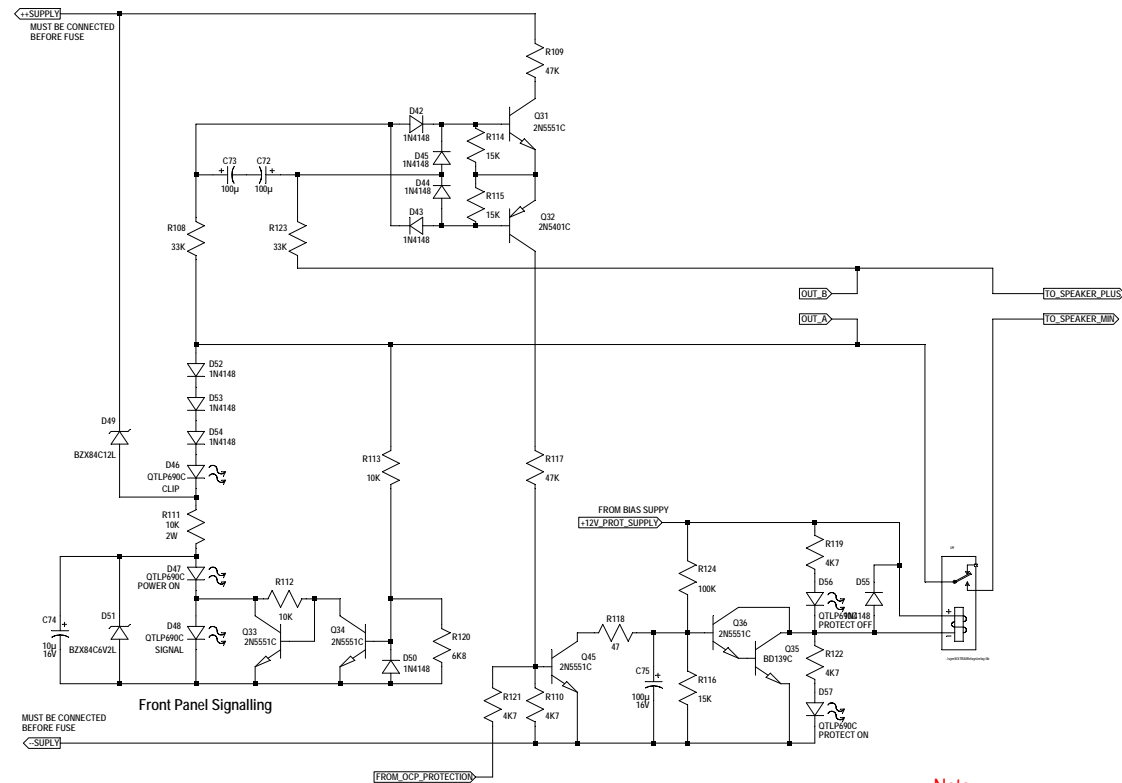

DC PROTECTION AND FRONT PANEL

BD_JAVA - Class D Amplifier Ver.2 FINAL
 Kartino Surodipo - Copyright 2019
 ATTENTION: NOT FOR SALE UNLESS PERMITTED!
 Contact: kartino.id@gmail.com
 Indonesian - Class D Next Generation Facebook Group

Note:
 DC Protection must be tested prior installing mosfet. Apply resistor 10K from each output A then B to plus then minus supply. DCP must activate.
 This test requires Main supply and 12V bias supply installed.