


Level (1498:18499 Hz) = 104.70 dB SPL/watt (8 ohms, @1.50 meters)

EMINENCE BETA 12CX + DE25


7-1-83 10:38 PM

MLSSA: Frequency Domain

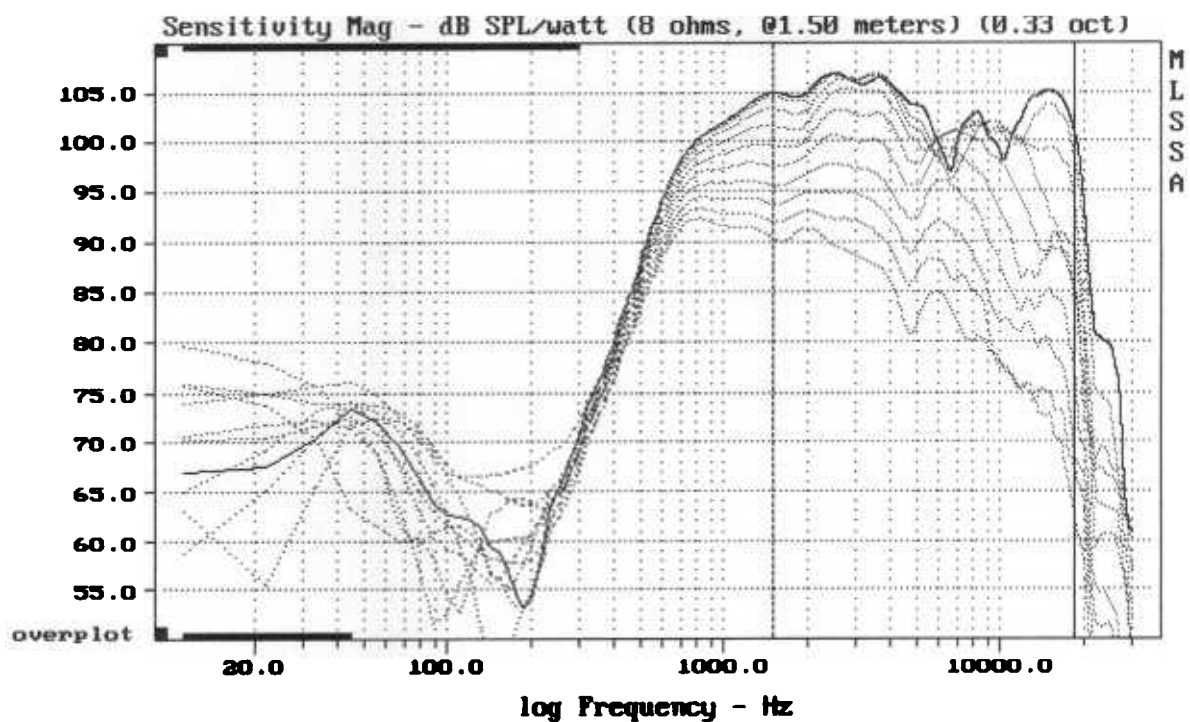

Overlay Compare: dev= +11/-13, std= 7.2, avg= -25

EMINENCE BETA 12CX + DE25

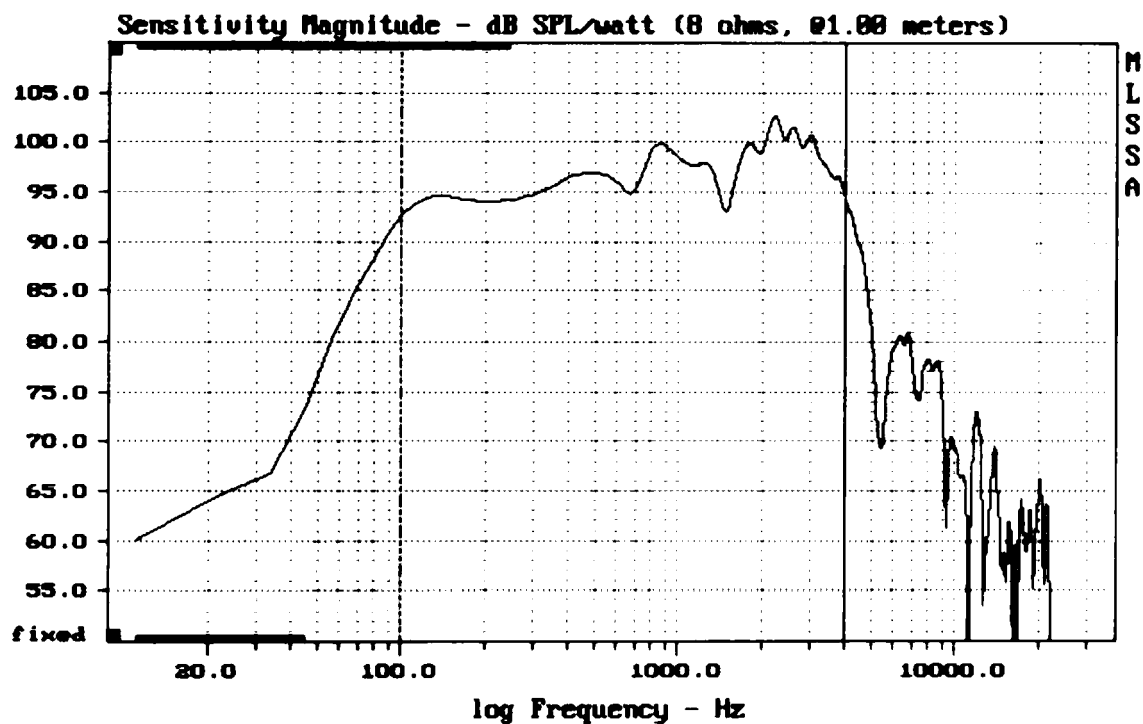


Level (100:3995 Hz) = 97.29 dB SPL/watt (8 ohms, @1.00 meters)

EMINENCE BETA 12CX + SELENIUM D210TI

7-1-83 9:01 PM

MLSSA: Frequency Domain

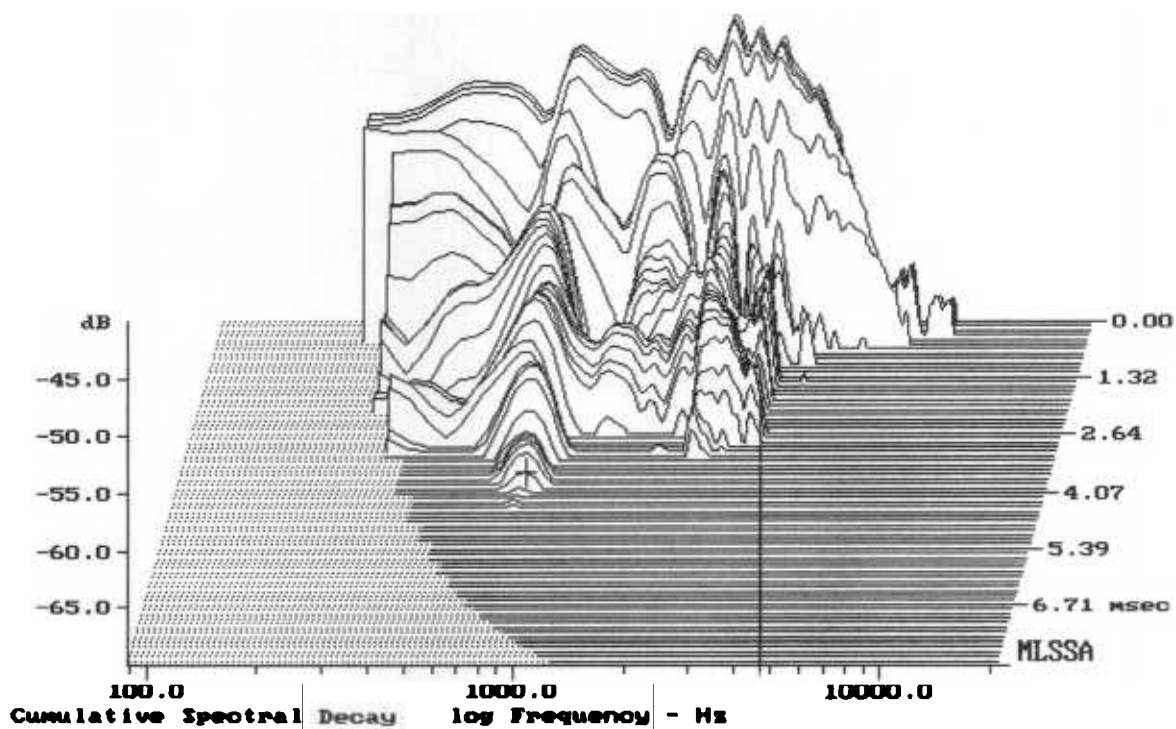

-68.51 dB, 799 Hz (10), 3.960 msec (37)

MLSSA SPO 4.0D #960903-3057-3075 for Jiri Komon
Measured Data QC Limits

Line	Parameter	Value	Units
1	RMSE-free	0.38	Ohms
2	Fs	42.51	Hz
3	Re	5.47	Ohms[dc]
4	Res	67.62	Ohms
5	Qms	6.44	
6	Qes	0.52	
7	Qts	0.48	
8	L1	0.54	mH
9	L2	1.14	mH
10	R2	6.52	Ohms
11	RMSE-load	0.52	Ohms
12	Vas(Sd)	152.96	liters
13	Mms	36.43	grams
14	Cms	385	$\mu\text{M}/\text{Newton}$
15	B1	10.11	Tesla-M
16	SPLref(Sd)	95.4	dB[Re]
17	Rub-index	0.01	

Method: Mass-loaded (40.00 grams)

Area (Sd): 532.00 sq cm


DCR mode: Measure (-0.08 ohms)

QC file: CLOSED

Analysis successful. Shift in Fs = -30.4% (-20% to -50% is recommended).

EMINENCE BETA 12CX

MLSSA: Parameters

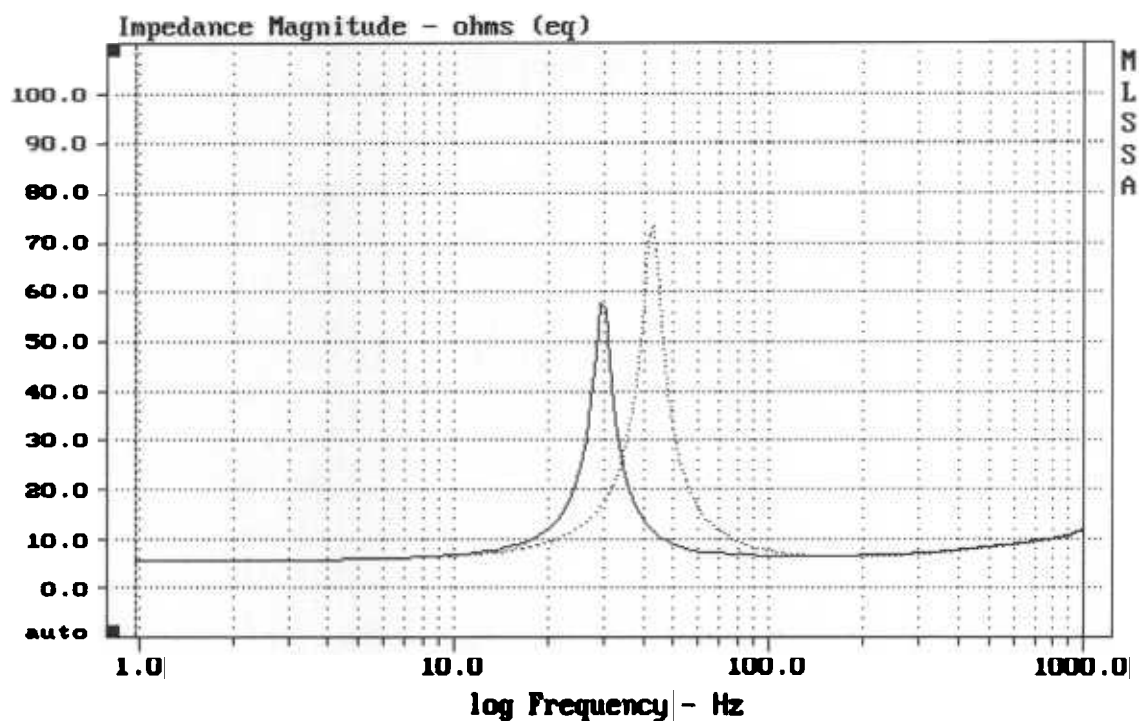

DTTO

7-1-83 8:48 PM

MLSSA: Frequency Domain