


Operation of the "S.D." switch (Source Direct Control)
 SW403h controls both RL401/RL402 (actually signal switch by volume control PCB) and the display LED therefore.
 SW403G makes a shortly switch-off of the loudspeaker Relais for DC protect for supression of any bumps created through the switching on or off of the Tone Defat

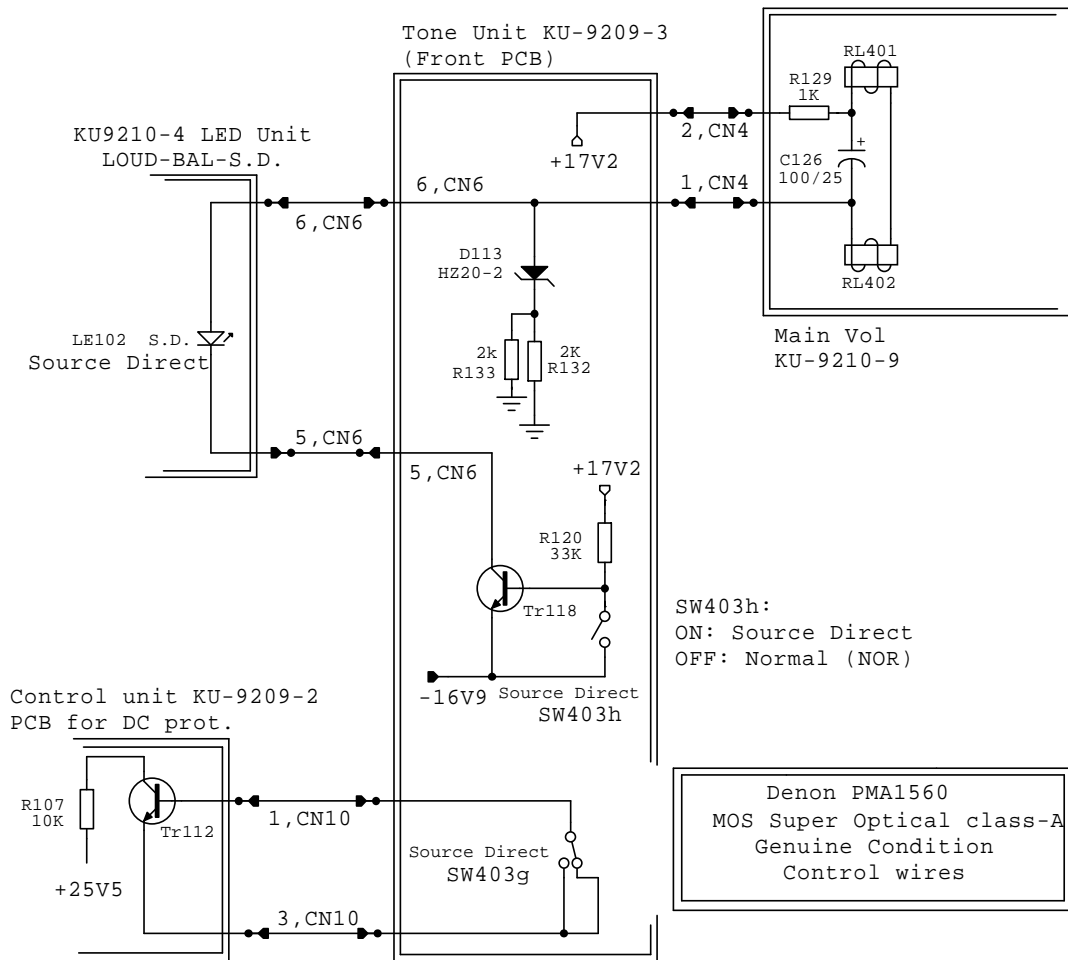

redraw by
www.tiefbassuebertragung.de

Denon PMA1560
 MOS Super Optical class-A
 Tone Defat Contr