


**FIGURE 1A:**

Tightly controlled impulse  
of 1 mfd  MultiCap.

Amperes  
(5A/DIV)

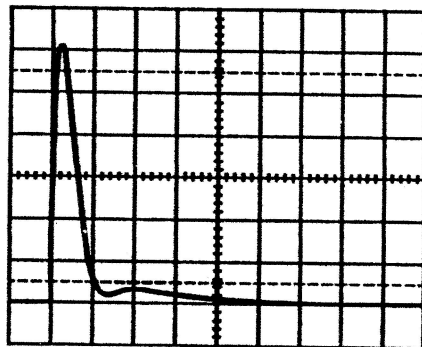


time (1 microsec/DIV)

**FIGURE 1B:**

Typically compressed and time-smeared im-  
pulse response of bi-polar electrolytic  
capacitor used in many speaker crossover  
networks.

Amperes  
(5A/DIV)

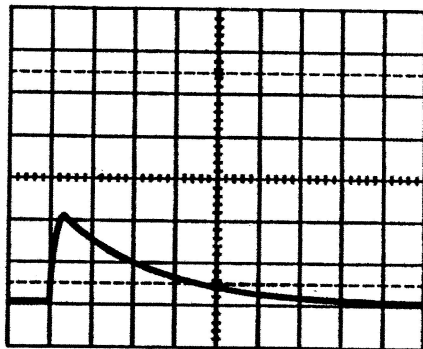

time (1 microsec/DIV)