


SPDIF modifications

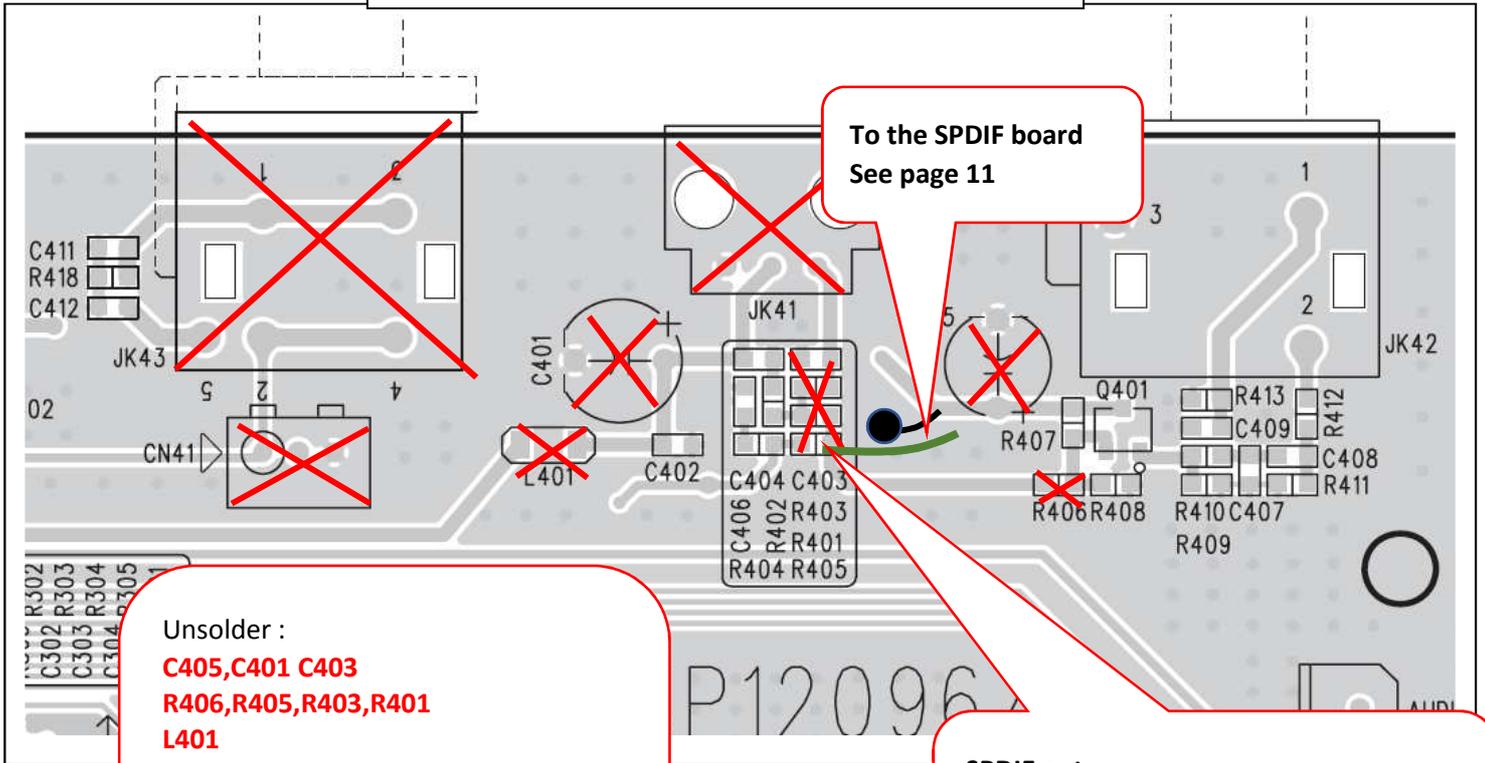


Unsolder :

- C405, C401 C403**
- R406, R405, R403, R401**
- L401**
- JK41**
- JK43**
- CN41**

JK42 is not used but not unsolder it.  
Allows fixing the main card on the back side

**SPDIF out :**

**Solder a wire on the two drills of R405.**  
**Another wire is directly soldered on the PCB (GND)**

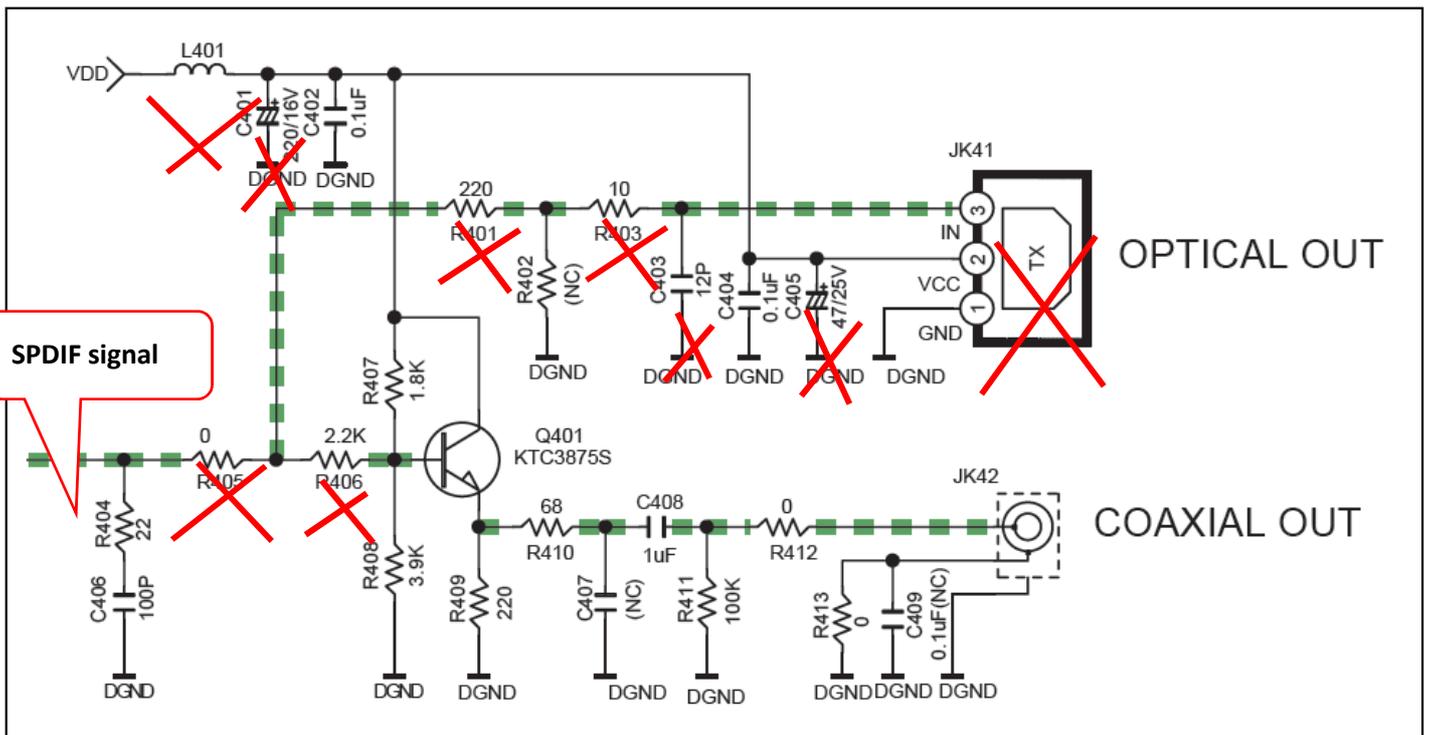

SPDIF signal


OPTICAL OUT

COAXIAL OUT

SPDIF modifications

To the Main board  
See page 10




SPDIF board

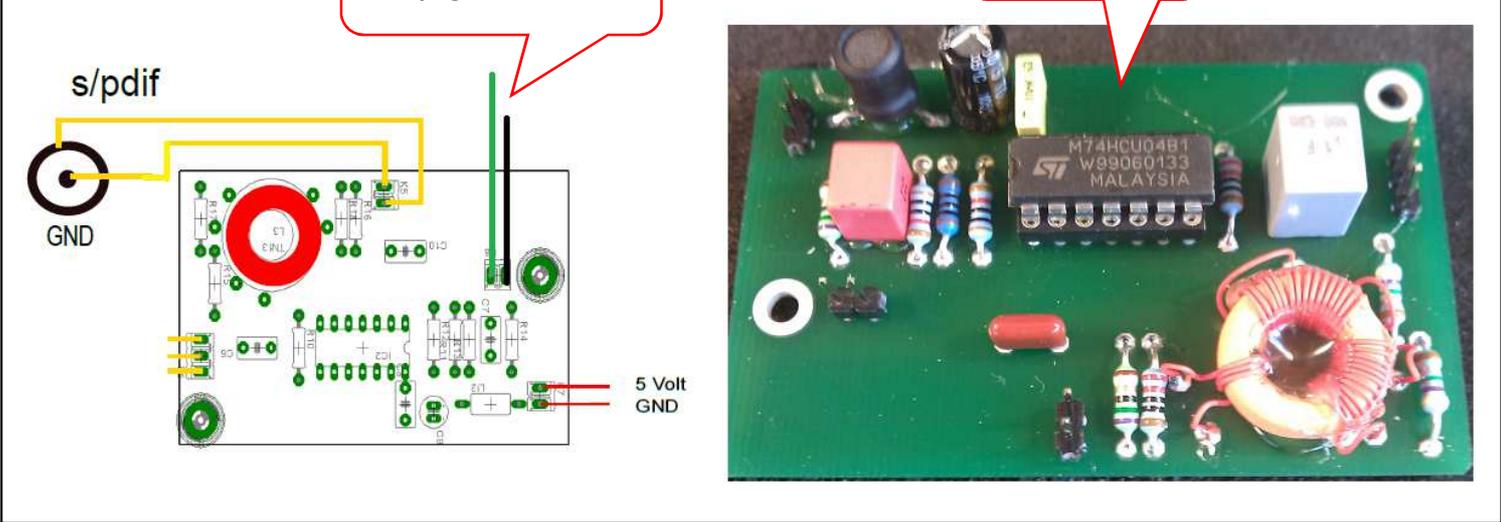

BNC 75Ohms



**3.3v main board modifications**

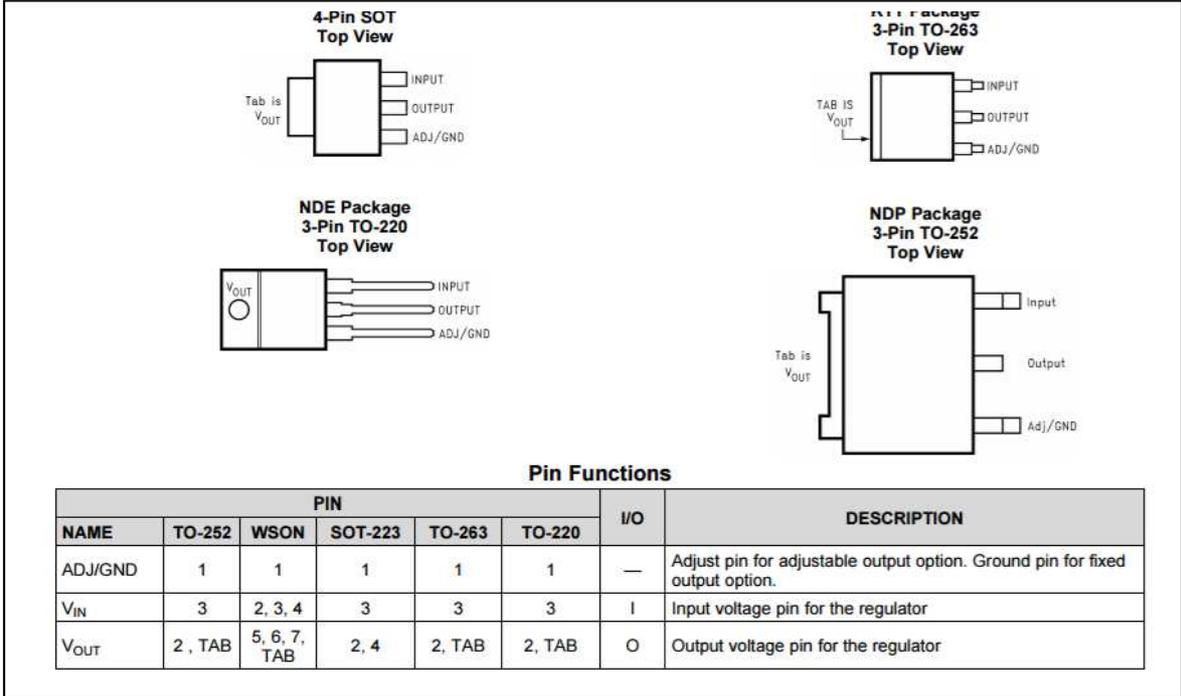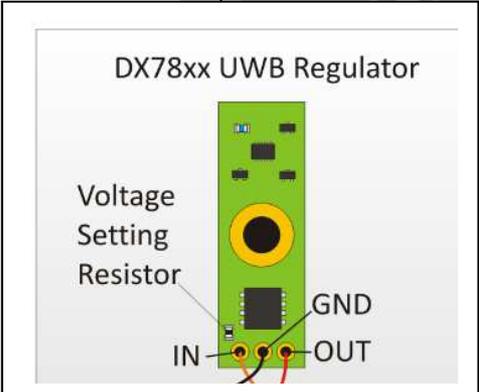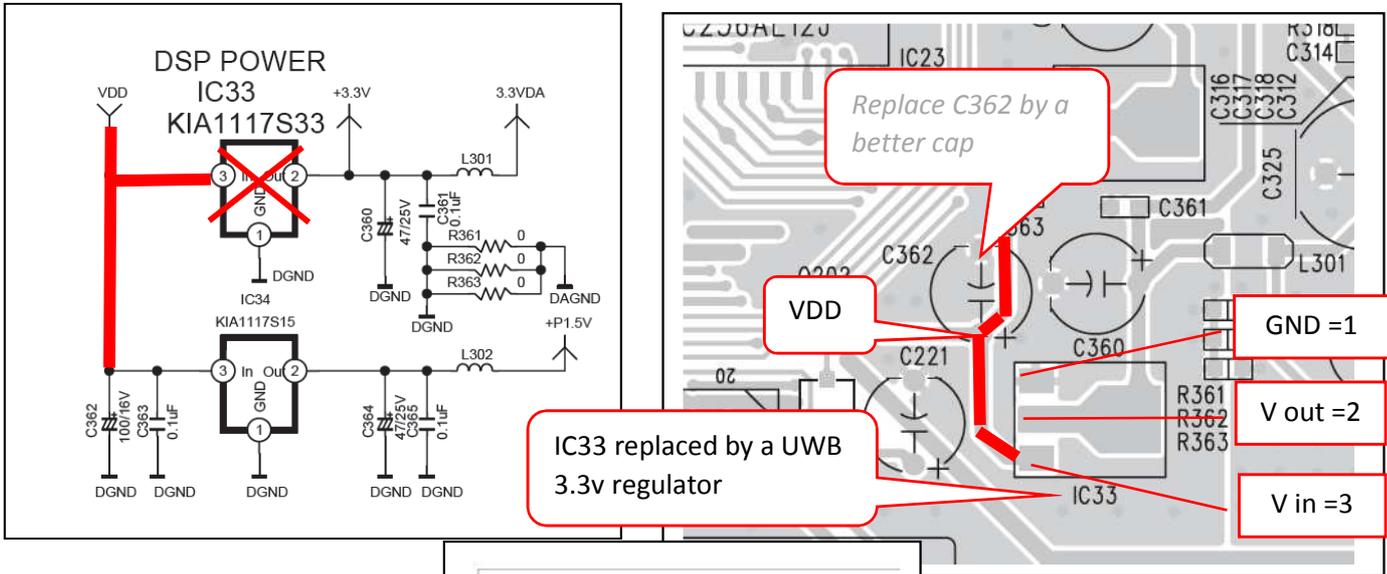

**5v VDD modifications**

