


VOLTAGE SELECTION	
24V STARTUP SWITCHED	X
24V STARTUP	X
24V RELAY	X
24V LOW ENERGY	X
24V CLOCK	X
24V OUT A	X
24V OUT B	X

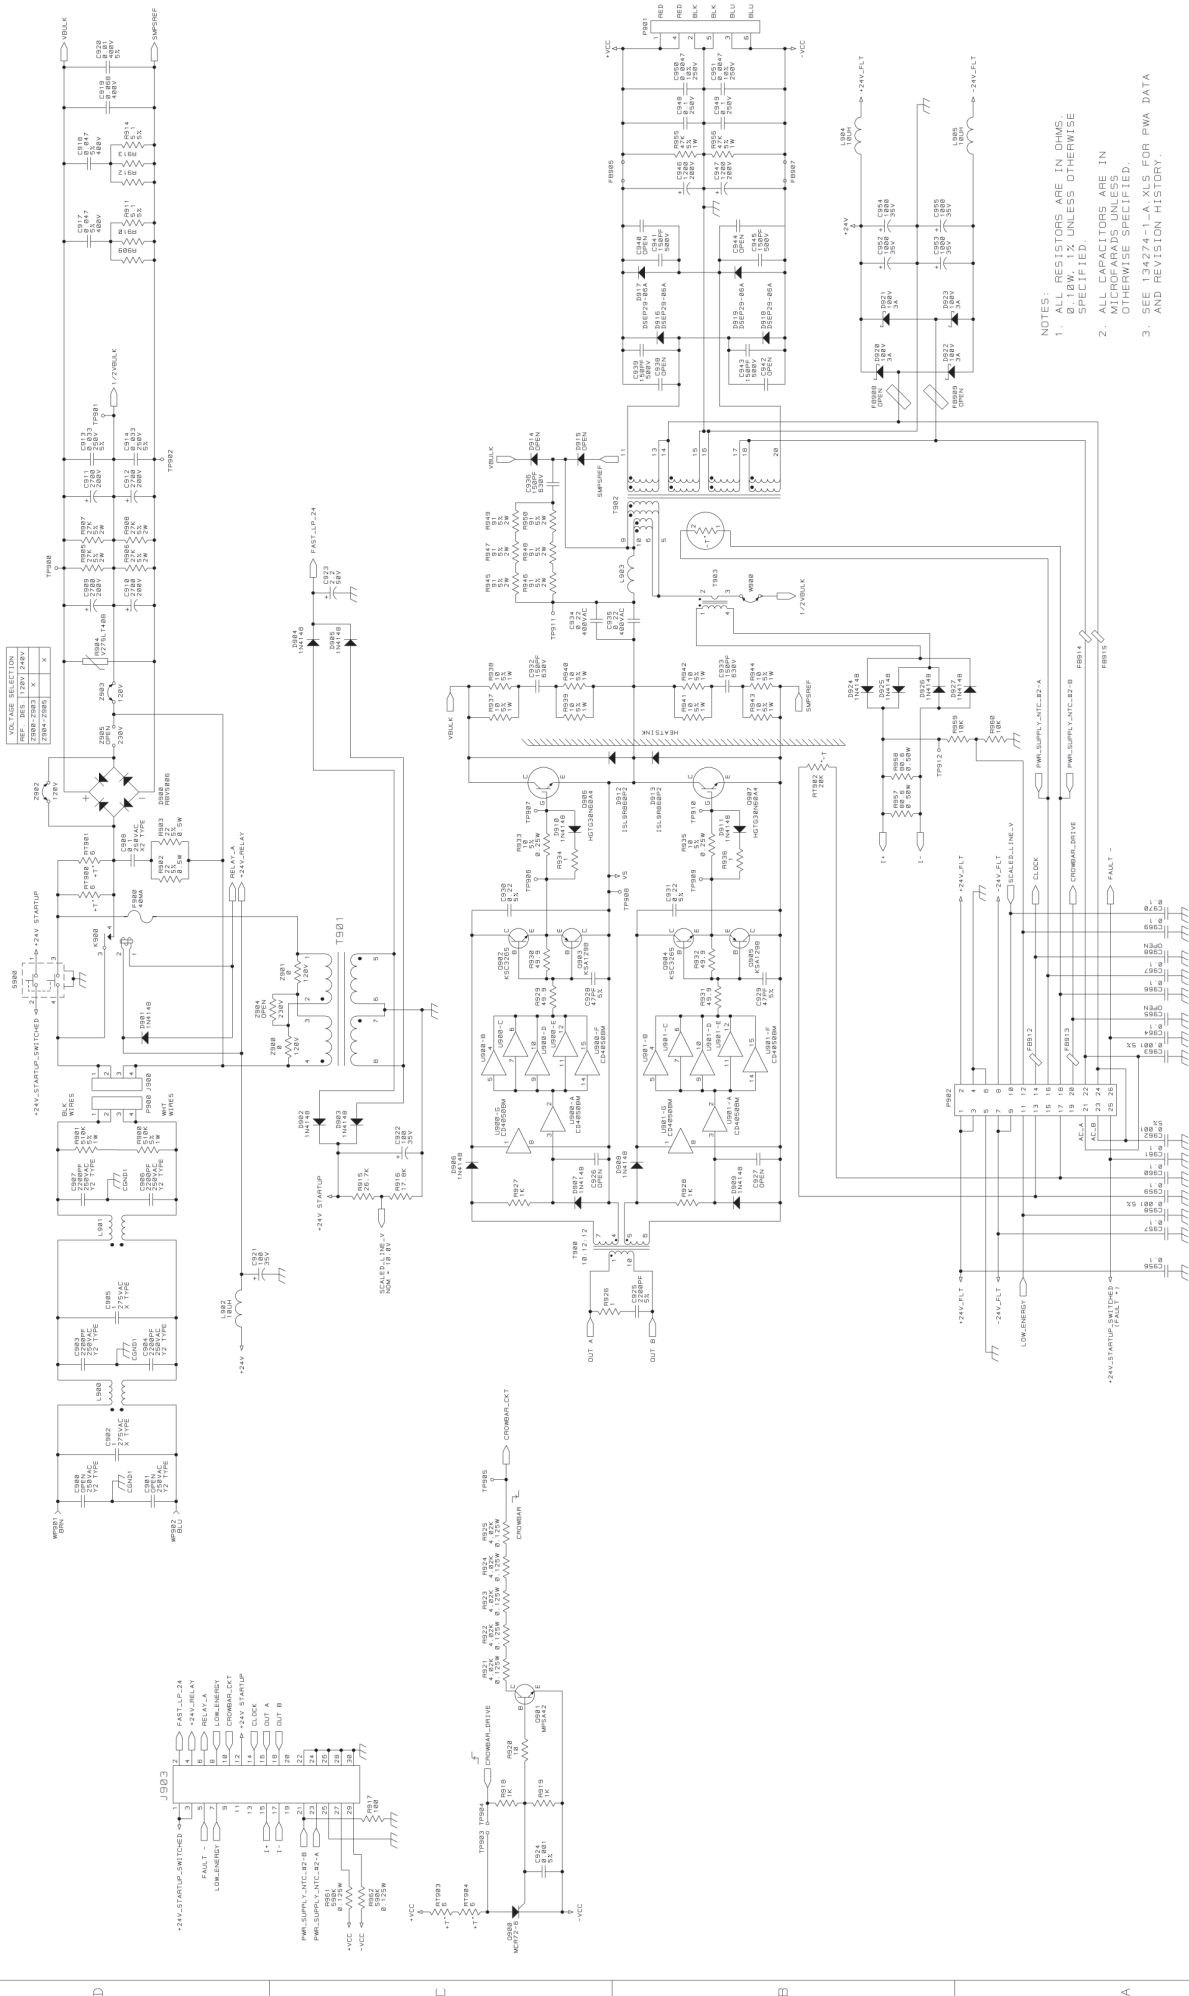

- NOTES:
1. ALL RESISTORS ARE IN OHMS SPECIFIED.
 2. ALL CAPACITORS ARE IN MICROFARADS UNLESS OTHERWISE SPECIFIED.
 3. SEE 134274-1-A.XLS FOR PWA DATA AND REVISION HISTORY.

SMPS MAIN

REV	SIZE	PWG NO	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF THE COMPANY. NO PART OF THESE DRAWINGS OR SPECIFICATIONS SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT PERMISSION OF THE COMPANY.
A	D	134274-1	
		SCALE	NONE
		PROJ NO	W043308
		SHEET	2 OF 2