



1 % MF:
+/- 1 %, 0.5 W or 0.6 W through-hole metal film resistors

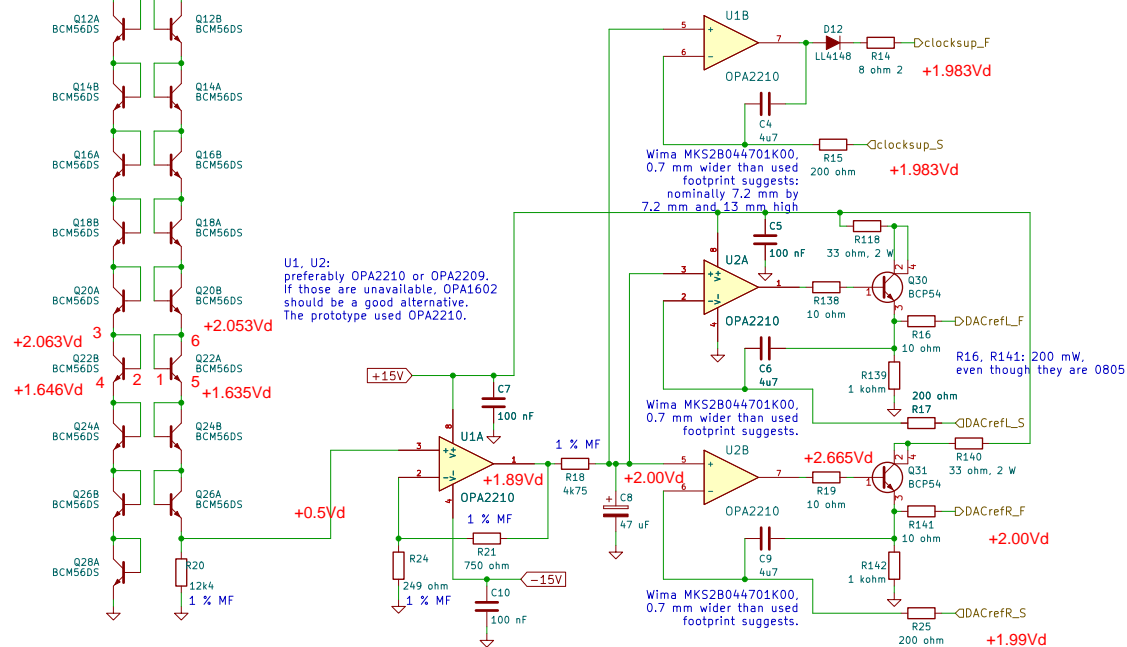

Sheet: /DAC3_ref/ File: DAC3_ref.kicad_sch		
Title:		
Size: A3	Date:	Rev:
KiCad E.D.A. kicad (6.0.8)		
Id: 2/5		

All DAC resistors thin film

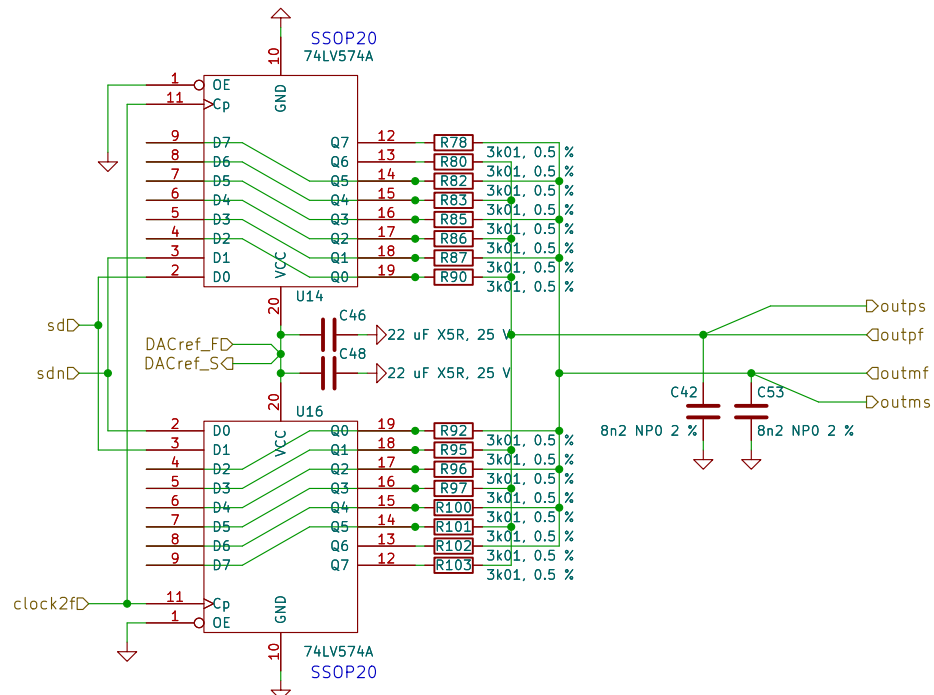

The 22 uF X5R capacitors can have a lower voltage rating (16 V or even 10 V) if their nonlinearity is not too extreme, that is, if they have at least 70 % of their nominal capacitance at 5 V. 1206 capacitors should also fit on the 1210 PCB footprints.

Sheet: /DAC3_coreL/
File: DAC3_core.kicad_sch

Title:


Size: A4
KiCad E.D.A. kicad (6.0.8)

Date:

Rev:

Id: 4/5

All DAC resistors thin film

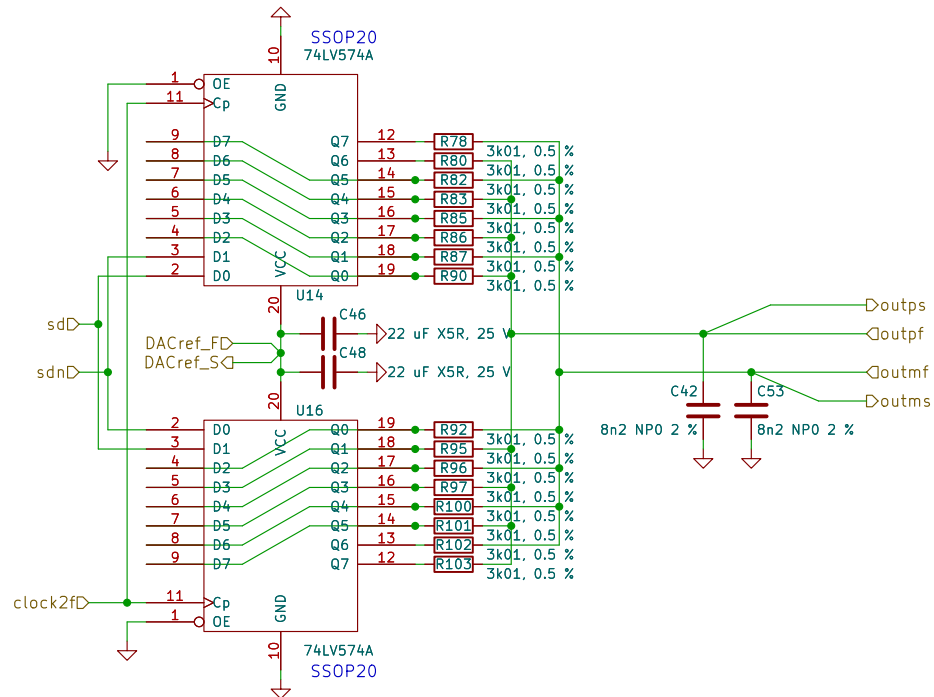

The 22 uF X5R capacitors can have a lower voltage rating (16 V or even 10 V) if their nonlinearity is not too extreme, that is, if they have at least 70 % of their nominal capacitance at 5 V. 1206 capacitors should also fit on the 1210 PCB footprints.

Sheet: /DAC3_coreR/
File: DAC3_core.kicad_sch

Title:

Size: A4
KiCad E.D.A. kicad (6.0.8)

Date:

Rev:

Id: 5/5