


OW 0 OW 1 SRO

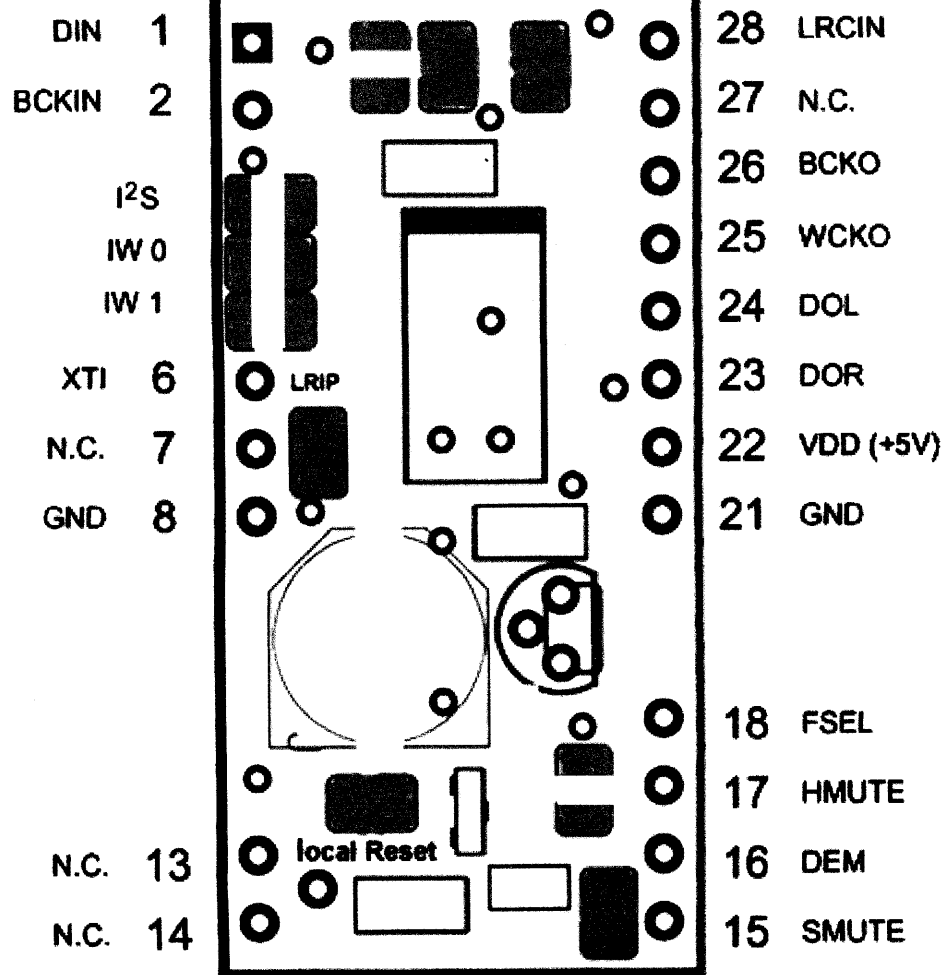

I²S	IW0	IW1	INPUT FORMAT
—	—	—	16-Bit, Standard, Right-Justified
—	X	—	20-Bit, Standard, Right-Justified
—	—	X	24-Bit, Standard, Right-Justified
—	X	X	24-Bit, Left-Justified
X	—	—	16-Bit, I²S
X	X	—	24-Bit, I²S

OW0	OW1	OUTPUT FORMAT
—	—	16-Bit
X	—	18-Bit
—	X	20-Bit
X	X	24-Bit

Factory setting:

16 bit standard input format

20 bit output format

slow-roll-off

local reset