



1750Q

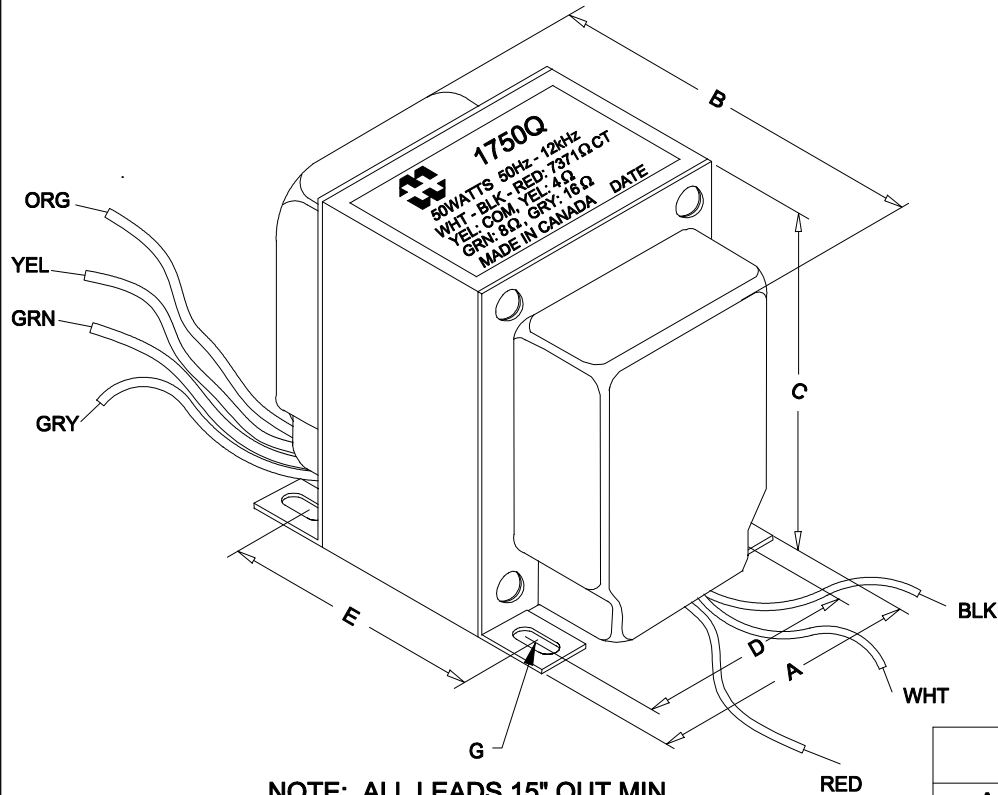

## DIMENSIONS:

A	3.125" ±0.063
B	3.280" ±0.125
C	3.750" ±0.063
D	2.500" ±0.063
E	2.440" ±0.063
G	0.188"X 0.406" ±0.015

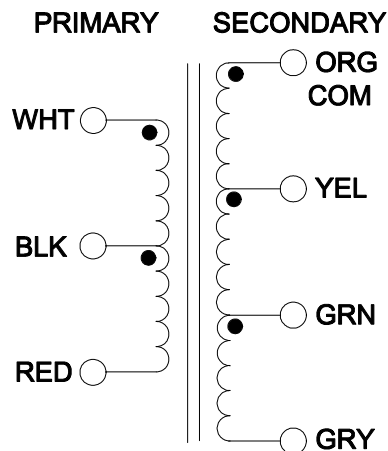

## ELECTRICAL DATA:

Turns ratio:	21.46 : 1
Inductance	@240V, 50Hz => 136.42H (Open circuit)
DCR	@ 20C, WHT - BLK = 81.61 Ω ±20%
	@ 20C, BLK - RED = 78.63 Ω ±20%
	@ 20C, ORG - YEL = 0.27 Ω ±20%
	@ 20C, YEL - GRN = 0.12 Ω ±20%
	@ 20C, GRN - GRY = 0.19 Ω ±20%
FREQ. RESP	@ 50W (424V), 50Hz - 12kHz, BLU - RED ±1db (1kHz Ref.)
Pri. Impedance	7371 Ω (Plate - Plate) (424V)
Sec. Impedance	4 Ω (14.1V 3.5A) / 8 Ω (20V 2.5A) / 16 Ω (28.3V 1.8A)
Power	50 WATTS



**HAMMOND  
ELECTRONICS**

52 RANKIN PLACE,  
WATERLOO, ONTARIO, N2L 3Z5.

PHONE (519) 886-6181  
FAX # (519) 886-9540

TITLE

OUTPUT TRANSFORMER

1750Q

			DR BY IOAN POP
0	05/11/09	PRELIMINARY.	I.P. DATE 05/11/09
NO	DATE	REVISION	DIM IN(X)MM( )