





Ethernet and USB connectors with optional surge protection

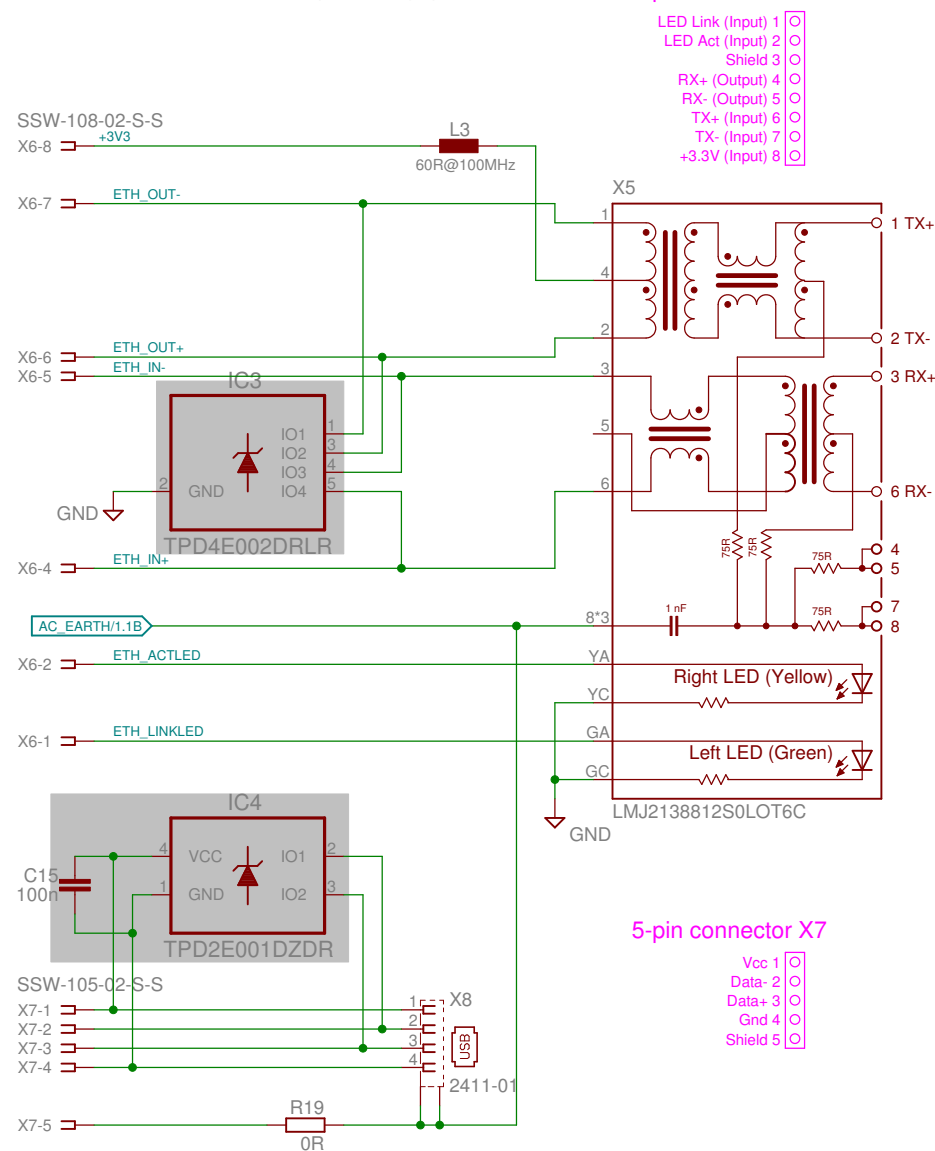

Note 2.1: Mount X5 and X8 on the opposite (top) side of the PCB. Use 14 mm (e.g. Bossard B3X14/BN3320) for enclosure with 3 mm rear panel

12VDC fan control

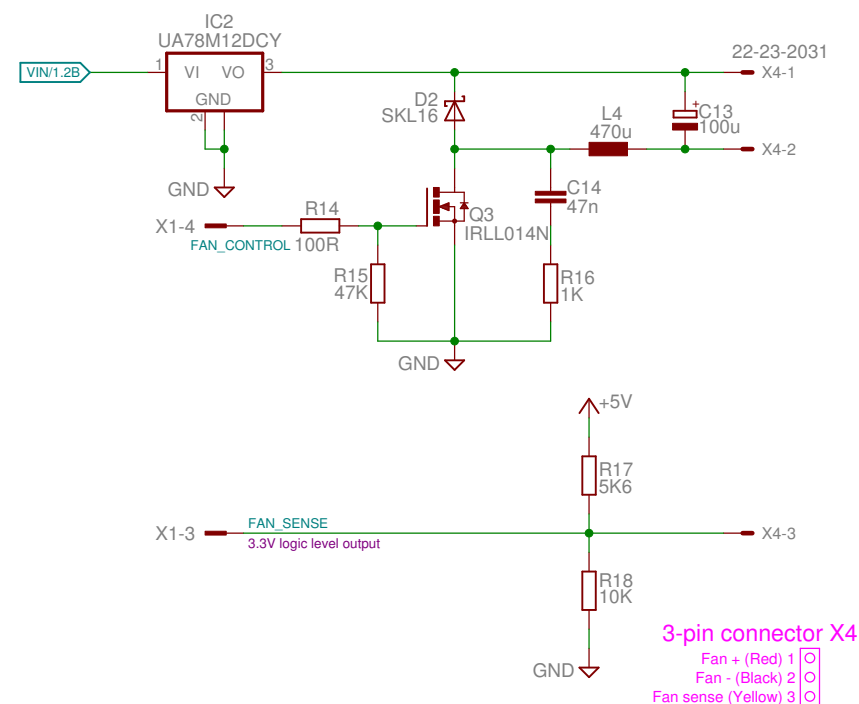

Ethernet and USB PCB connectors  
12VDC fan driver (max. 300 mA)

TITLE: EEZ AUX PS r5B6

Document Number:

REV:

Date: 04. 03. 2016. 09:30

Sheet: 2/2